



Customer information packet

VEBM3611T-D

3HP, 1760RPM, 3PH, 60HZ, 182TC, 3632M, TEFC, F3

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CE CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Brake Torque	15.0 lb-ft
Current @ Voltage	8.400 A @ 230.0 V 9.000 A @ 208.0 V 4.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Fan Housing Cover For Brake

Part detail

Revision	AA
Type	AC
Mech. spec.	36N149
Base	
Status	PRD/A
Elec. spec.	36WGS266
Layout	36LYN149
Eff. date	09-07-2023
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	09-27-2010

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3632M
Mounting Arrangement	F3
Number of Poles	4
Overall Length	21.64 IN
Power Factor	75
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2934L									
CAT.NO.	VEBM3611T-D								
SPEC.	36N149S266G1								
HP	3/2.2KW								
VOLTS	230/460								
AMP	8.4/4.2 BRAKE 15 FT-LB								
R.P.M. (1/MIN)	1760								
FRAME	182TC		HZ	60		PH	3		
SER.F.	1.15		CODE	K		DES	B	CL	F
NEMA-NOM-EFF	89.5		PF	75					
RATING	40C AMB-S1 CONT								
CC	010A								
DE	6206		ODE	6205					
ENCL	TEFC		SN						
	IE3-89.5(75%)87.8(50%)								

AC Induction Motor Performance Data

Record # 53364

Typical performance - not guaranteed values

Winding: 36WGS266-R006			Type: 3632M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		3	Full Load Torque		8.8 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		8.4/4.2	Breakdown Torque		37.6 LB-FT		
R.P.M.		1760	Pull-up Torque		15.2 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		21.7 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		32.7 A
Service Factor (S.F.)		1.15		No-load Current		2.3 A	
NEMA Nom. Eff.		89.5	Power Factor	75	Line-line Res. @ 25°C		3.81 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		44°C	
S.F. Amps				Temp. Rise @ S.F. Load		52°C	
				Locked-rotor Power Factor		42.2	
				Rotor inertia		0.298 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	55	68	75	80	82	77
Efficiency	81.1	87.8	89.6	89.8	89.7	88.2	89.2
Speed	1791	1783	1773	1764	1753	1741	1754
Line amperes	2.47	2.85	3.43	4.09	4.89	5.78	4.63


ABB Motors and Mechanical Inc.

WINDING # 36WGS266

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1760 RPM 460 V 3632M

TORQUES (LB-FT): PO=37.6 PU=15.2 LR=21.7 LRA=32.7

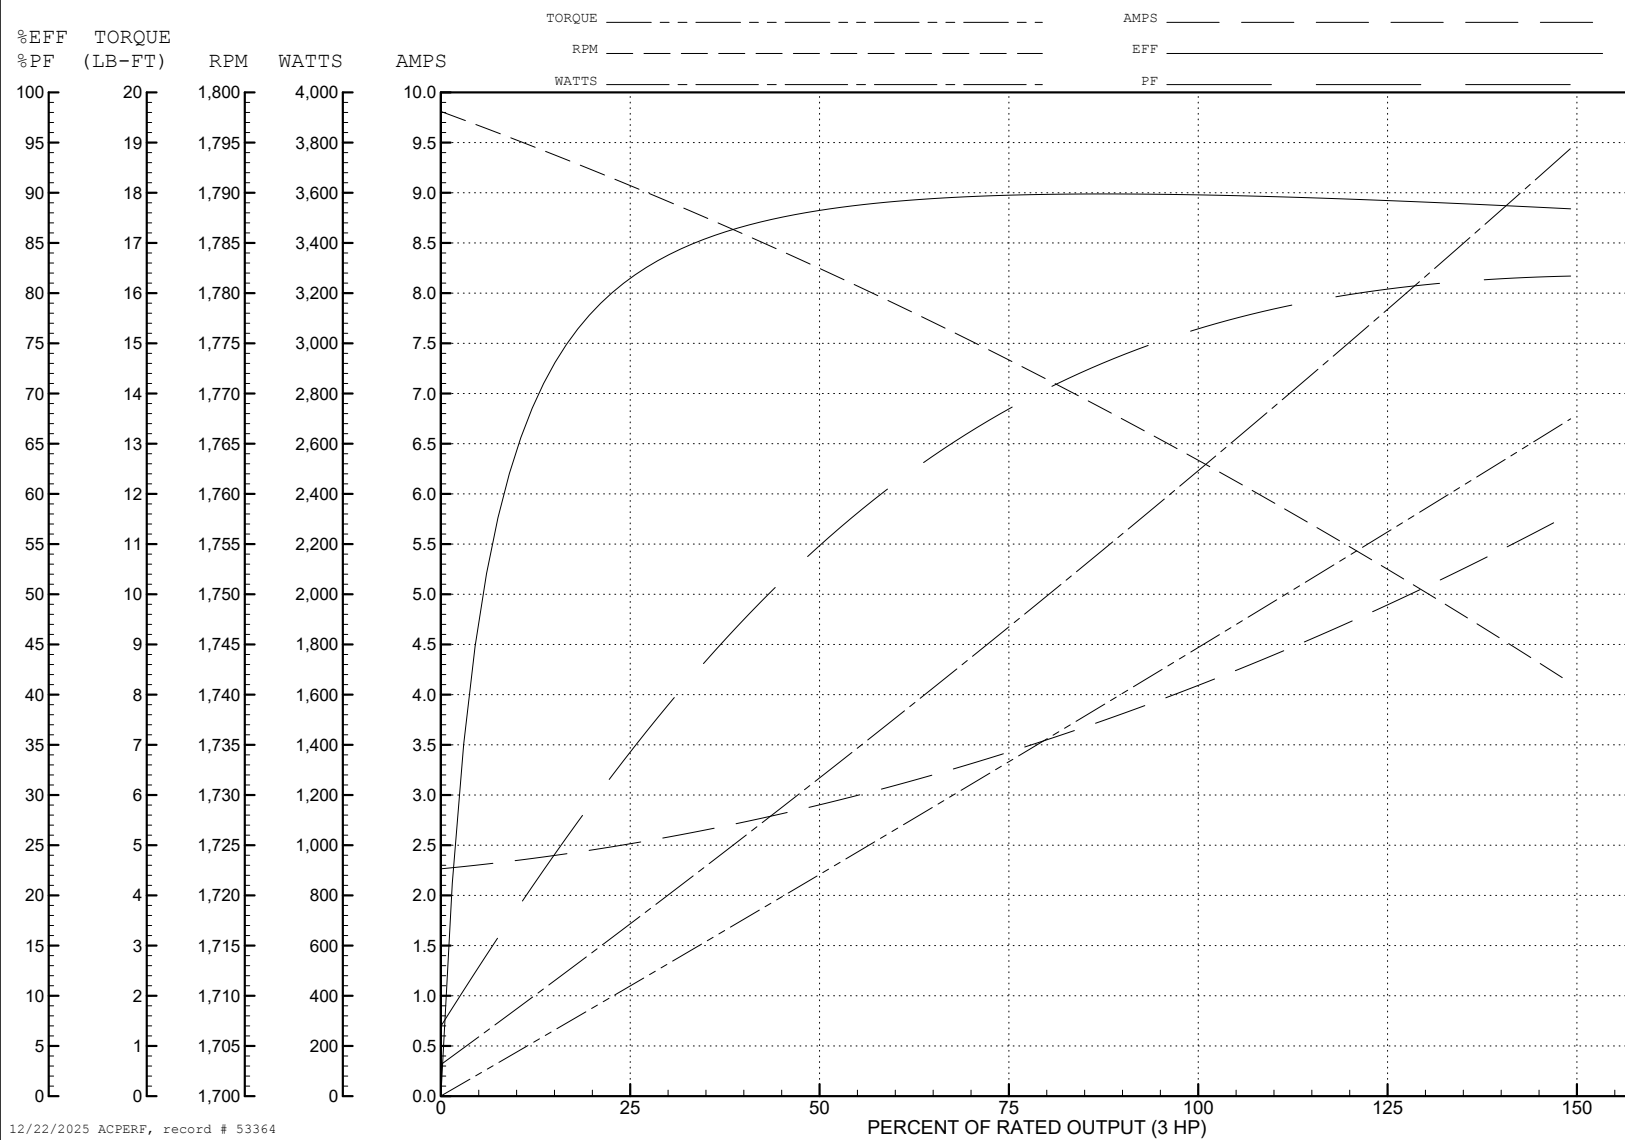

AC Induction Motor Performance Data

Record # 57957

Typical performance - not guaranteed values

Winding: 36WGS266-R006		Type: 3632M	Enclosure: TEFC
Nameplate Data		230 V, 60 Hz: Low Voltage Connection	
Rated Output (HP)	3	Full Load Torque	8.8 LB-FT
Volts	230/460	Start Configuration	direct on line
Full Load Amps	8.4/4.2	Breakdown Torque	37.6 LB-FT
R.P.M.	1760	Pull-up Torque	15.2 LB-FT
Hz	60 Phase	Locked-rotor Torque	21.7 LB-FT
NEMA Design Code	B KVA Code	Starting Current	65.4 A
Service Factor (S.F.)	1.15	No-load Current	4.6 A
NEMA Nom. Eff.	89.5 Power Factor	Line-line Res. @ 25°C	0.953 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	44°C
S.F. Amps		Temp. Rise @ S.F. Load	52°C
		Locked-rotor Power Factor	42.2
		Rotor inertia	0.298 LB-FT ²

Load Characteristics 230 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	55	68	75	80	82	78
Efficiency	81.1	87.8	89.6	89.8	89.7	88.2	89.7
Speed	1791	1783	1773	1764	1753	1741	1757
Line amperes	4.94	5.7	6.86	8.18	9.78	11.6	9.14


ABB Motors and Mechanical Inc.


WINDING # 36WGS266


Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1760 RPM 230 V 3632M

TORQUES (LB-FT): PO=37.6 PU=15.2 LR=21.7 LRA=65.4

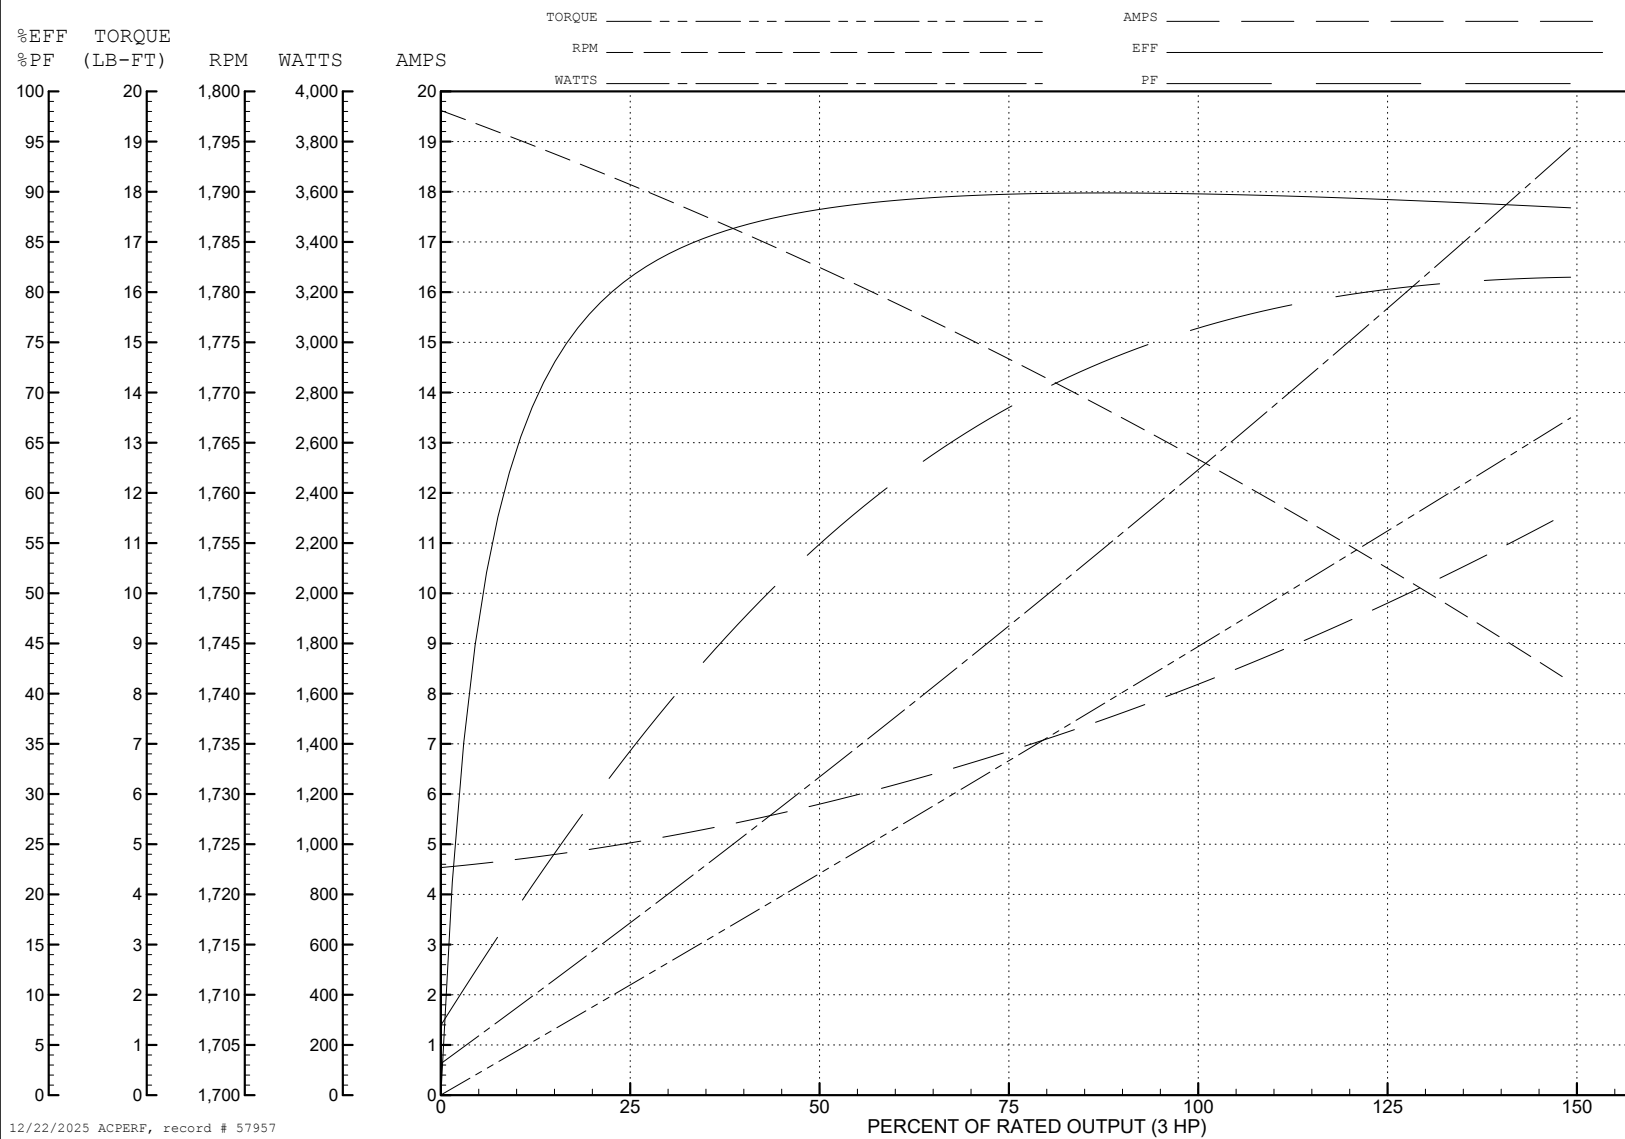

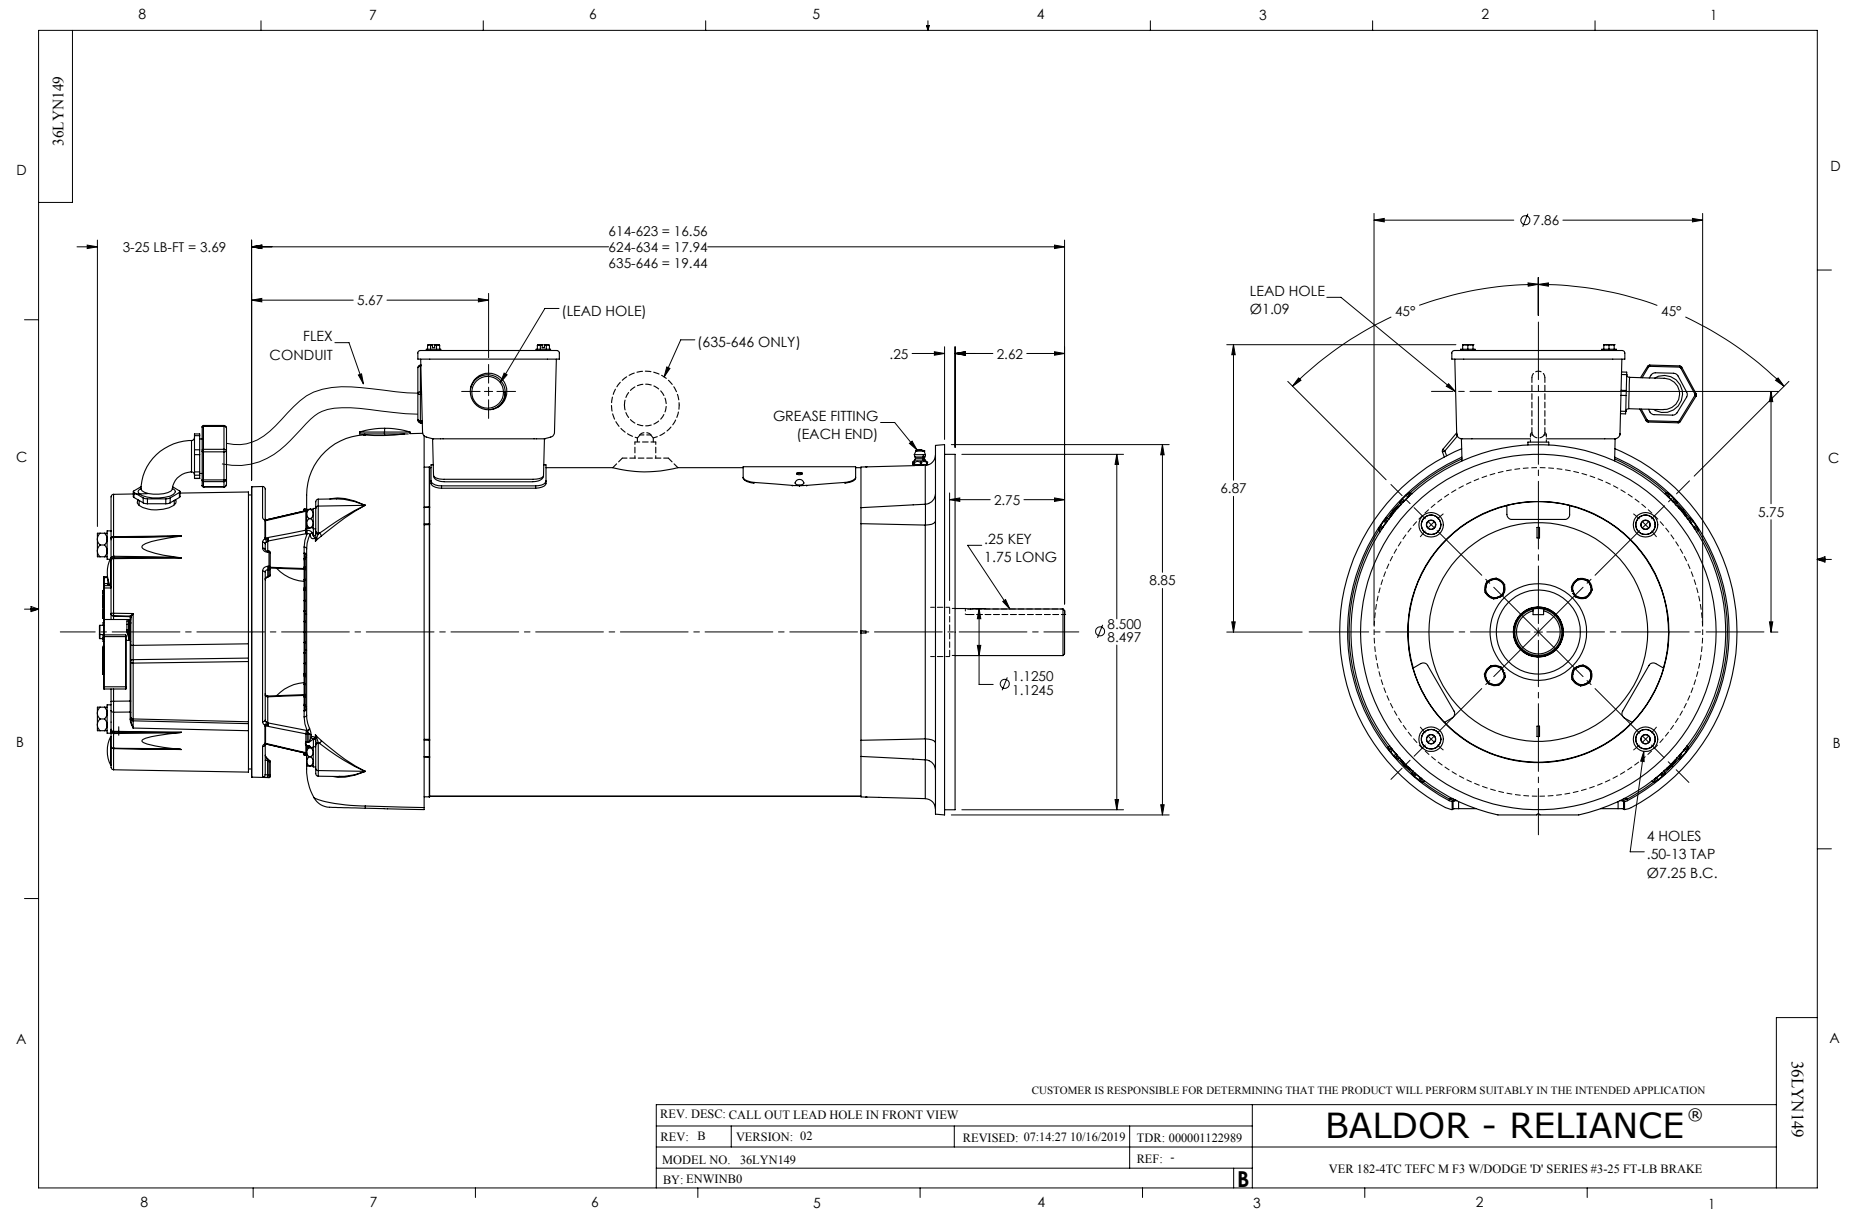

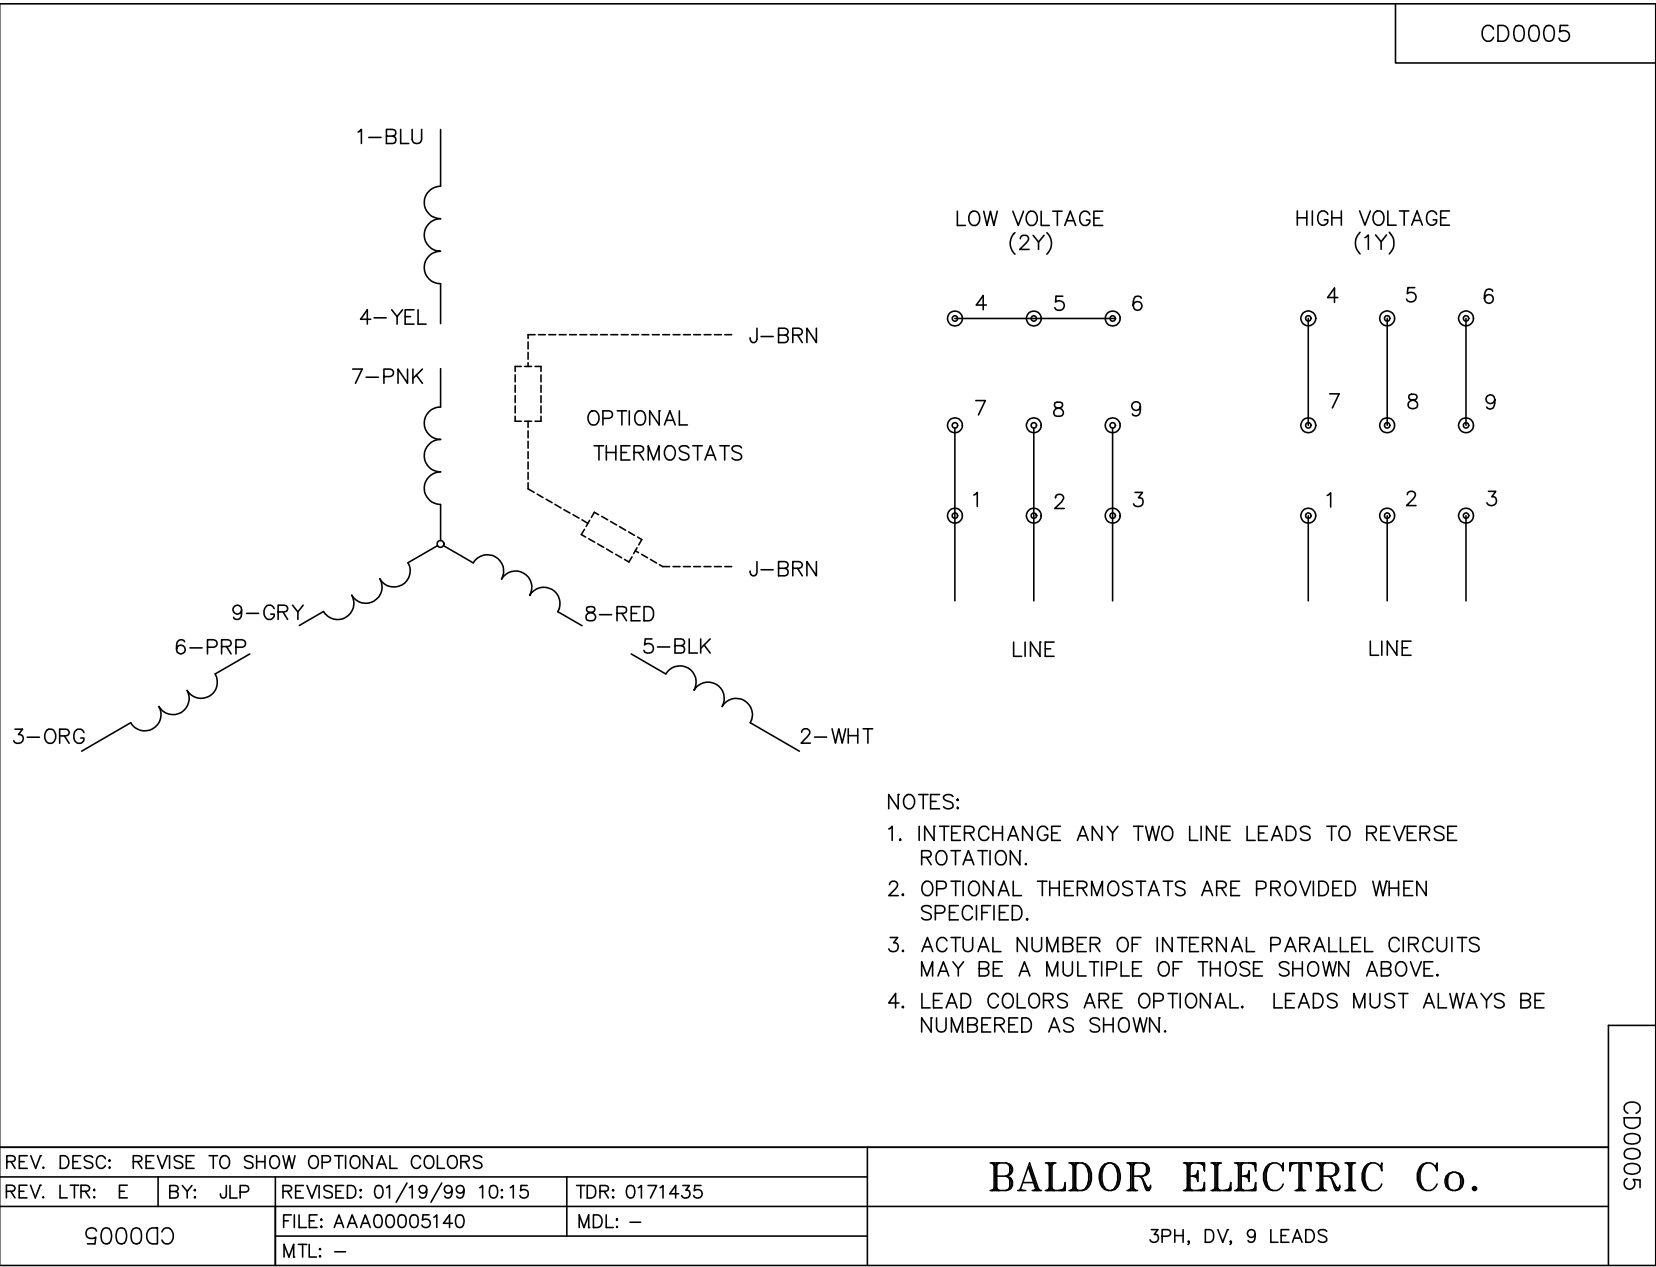

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4
				B1 WHITE B2 BLACK B3 GRAY B4 BLUE B5 RED

CD2120

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000000741785

FILE: \CKA\00037\282

REVISED: 12: 28:11 04/12/2012

MTL: -

BY: CKRONSO

BALDOR • DODGE • RELIANCE

D-SERIES MOTOR BRAKE 5LD AC\DC

SH 1 of 1