



Customer information packet

VECP4103T

25HP, 1775RPM, 3PH, 60HZ, 284TC, 1054M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	284TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	0.8
Current @ Voltage	64.000 A @ 208.0 V 62.000 A @ 230.0 V 31.000 A @ 460.0 V
Design Code	A
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated

Part detail

Revision	L
Type	AC
Mech. spec.	10G312
Base	
Status	PRD/A
Elec. spec.	10WGZ651
Layout	10LYG312
Eff. date	09-29-2025
CD Diagram	CD0180
Poles	04
Leads	9#10 Y
Proprietary	False
Created date	10-19-2017

Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	31.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1054M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	30.70 IN
Power Factor	81
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1775 rpm
Speed Code	Single Speed

Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3241

CAT.NO.	VECP4103T			P/N		ENCLOSURE			TEFC	
SPEC.	10G312Z651G1			CC	010A	FRAME	284TC		S/N	
HP	25			CLASS	F	HZ	60	DES	A	
RPM	1775			RPM MAX	2700		PH	3	KVA-CODE	J
VOLT	230/460			MOTOR WEIGHT			515			
AMP	62/31			SER.F.	1.15	PF	81	ODE BRG	6311	DE BRG 6311
RATING	40C AMB-CONT			NEMA-NOM-EFF			93.6	GREASE	POLYREX EM	
							INV.TYPE		PWM	
TEMP CODE	T3C		INVERTER-TEMP-CODE			180				
TEMP =	160	C HP FR	60	C HP TO	90					
CT HZ FROM	0.8	CT HZ TO		60						
HTR-VOLTS	HTR-AMPS		HTR-WATTS		MAX. SPACE HEATER TEMP.			VT HZ FROM O		VT HZ TO 60

AC Induction Motor Performance Data

Record # 67465

Typical performance - not guaranteed values

Winding: 10WGZ651-R006			Type: 1054M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		25		Full Load Torque		74.02 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		62/31		Breakdown Torque		262 LB-FT	
R.P.M.		1775		Pull-up Torque		118 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		142 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		223 A
Service Factor (S.F.)		1.15		No-load Current		13.6 A	
NEMA Nom. Eff.		93.6	Power Factor	81	Line-line Res. @ 25°C		0.2345 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		51°C	
S.F. Amps				Temp. Rise @ S.F. Load		61°C	
				Locked-rotor Power Factor		30.6	

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	65	76	81	84	85	83
Efficiency	88.3	92.8	93.9	94	93.7	93.1	93.8
Speed	1794.1	1789.3	1783.5	1777.8	1770.8	1763.8	1774
Line amperes	15.3	19.3	24.6	30.6	37.2	44.5	34.6


ABB Motors and Mechanical Inc.


WINDING # 10WGZ651

Typical performance - not guaranteed values.


25 HP 3 PH 60 HZ 1775 RPM 460 V 1054M

TORQUES (LB-FT): PO=262 PU=118 LR=142 LRA=223

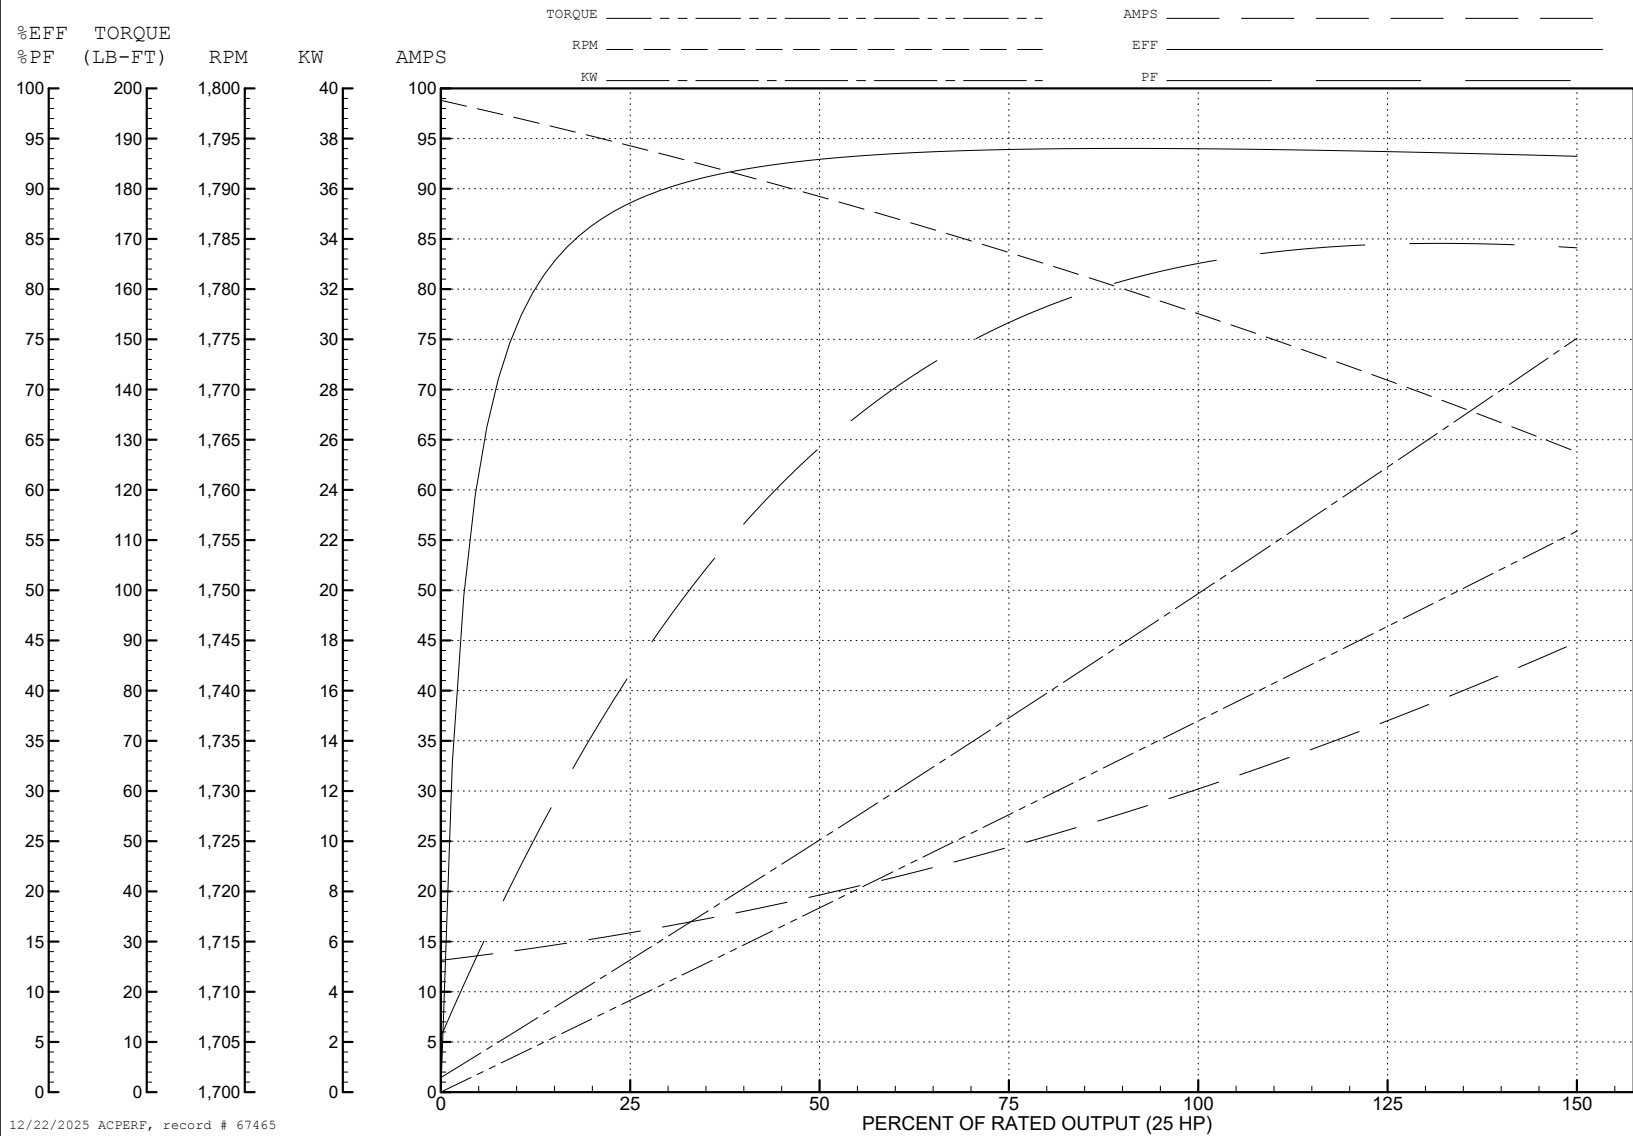

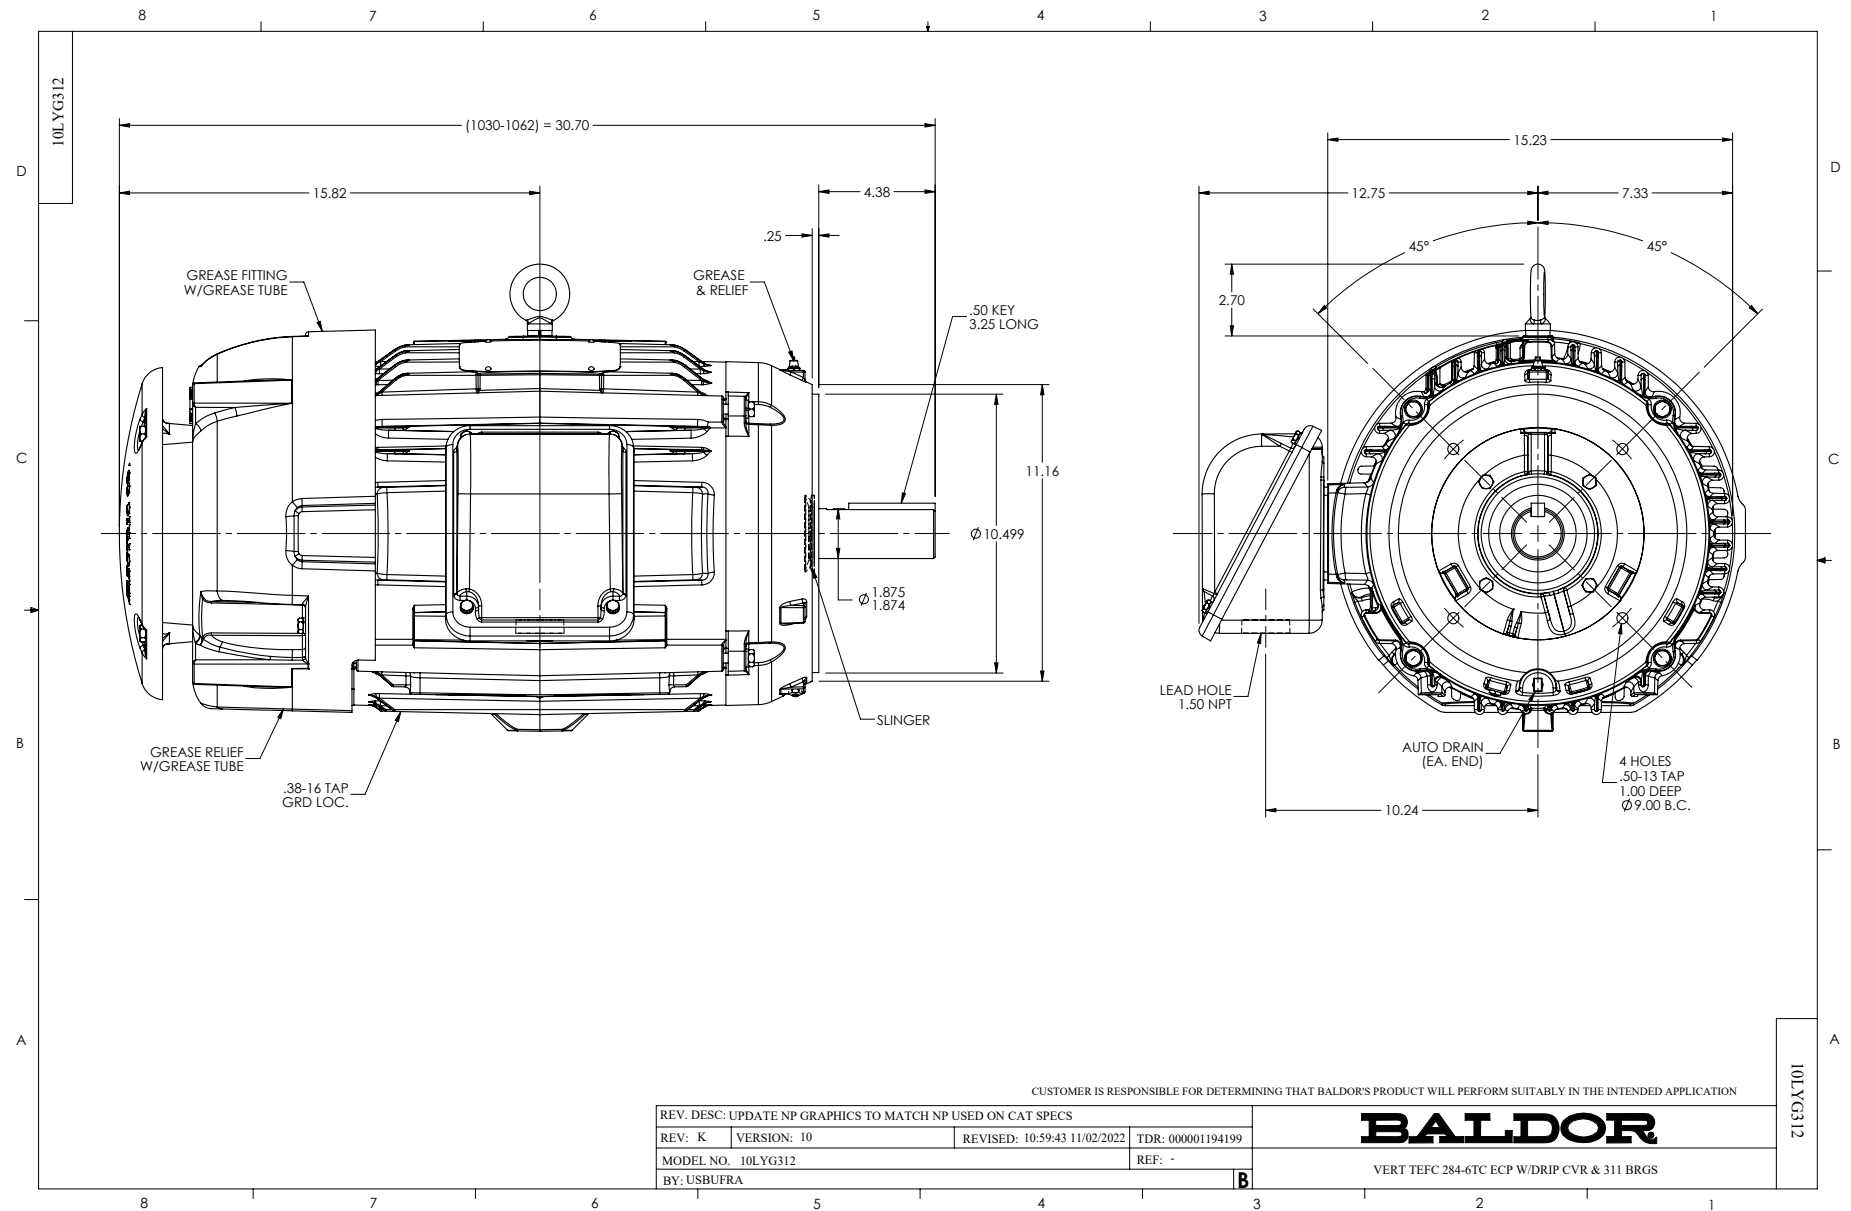

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1