



Customer information packet

VECP82394T-4

15HP, 3510RPM, 3PH, 60HZ, 254TC, 0934M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	254TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.3
Current @ Voltage	17.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	AJ
Type	AC
Mech. spec.	09K208
Base	
Status	PRD/A
Elec. spec.	09WGY948
Layout	09LYK208
Eff. date	12-02-2025
CD Diagram	CD0006
Poles	02
Leads	3#12
Proprietary	False
Created date	07-26-2013

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	17.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 12 AWG
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0934M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	25.28 IN
Power Factor	89
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4332

STK.NO.	VECP82394T-4			P/N				ENCLOSURE	TEFC				
SPEC.	09K208Y948			CC	010A	FRAME	254TC	S/N					
HP	15			CLASS	F	HZ	60	ODE BRG	6309	DE BRG	6309		
RPM	3520	RPM MAX	5400	PH	3	DES	B	D.E. BRG.	45BC03X30X				
VOLT	460			KVA-CODE	G		O.D.E. BRG.	45BC03X30X					
AMP	17			MOTOR WEIGHT			304	GREASE	POLYREX EM				
RATING	40C AMB-CONT			MAX. KVAR			1.6	BLANK					
NEMA-NOM-EFF	91	# OF ROTOR BARS			28	SER.F.	1.15	IP					
G.MIN.EFF	89.5	# OF STATOR SLOTS			36	PF	89	INV.TYPE	PWM				
TEMP CODE	T3C	INVERTER-TEMP-CODE			180								
TEMP =	160	C HP FR	60	C HP TO	90								
CT HZ FROM	1.3	CT HZ TO	60										
HTR-VOLTS	HTR-AMPS			HTR-WATTS			MAX. SPACE HEATER TEMP.			VT HZ FROM	0-	VT HZ TO	60

AC Induction Motor Performance Data

Record # 47078

Typical performance - not guaranteed values

Winding: 09WGY948-R035				Type: 0934M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		15		Full Load Torque		22.2 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		17		Breakdown Torque		119 LB-FT	
R.P.M.		3520		Pull-up Torque		22.7 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		B		KVA Code		G	
Service Factor (S.F.)		1.15		Starting Current		116 A	
NEMA Nom. Eff.		91		Power Factor		89	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	
S.F. Amps						Temp. Rise @ S.F. Load	
						Locked-rotor Power Factor	
						Rotor inertia	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	63	82	88	91	92	92	92
Efficiency	87.5	91.5	92.2	91.8	90.9	89.7	91.3
Speed	3583	3565	3547	3527	3505	3481	3514
Line amperes	6.42	9.31	12.9	16.8	21	25.6	19.3


ABB Motors and Mechanical Inc.


WINDING # 09WGY948

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 3520 RPM 460 V 0934M

TORQUES (LB-FT): PO=119 PU=22.7 LR=36.5 LRA=116

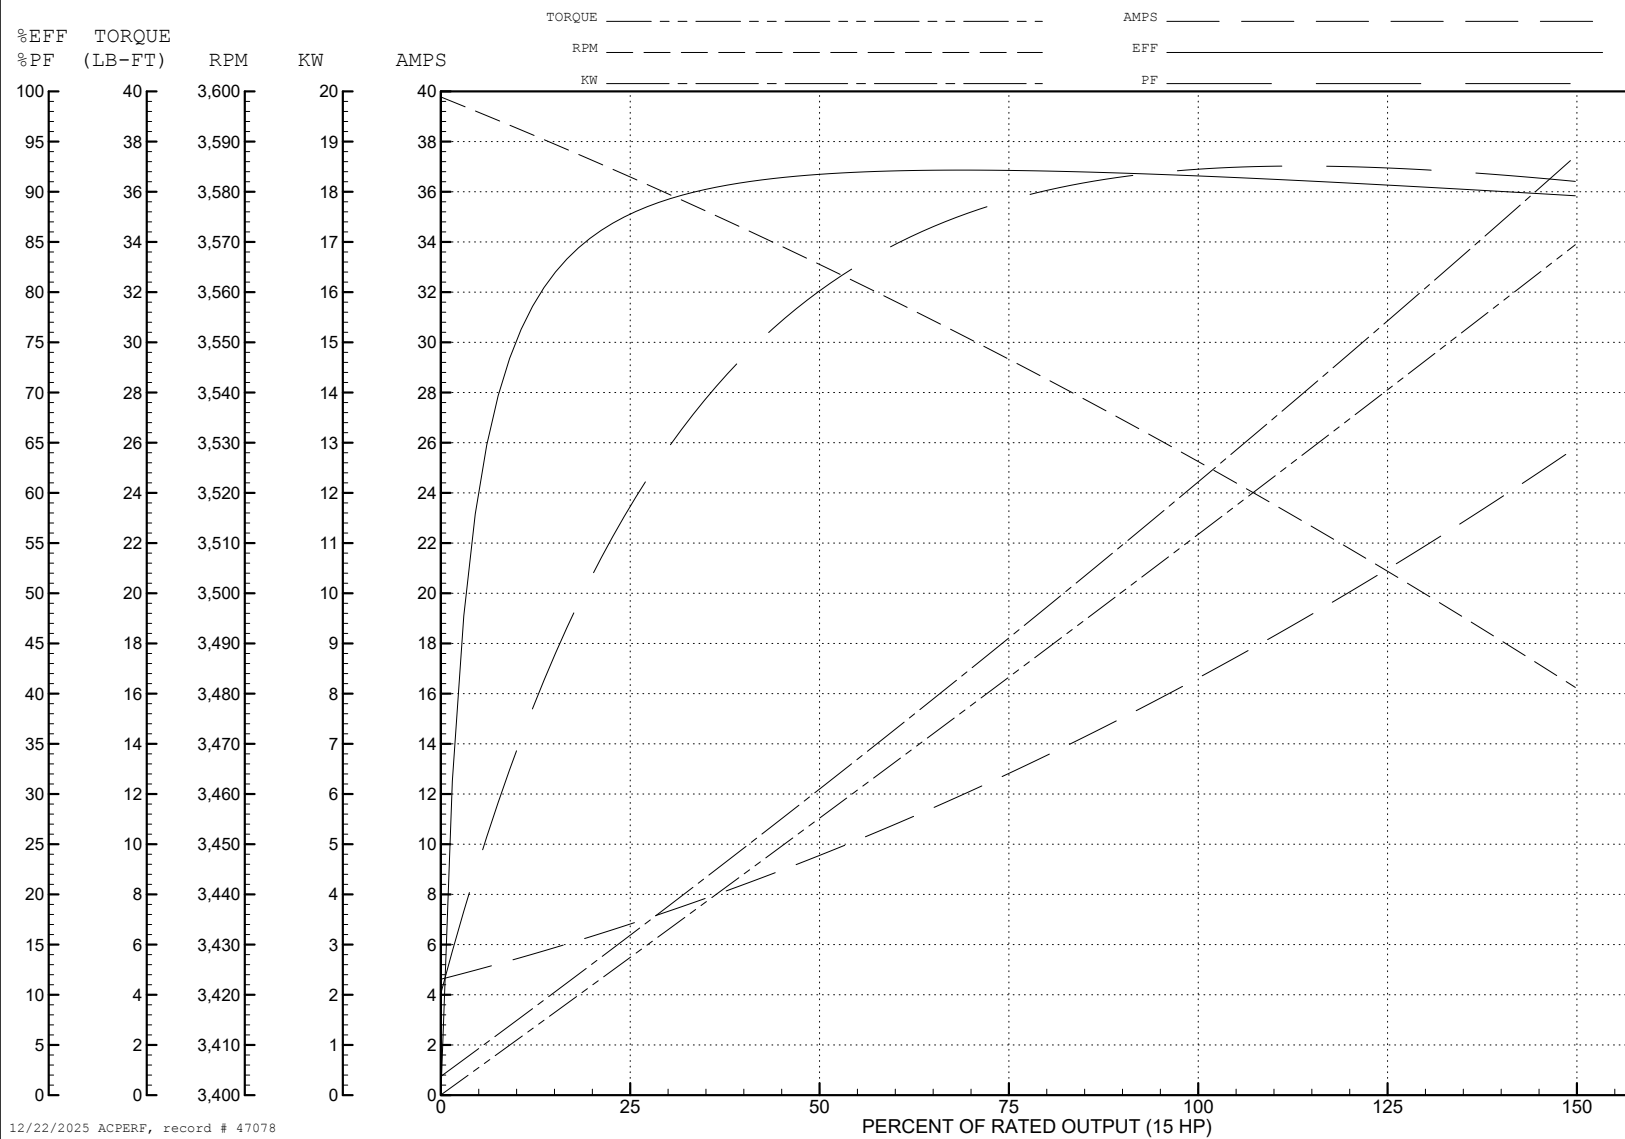

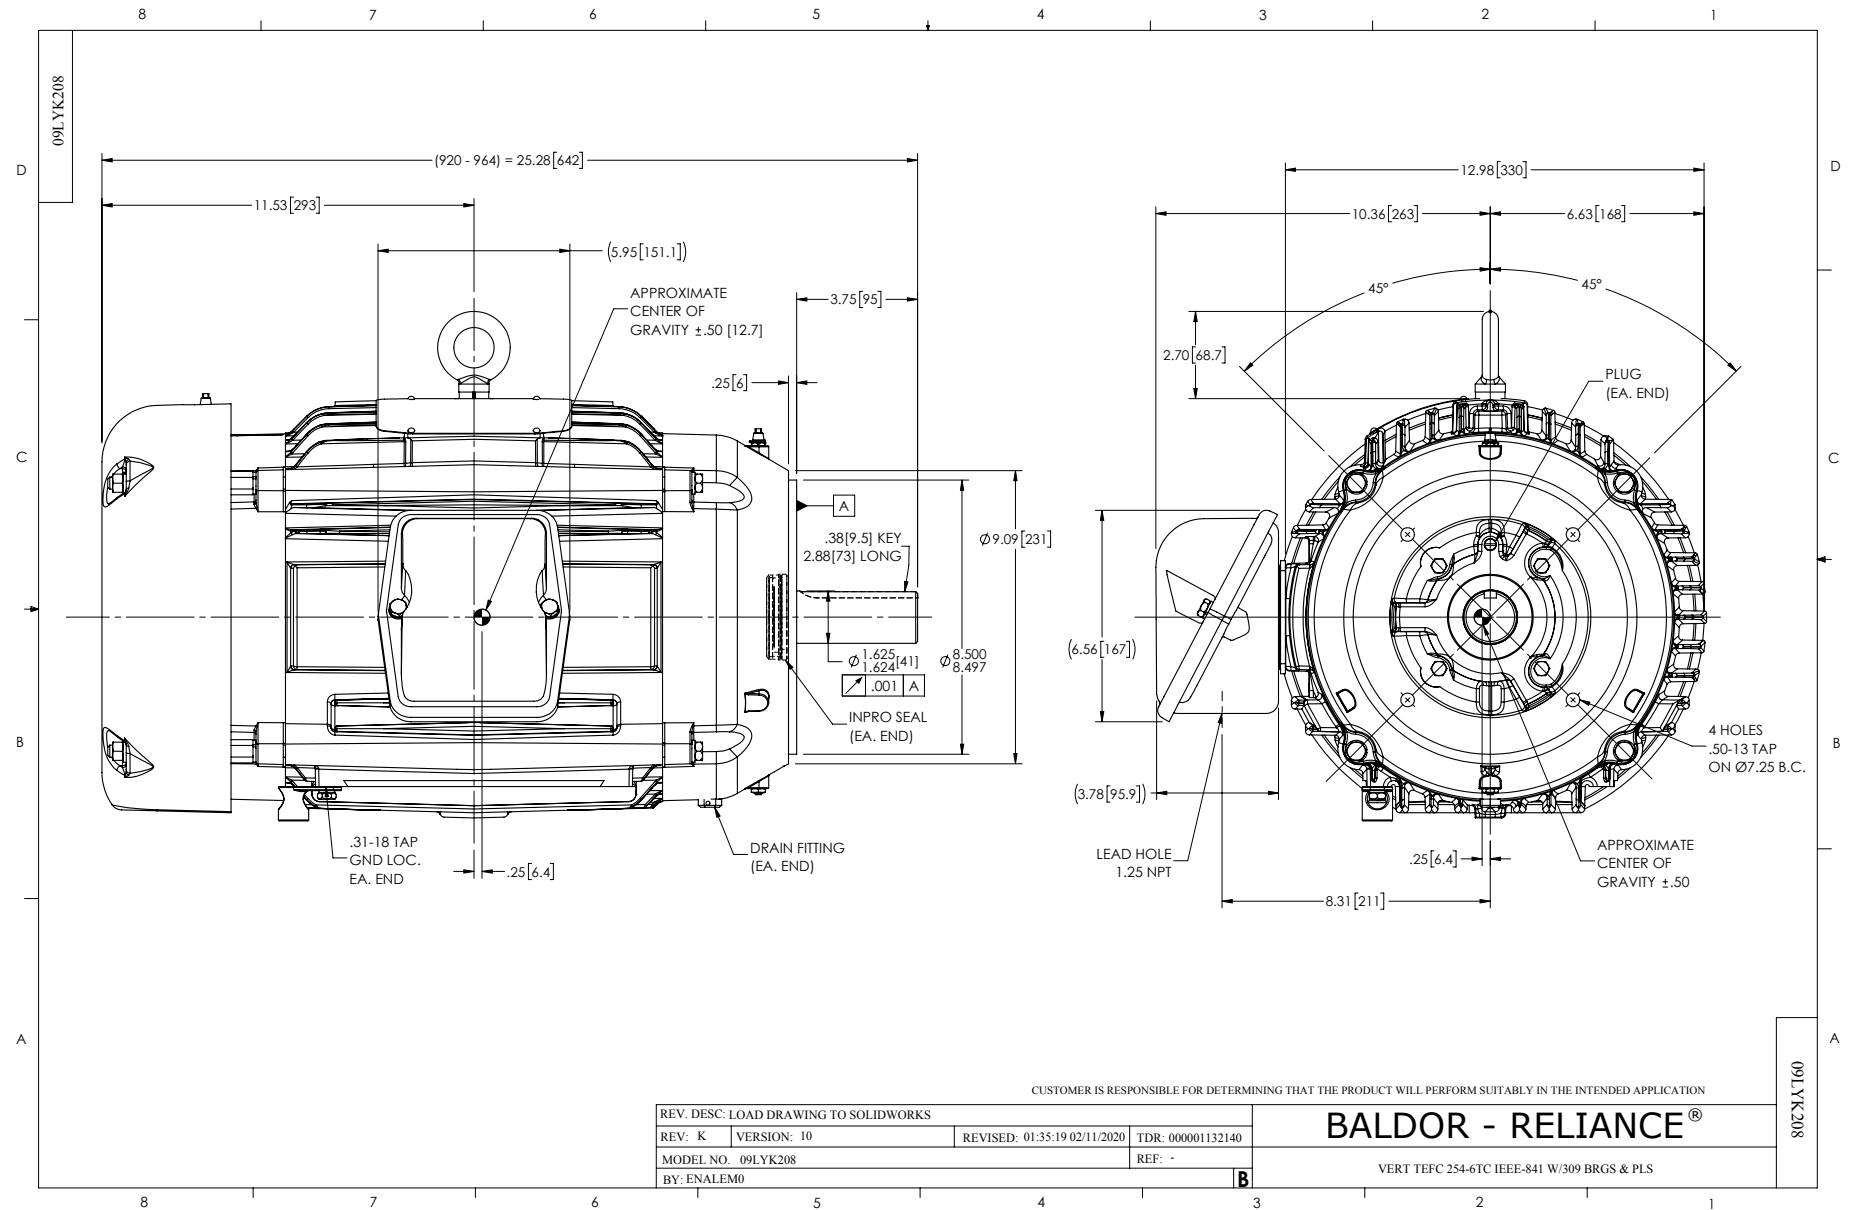

CD0006

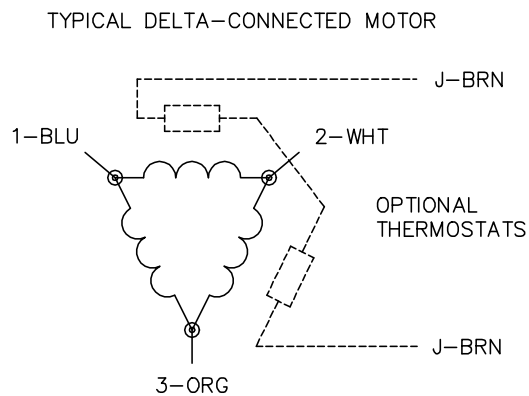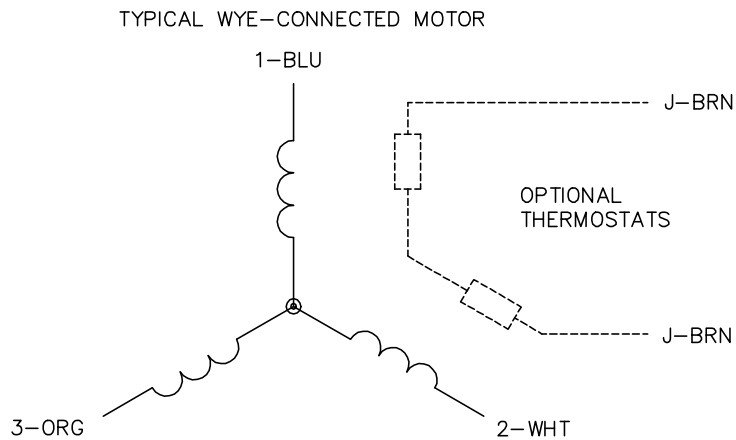

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1