



Customer information packet

VFSSP5M3611T-E-G

3HP, 1800RPM, 3PH, 60HZ, 184TC, 3624B, TENV, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	184TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Brushless Wound Field PM Rotor
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	WEEE C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.700 A @ 460.0 V 7.400 A @ 230.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.7 a
Insulation Class	H

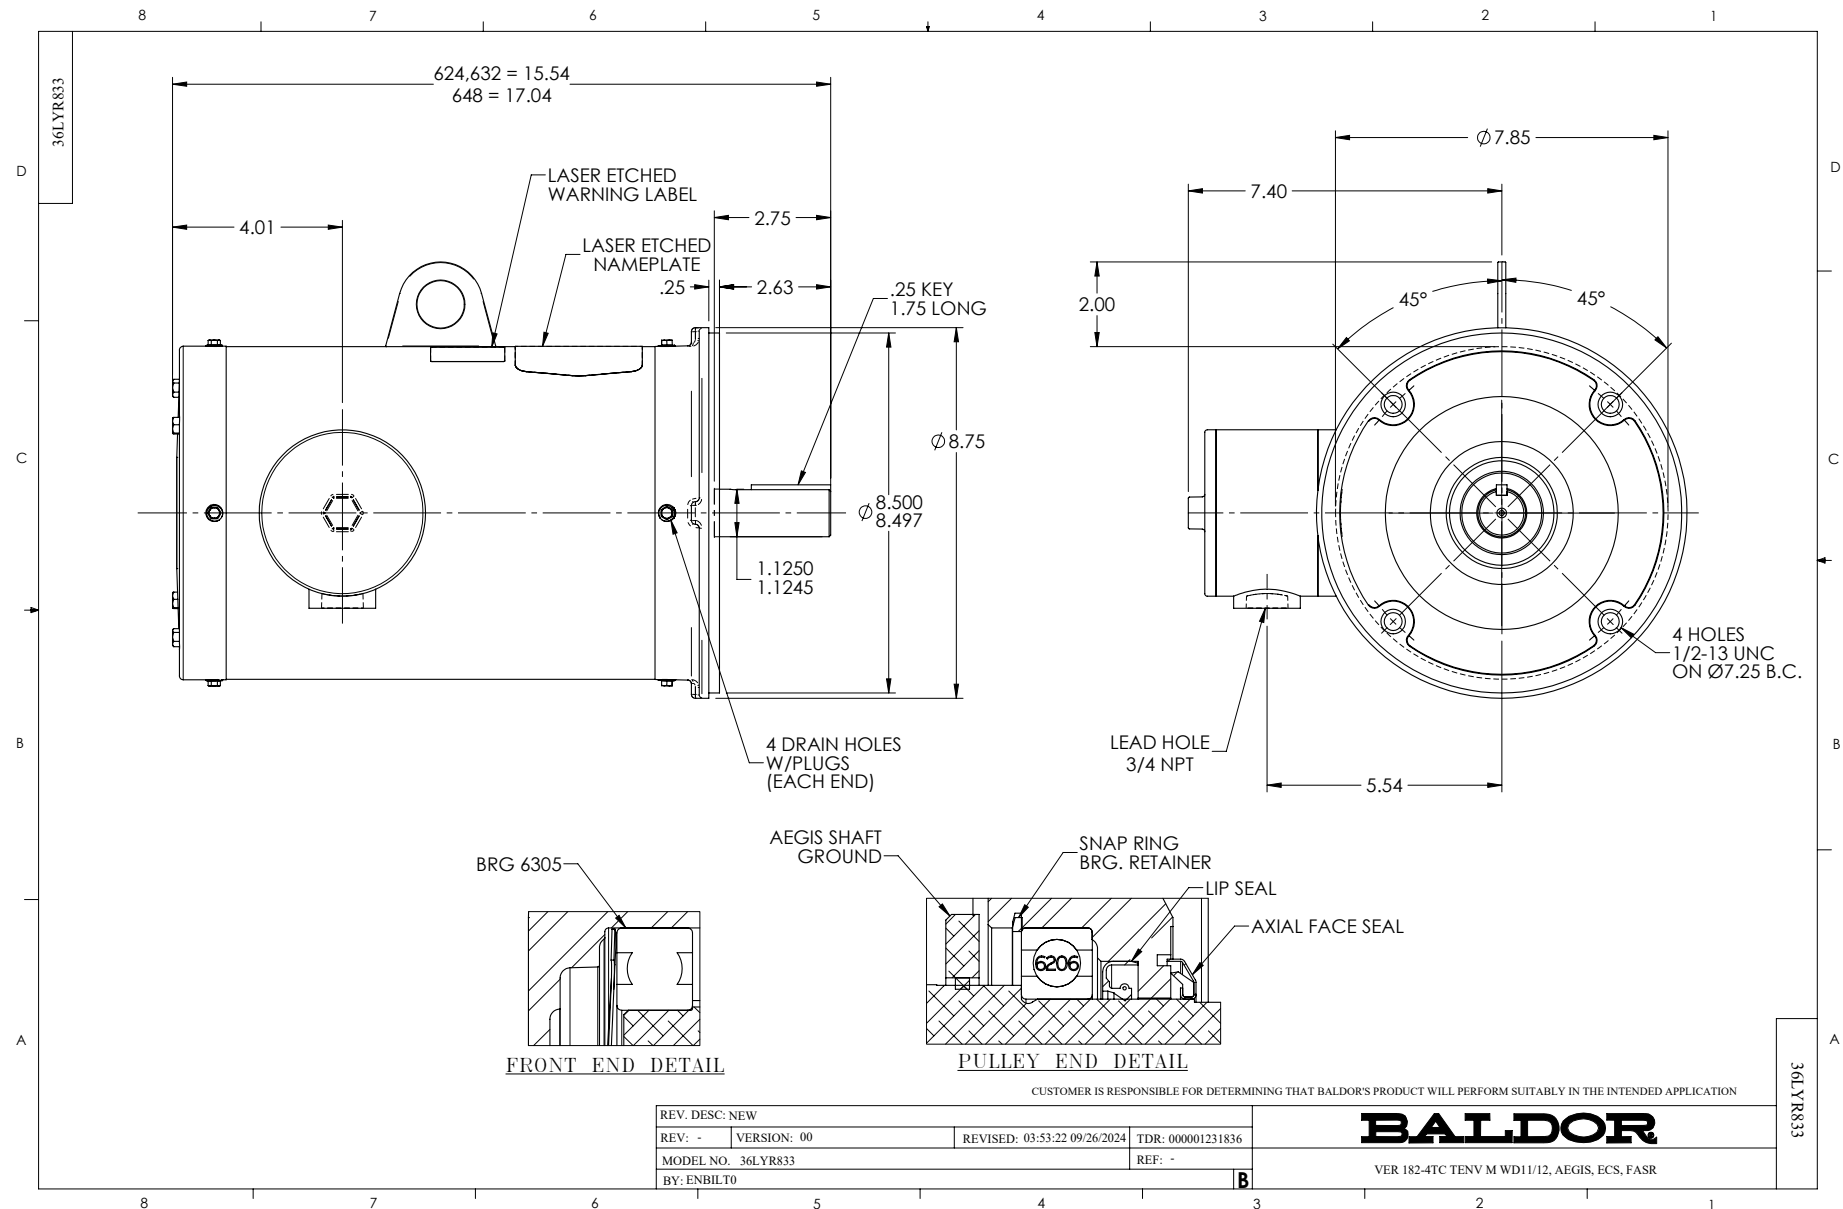
Part detail

Revision	B
Type	AC
Mech. spec.	36R833
Base	
Status	PRD/A
Elec. spec.	36WGL136
Layout	36LYR833
Eff. date	01-28-2025
CD Diagram	CD0005A25
Poles	04
Leads	9#12
Proprietary	False
Created date	09-26-2024

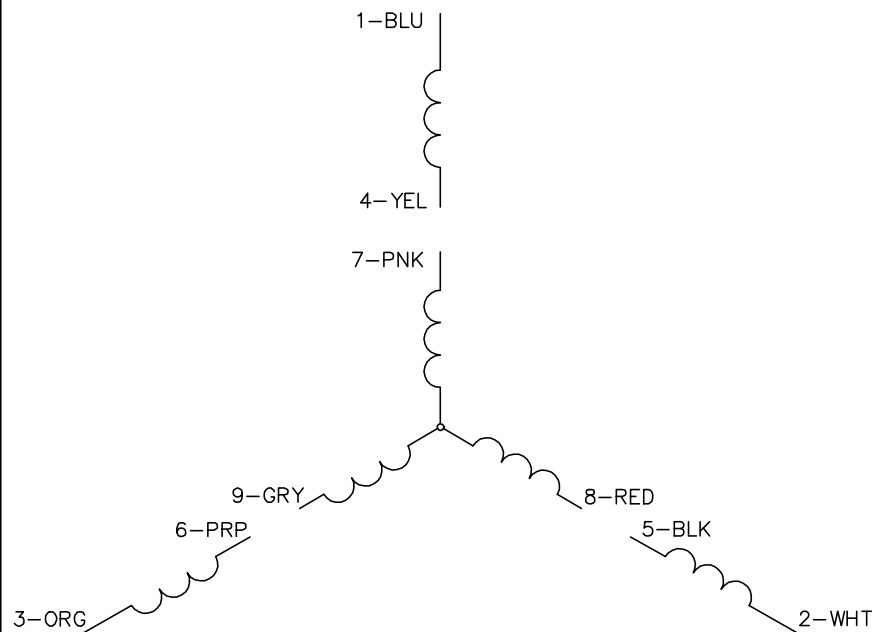

Inverter Code	03
KVA Code	-
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	4000 rpm
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3624B
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.54 IN
Power Factor	81
Product Family	WD All SS Encapsulated
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1800 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4427DLT49A												
CAT #	VFSSP5M3611T-E-G					WT	83		LBS			
SPEC	36R833L136G1					ENCL			TENV			
SER #				FRAME		184TC			IP		69	
HP	3		RATING			40C AMB-CONT						
NEMA NOM. EFF	90.2	PF	81	HZ	60	PH		3	CLASS		H	
VOLTS	230/460				AMPS		7.4/3.7					
SER.F.	1.15	RPM		1800			MAX RPM			4000		
BEMF (V)	106/212			RS (OHMS)				0.97/3.88				
LD(MH)	14.4/57.7			LQ(MH)			54.4/217.7					
VPWM	CHP	60		TO		133						
CT	6	TO		60		VT	6		TO		60	
MATCHED INV	ACS380-04XX-09A8-2 / 07A2-4											
DE	6206			ODE		6305			YR			



CD0005A25

LOW VOLTAGE
(2Y)

U V W

INVERTER

HIGH VOLTAGE
(1Y)

U V W

INVERTER

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: NEW	VERSION: 00	TDR: 000001135746
REV. LTR: -	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
FILE: \AAA\00253\082		
MTL: -		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1

CD0005A25