



Customer information packet

VFSWDL3510

1HP, 1725RPM, 1PH, 60HZ, 56C, 3538L, TEFC, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	1.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.100 A @ 115.0 V 5.500 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	5.5 a
Insulation Class	F

Part detail

Revision	C
Type	AC
Mech. spec.	35E4628
Base	
Status	PRD/A
Elec. spec.	35WGG402
Layout	35LYE4628
Eff. date	07-02-2024
CD Diagram	CD0648
Poles	04
Leads	7#18
Proprietary	False
Created date	08-01-2022

Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Finish	UNPAINTED
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3538L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.26 IN
Power Factor	79
Product Family	WD All SD Non-Encapsulated
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

AC Induction Motor Performance Data

Record # 91187

Preliminary Data Sheet

Winding: 35WGG402-R001			Type: 3538L		Enclosure: TEFC		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		1	Full Load Torque		3.06 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		11.1/5.5	Breakdown Torque		9.56 LB-FT		
R.P.M.		1725	Pull-up Torque		5.55 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		8.58 LB-FT	
NEMA Design Code		L	KVA Code	K	Starting Current		76.9 A
Service Factor (S.F.)		1.15		No-load Current		6.33 A	
NEMA Nom. Eff.		74	Power Factor	79	Line-line Res. @ 25°C		0.44 Ω A Ph 0.977 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		62°C	
S.F. Amps				Temp. Rise @ S.F. Load		71°C	
				Locked-rotor Power Factor		94.2	
				Rotor inertia		0.275 lb-ft²	

Load Characteristics 115 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	36	55	68	76	81	79	79
Efficiency	68.8	76.9	77.4	75.2	69.7	1.2	71.9
Speed	1785	1769	1751	1725	1683	65.1	1700
Line amperes	6.74	7.76	9.32	11.4	14.27	34.96	13.1


ABB Motors and Mechanical Inc.

WINDING # 35WGG402


Typical performance - not guaranteed values.

1 HP 1 PH 60 HZ 1725 RPM 115 V 3538L

TORQUES (LB-FT) : PO=9.56 PU=5.55 LR=8.58 LRA=76.9

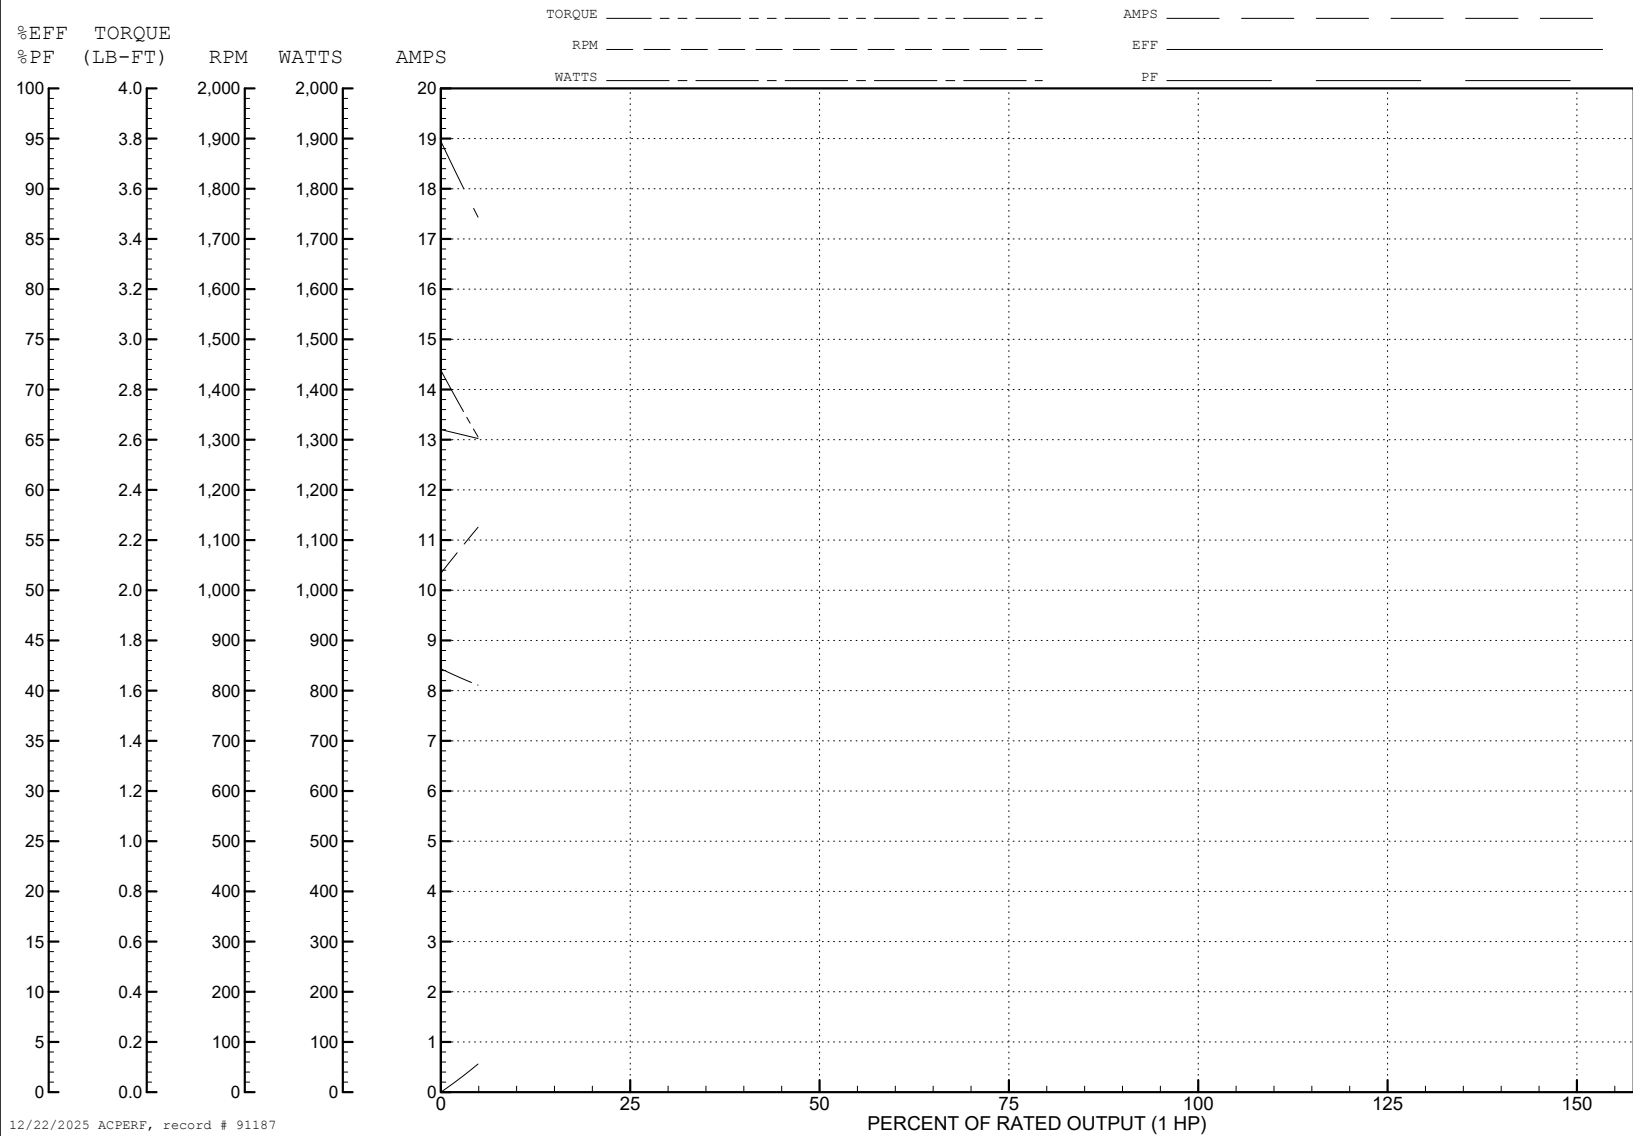

35LYE4628

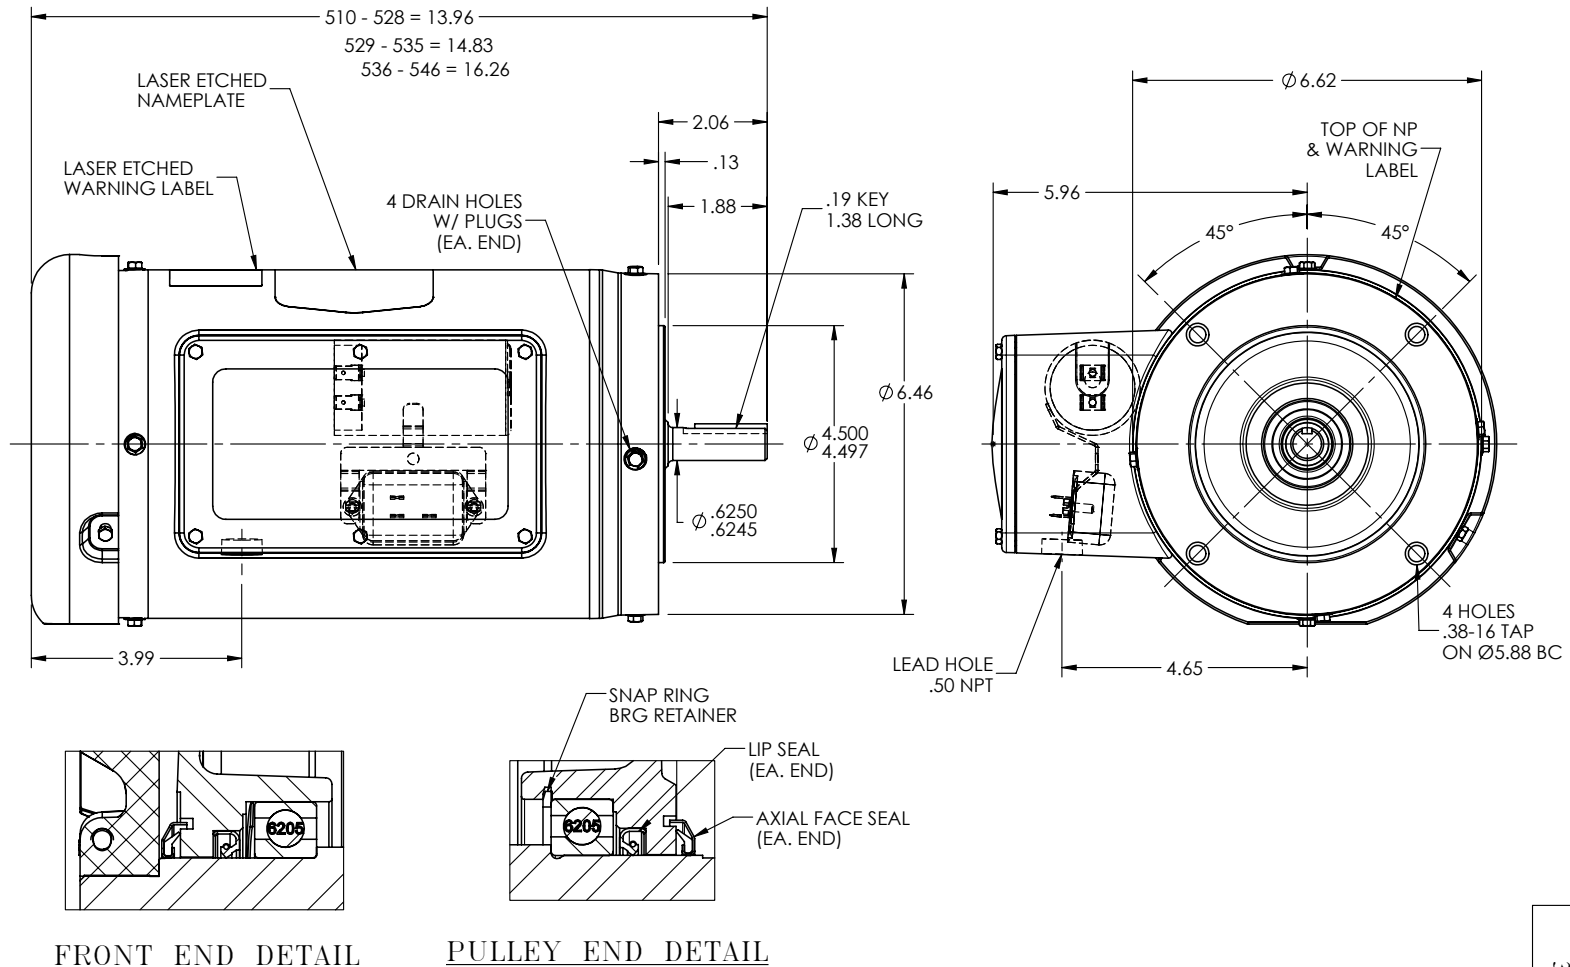

FRONT END DETAIL

PULLEY END DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: REMOVE FACE DRAINS & DRAIN FTG; ADD DRAIN PLUG

REV: A

VERSION: 01

REVISED: 09:14:42 01/26/2023

TDR: 000001202627

35LYE4628

MODEL NO. 35LYE4628

BY: ENSTEK0

REF: -

BALDOR

STD VER 56C TEFC 35L WD11/12

35LYE4628

