



Customer information packet

VFSWDM3651-E

3HP, 1760RPM, 3PH, 60HZ, 56C, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.400 A @ 230.0 V 4.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a
Insulation Class	H

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGS987
Layout	36LY-000-048
Eff. date	11-10-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	05-23-2019

Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3636M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	17.54 IN
Power Factor	76
Product Family	WD All SS Encapsulated
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1953N01									
CAT.NO.	VFSWDM3651-E								
SPEC.	36-0000-0049								
HP	3								
VOLTS	230/460								
AMPS	8.4/4.2								
R.P.M.	1760								
FRAME	56C		HZ	60		PH	3		
SER.F.	1.15	CODE	K	DES.	B	CLASS	H		
NEMA NOM. EFF.	89.5		P.F.	76					
RATING	40C AMB-CONT								
CC	010A		USABLE AT 208V				N/A		
DE	6207		ODE	6206					
ENCL	TEFC	SN							
	4:1 CT, 10:1 VT								

AC Induction Motor Performance Data

Record # 39149

Typical performance - not guaranteed values

Winding: 36WGS987-R001			Type: 3636M	Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		3	Full Load Torque		9.04 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		8.4/4.2	Breakdown Torque		34.81 LB-FT		
R.P.M.		1760	Pull-up Torque		18.62 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		21.9 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		34.1 A
Service Factor (S.F.)		1.15		No-load Current		2.25 A	
NEMA Nom. Eff.		89.5	Power Factor	76	Line-line Res. @ 25°C		3.58 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		62°C	
S.F. Amps				Temp. Rise @ S.F. Load		74°C	
				Locked-rotor Power Factor		41	
				Rotor inertia		0.335 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	36	57	69	76	80	83	78
Efficiency	82	88	89.6	89.8	89.2	88.3	89.3
Speed	1790	1781	1772	1762	1751	1738	1755
Line amperes	2.45	2.86	3.46	4.17	4.95	5.83	4.65


ABB Motors and Mechanical Inc.


WINDING # 36WGS987

Typical performance - not guaranteed values.


3 HP 3 PH 60 HZ 1760 RPM 460 V 3636M

TORQUES (LB-FT): PO=34.81 PU=18.62 LR=21.9 LRA=34.1

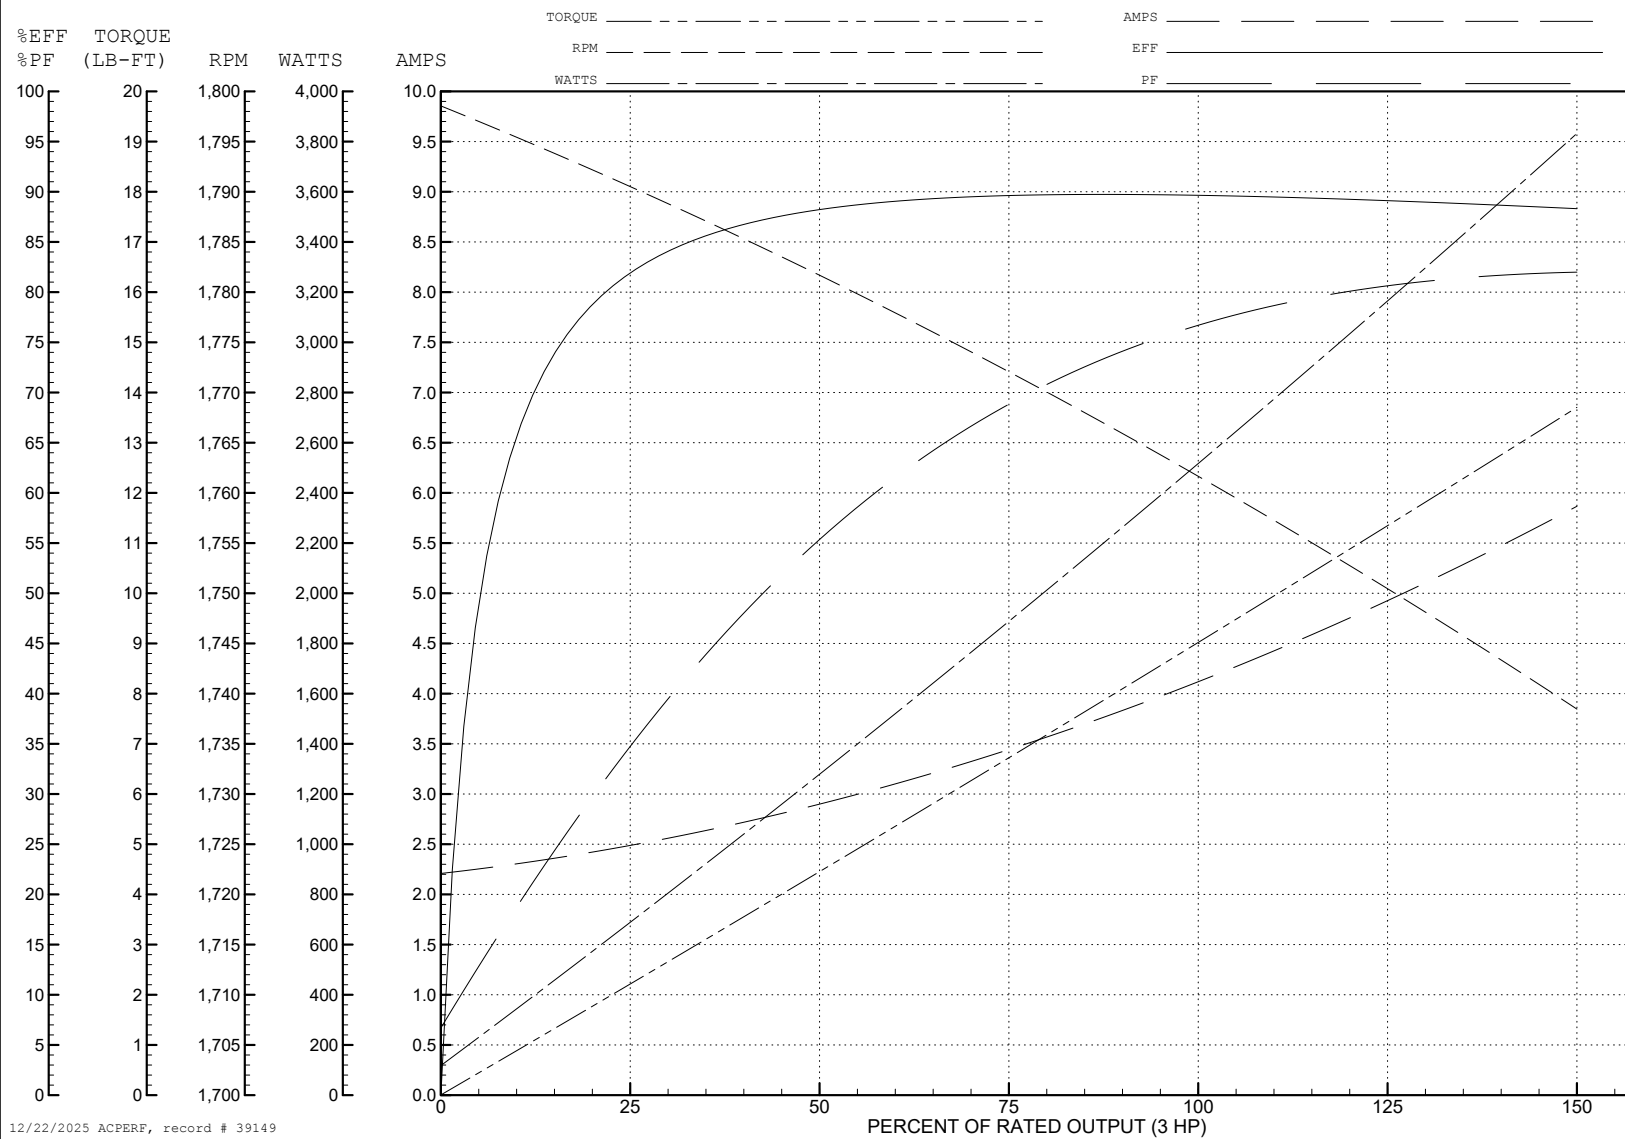

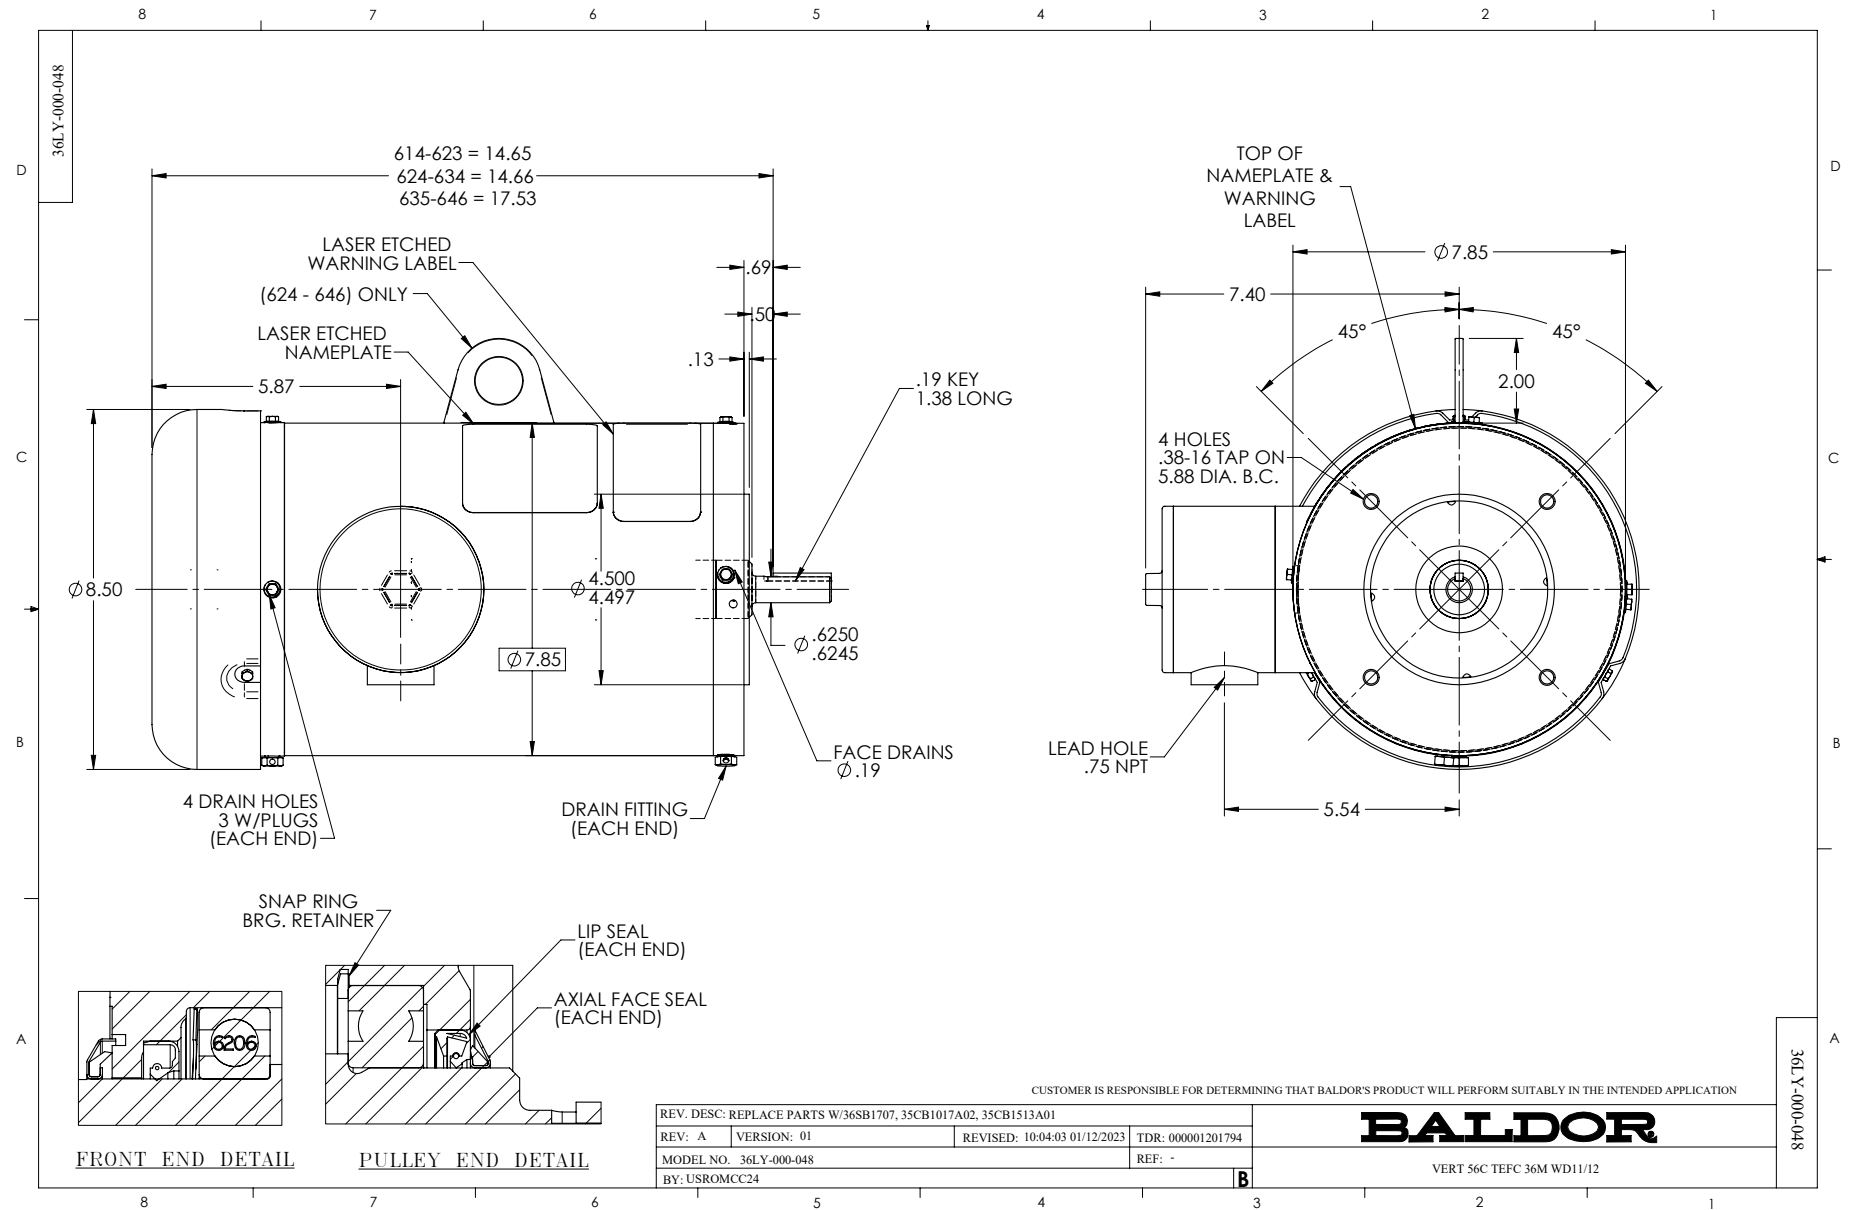

CD0005

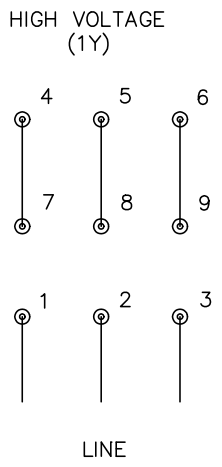

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005