



Customer information packet

VHECP4107T

25HP, 3520RPM, 3PH, 60HZ, 284HP, 0954M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	284HP
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	56.000 A @ 230.0 V 64.000 A @ 208.0 V 28.000 A @ 460.0 V
Design Code	A
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	AK
Type	AC
Mech. spec.	09G614
Base	
Status	PRD/A
Elec. spec.	09WGY357
Layout	09LYG614
Eff. date	04-01-2025
CD Diagram	CD0180
Poles	02
Leads	9#10
Proprietary	False
Created date	01-01-0001

Heater Indicator	No Heater
High Voltage Full Load Amps	28.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0950M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	25.72 IN
Power Factor	91
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	P-Base
Pulley Shaft Indicator	P-Base Groove & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1260									
CAT.NO.	VHECP4107T								
SPEC.	09G614Y357								
HP	25								
VOLTS	230/460								
AMP	56/28								
RPM	3530								
FRAME	284HP	HZ	60		PH	3			
SER.F.	1.15	CODE	J	DES	A	CL	F		
NEMA-NOM-EFF	92.4	PF	91						
RATING	40C AMB-CONT								
CC	010A								
DE	6311	ODE	6208						
ENCL	TEFC	SN							

AC Induction Motor Performance Data

Record # 1971

Typical performance - not guaranteed values

Winding: 09WGY357-R001			Type: 0950M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		25		Full Load Torque		37.2 LB-FT
Volts		230/460		Start Configuration		direct on line
Full Load Amps		56/28		Breakdown Torque		139 LB-FT
R.P.M.		3530		Pull-up Torque		67.2 LB-FT
Hz		60 Phase		Locked-rotor Torque		78.3 LB-FT
NEMA Design Code		A KVA Code		Starting Current		236 A
Service Factor (S.F.)		1.15		No-load Current		7.8 A
NEMA Nom. Eff.		92.4 Power Factor		Line-line Res. @ 25°C		0.286 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		64°C
S.F. Amps				Temp. Rise @ S.F. Load		78°C
				Locked-rotor Power Factor		27.3
				Rotor inertia		1.28 LB-FT2

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	82	89	91	92	92	92
Efficiency	89.9	93	93.5	93.2	92.6	91.7	92.8
Speed	3583	3566	3549	3531	3512	3492	3520
Line amperes	10.45	15.33	21.15	27.5	34.3	41.5	31.6


ABB Motors and Mechanical Inc.


WINDING # 09WGY357

Typical performance - not guaranteed values.

25 HP 3 PH 60 HZ 3530 RPM 460 V 0950M

TORQUES (LB-FT): PO=139 PU=67.2 LR=78.3 LRA=236

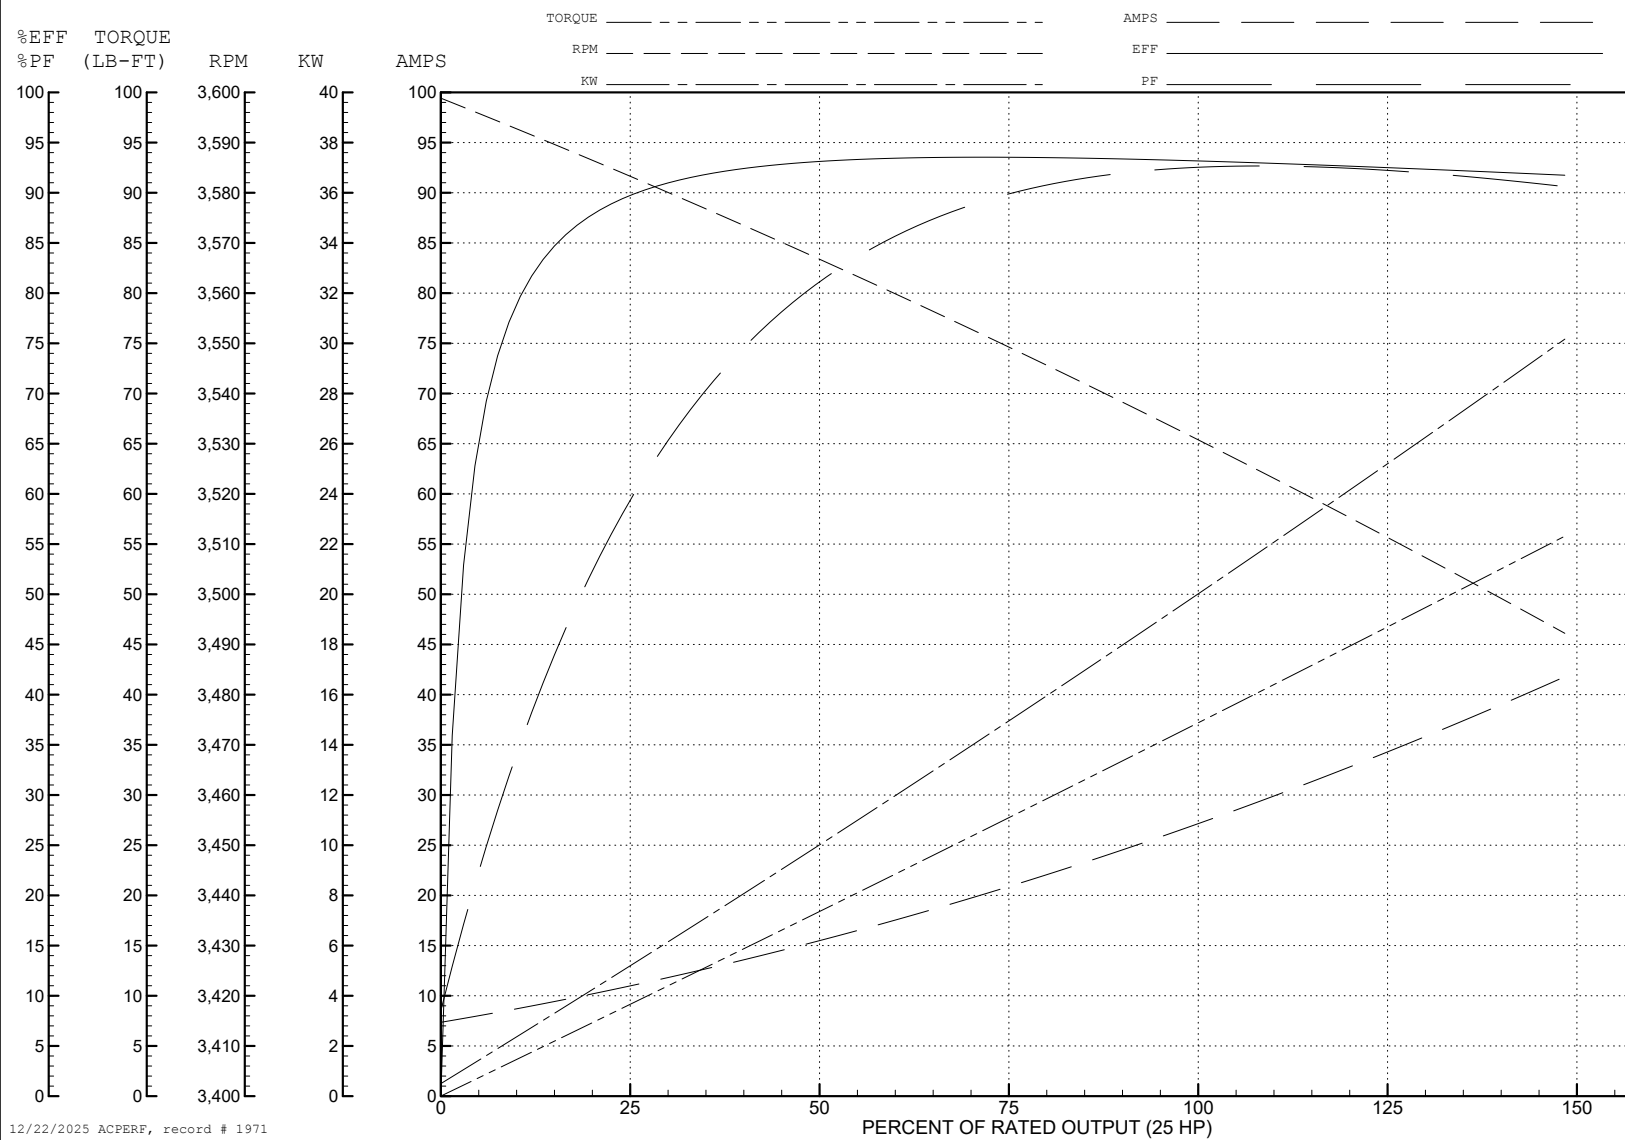

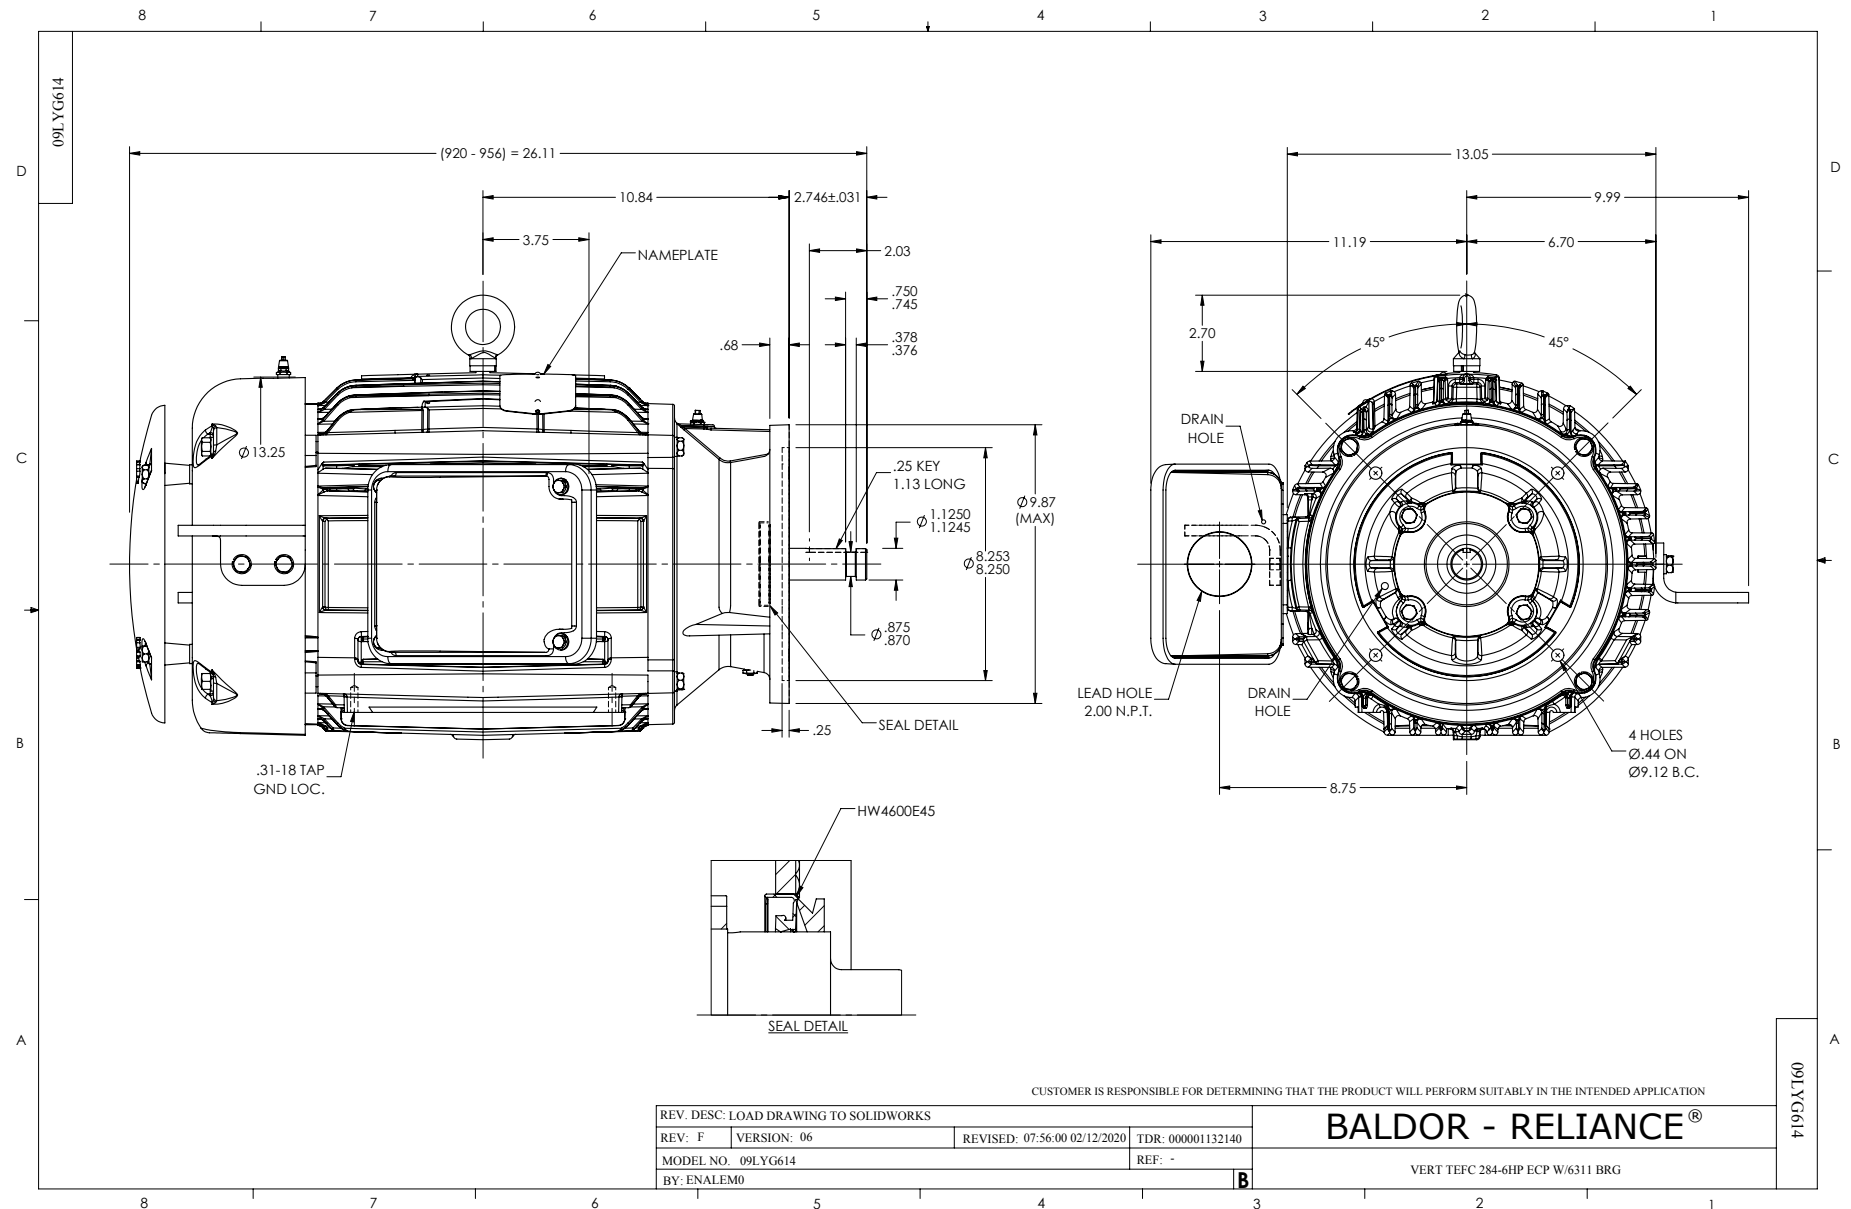

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1