



Customer information packet

VJPFPM2534T

30//25HP, 3510//2910RPM, 3PH, 60//50HZ, 284J

Class -

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	284JP
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 50 HZ 30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3000 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 380.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	76.000 A @ 208.0 V 70.000 A @ 230.0 V 70.000 A @ 190.0 V 35.000 A @ 460.0 V 35.000 A @ 380.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %

Part detail

Revision	U
Type	AC
Mech. spec.	39T043
Base	
Status	PRD/A
Elec. spec.	39WGX216
Layout	39LYT043
Eff. date	06-26-2024
CD Diagram	CD0104
Poles	02
Leads	12#12
Proprietary	False
Created date	09-17-2015

Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	35.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3936M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	29.23 IN
Power Factor	89
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	1.750 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	2910 rpm
	3510 rpm
Speed Code	Single Speed

Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Nameplate

NP3454L																
CAT.NO.	VJPFPM2534T				CUST P/N							I.P.	23			
SPEC.	39T043X216H2				SER.NO.							FRAME	284JP			
HZ	60	HP	30		RPM	3510		HZ	50		HP	25		RPM	2910	
VOLTS	230/460				CODE	G		VOLTS	190/380					CODE	F	
AMPS	70/35				DES	B		AMPS	70/35					DES	B	
EFF	91		SER.F.	1.15		PF	89		EFF	90.2		SER.F.	1.15		PF	89
RATING	40C AMB-CONT					DE BRG	6312					GREASE	POLYREX EM			
BLANK						ODE BRG	6208					MTR. WT.	278			
						CLASS	F			PH	3					
						ENCL	OPSB			CC	010A					
HTR-VOLTS			HTR-AMPS		HTR-WATTS											

AC Induction Motor Performance Data

Record # 52859

Typical performance - not guaranteed values

Winding: 39WGX216-R004			Type: 3936M		Enclosure: OPSB			
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		30//25		Full Load Torque		44.9 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		70/35		Breakdown Torque		156 LB-FT		
R.P.M.		3510//2910		Pull-up Torque		47.6 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		67.2 LB-FT	
NEMA Design Code		B		KVA Code	G	Starting Current		214 A
Service Factor (S.F.)		1.15		No-load Current		10.3 A		
NEMA Nom. Eff.		91	Power Factor		89	Line-line Res. @ 25°C		0.393 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		37°C
S.F. Amps						Temp. Rise @ S.F. Load		51°C
						Locked-rotor Power Factor		30
						Rotor inertia		0.92 LB-FT ²

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	60	80	87	89	90	90	90
Efficiency	89.4	92.2	92.3	91.4	90.2	88.5	90.7
Speed	3578	3556	3533	3508	3481	3450	3492
Line amperes	13.03	19	26.36	34.4	43.2	53.1	39.7


ABB Motors and Mechanical Inc.

WINDING # 39WGX216

Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 3508 RPM 460 V 3936M

TORQUES (LB-FT): PO=156 PU=47.6 LR=67.2 LRA=214

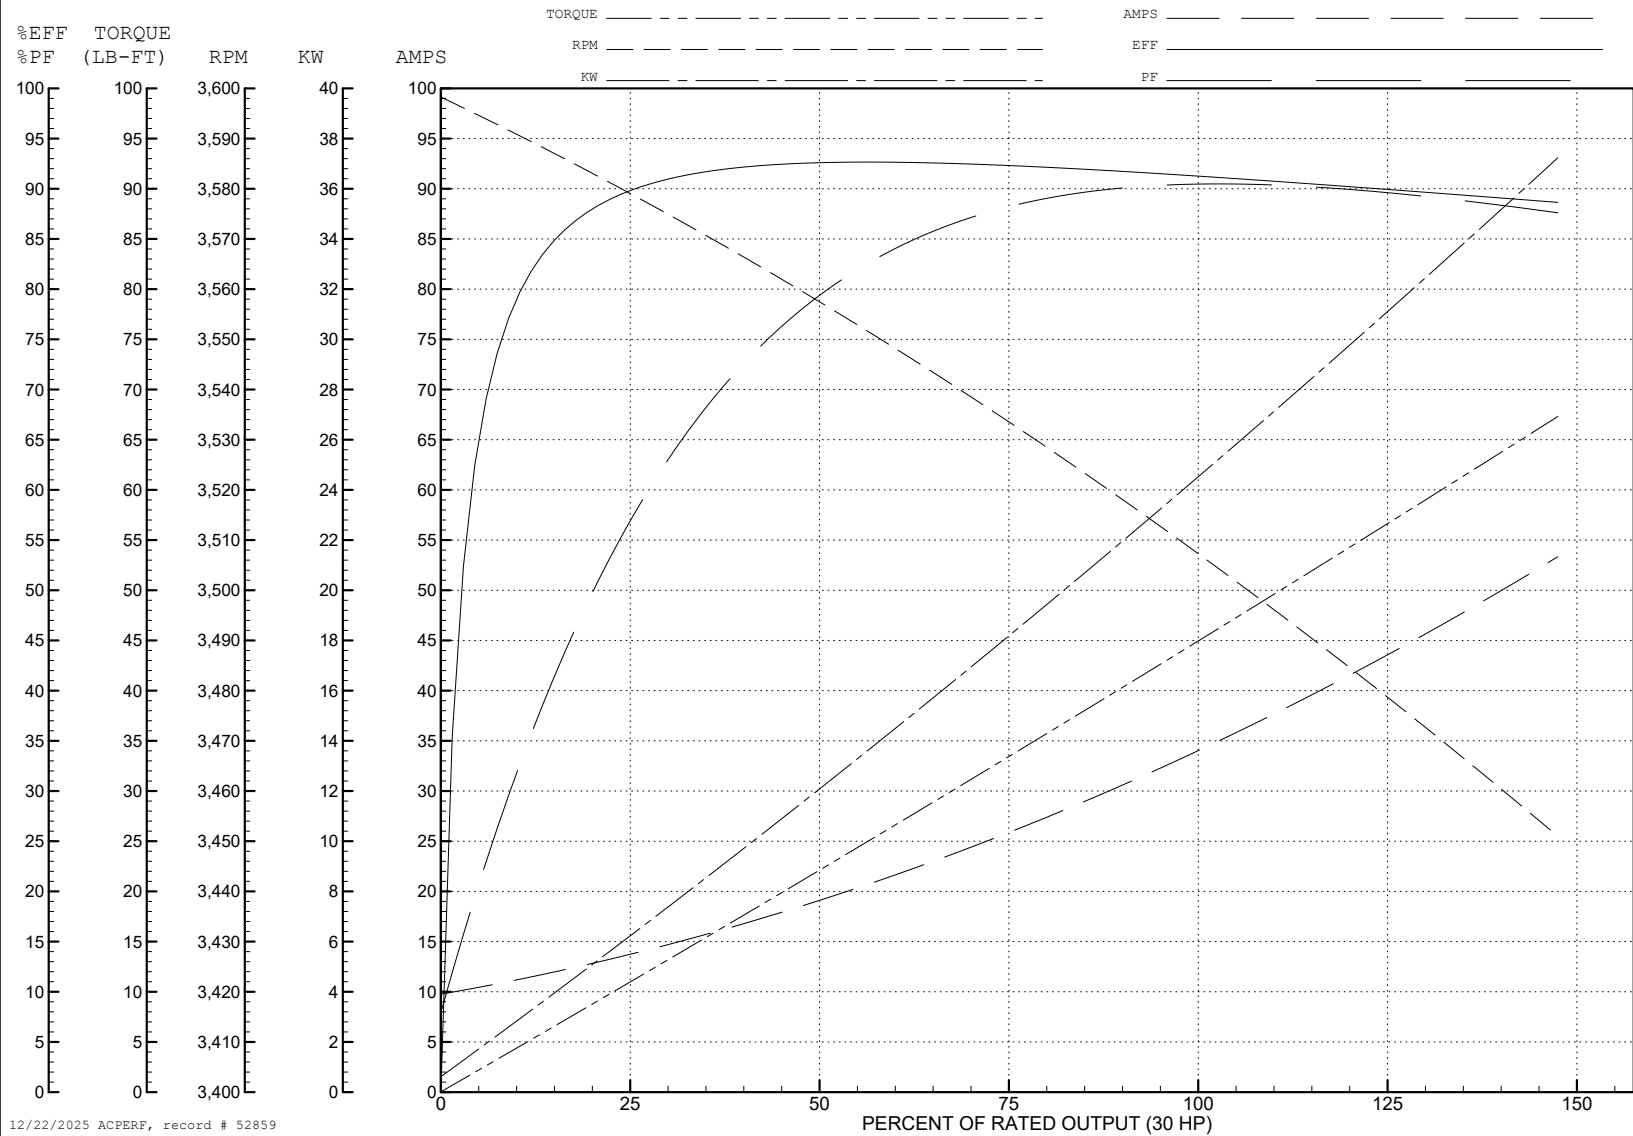

AC Induction Motor Performance Data

Record # 52860

Typical performance - not guaranteed values

Winding: 39WGX216-R004			Type: 3936M		Enclosure: OPSB			
Nameplate Data				380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		30//25		Full Load Torque		45.2 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		70/35		Breakdown Torque		149 LB-FT		
R.P.M.		3510//2910		Pull-up Torque		50.3 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		71 LB-FT	
NEMA Design Code		B		KVA Code	G	Starting Current		208 A
Service Factor (S.F.)		1.15		No-load Current		10.1 A		
NEMA Nom. Eff.		91	Power Factor		89	Line-line Res. @ 25°C		0.379 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		38°C
S.F. Amps						Temp. Rise @ S.F. Load		48°C
						Locked-rotor Power Factor		34.2
						Rotor inertia		0.92 LB-FT ²

Load Characteristics 380 V, 50 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	82	88	90	90	88	90
Efficiency	91.2	92.9	92.4	90.9	89.3	87.1	90
Speed	2979	2957	2934	2909	2882	2850	2893
Line amperes	12.8	19	26.5	34.8	43.9	54.4	40.3

ABB Motors and Mechanical Inc.

WINDING # 39WGX216

Typical performance - not guaranteed values.

25 HP 3 PH 50 HZ 2909 RPM 380 V 3936M

TORQUES (LB-FT): PO=149 PU=50.3 LR=71 LRA=208

