



Customer information packet

VLECP4103T

25HP, 1775RPM, 3PH, 60HZ, 286LP, 1054M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	286LP
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	0.8
Current @ Voltage	64.000 A @ 208.0 V 62.000 A @ 230.0 V 31.000 A @ 460.0 V
Design Code	A
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	S
Type	AC
Mech. spec.	10M69
Base	
Status	PRD/A
Elec. spec.	10WGZ651
Layout	10LYM069
Eff. date	11-03-2025
CD Diagram	CD0180
Poles	04
Leads	9#10
Proprietary	False
Created date	10-20-2017

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	31.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1054M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	32.44 IN
Power Factor	81
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Thrust
Pulley Face Code	P-Base
Pulley Shaft Indicator	P-Base Groove & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.750 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	NONE (OLD)

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3241

CAT.NO.	VLECP4103T		P/N				ENCLOSURE	TEFC				
SPEC.	10M069Z651G1	CC	010A	FRAME	286LP		S/N					
HP	25		CLASS	F	HZ	60	DES	A				
RPM	1775		RPM MAX	2700		PH	3	KVA-CODE	J			
VOLT	230/460		MOTOR WEIGHT			532						
AMP	62/31		SER.F.	1.15	PF	81	ODE BRG	6309	DE BRG	QJ213		
RATING	40C AMB-CONT		NEMA-NOM-EFF			93.6	GREASE	POLYREX EM				
					INV.TYPE		PWM					
TEMP CODE	T3C	INVERTER-TEMP-CODE		180								
TEMP =	160	C HP FR	60	C HP TO	90							
CT HZ FROM	0.8	CT HZ TO		60								
HTR-VOLTS		HTR-AMPS		HTR-WATTS		MAX. SPACE HEATER TEMP.			VT HZ FROM	O	VT HZ TO	60

AC Induction Motor Performance Data

Record # 67465

Typical performance - not guaranteed values

Winding: 10WGZ651-R006			Type: 1054M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		25	Full Load Torque		74.02 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		62/31	Breakdown Torque		262 LB-FT		
R.P.M.		1775	Pull-up Torque		118 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		142 LB-FT	
NEMA Design Code		A	KVA Code		J	Starting Current	223 A
Service Factor (S.F.)		1.15	No-load Current		13.6 A		
NEMA Nom. Eff.		93.6	Power Factor		81	Line-line Res. @ 25°C	0.2345 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		51°C
S.F. Amps			Temp. Rise @ S.F. Load		61°C		
			Locked-rotor Power Factor		30.6		

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	65	76	81	84	85	83
Efficiency	88.3	92.8	93.9	94	93.7	93.1	93.8
Speed	1794.1	1789.3	1783.5	1777.8	1770.8	1763.8	1774
Line amperes	15.3	19.3	24.6	30.6	37.2	44.5	34.6


ABB Motors and Mechanical Inc.


WINDING # 10WGZ651

Typical performance - not guaranteed values.

25 HP 3 PH 60 HZ 1775 RPM 460 V 1054M

TORQUES (LB-FT): PO=262 PU=118 LR=142 LRA=223

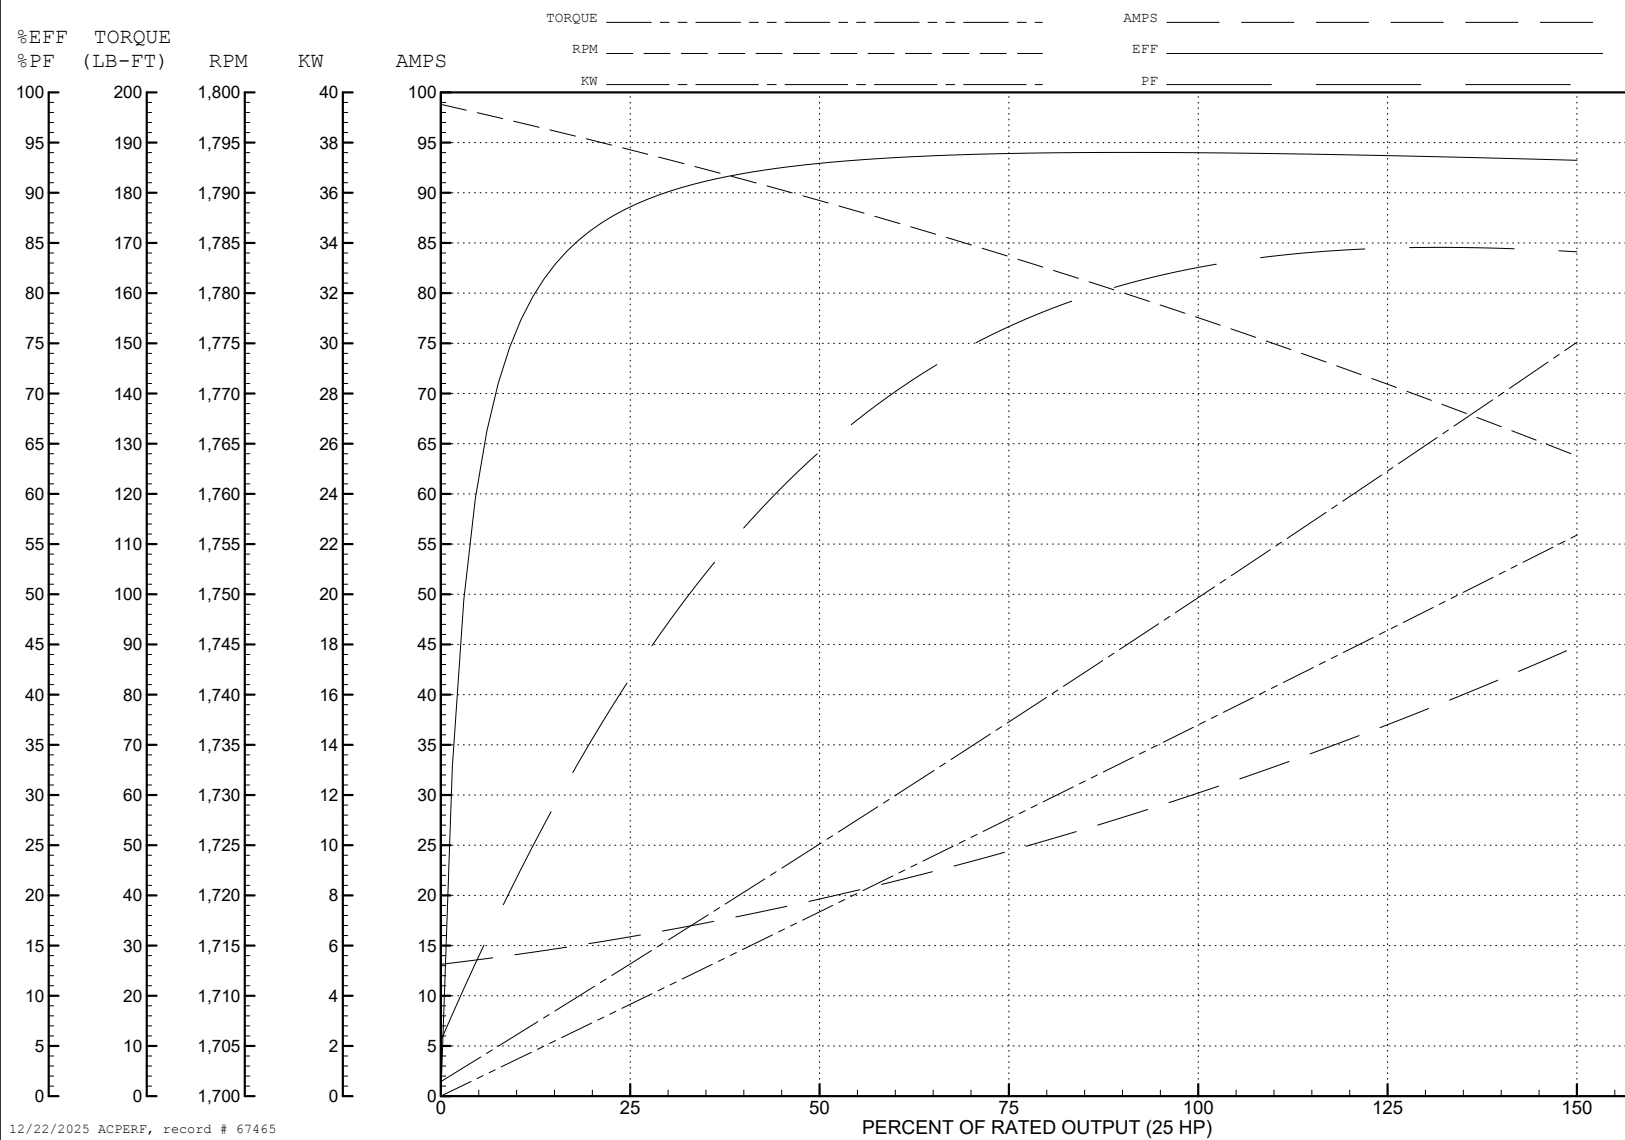

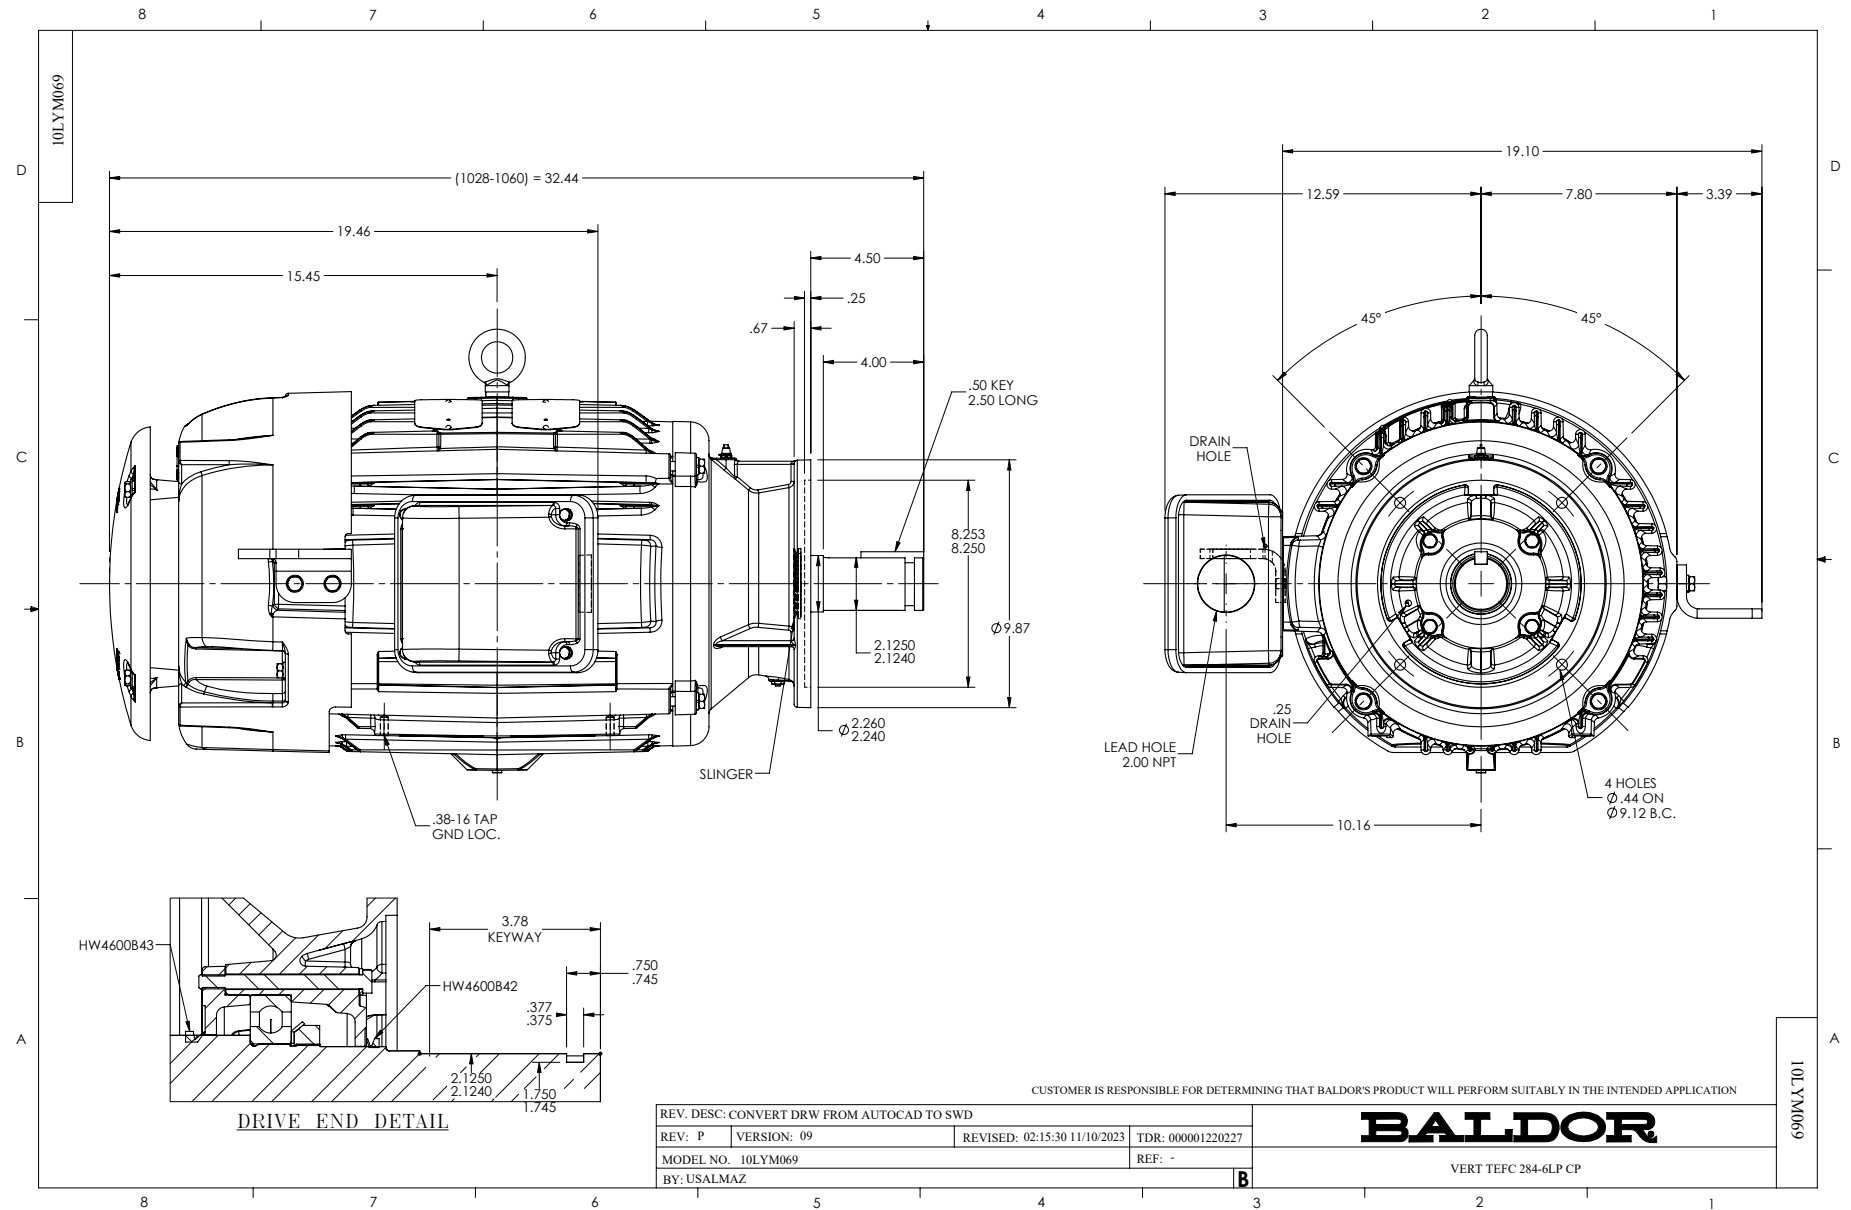

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1