

Specifications

Enclosure	TEFC
Frame	182LP
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	3.600 A @ 460.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C

Part detail

Revision	J
Type	AC
Mech. spec.	06J487
Base	
Status	PRD/A
Elec. spec.	06WGX711
Layout	06LYJ487
Eff. date	08-15-2025
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	03-25-2019

Heater Indicator	No Heater
High Voltage Full Load Amps	3.6 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP56
KVA Code	J
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0624M
Mounting Arrangement	W6
Number of Poles	2
Overall Length	22.68 IN
Power Factor	93
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	P-Base
Pulley Shaft Indicator	P-Base Groove & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4328									
CAT.NO.	VLECP83660T-4								
SPEC.	06J487X711G1								
HP	3 TE				IP	56			
VOLTS	460								
AMPS	3.6								
R.P.M.	3450								
FRAME	182LP		HZ		60		PH	3	
SER.F.	1.15	CODE	J	DES.	B	CLASS		F	
RATING	40C AMB-CONT								
SN									
DE	6307		ODE		7305				
NEMA NOM. EFF.	86.5		P.F.		93				
GUAR. MIN. EFF.	84		CC		010A				
T. CODE	T3C		TEMP=		160				

NP3186

SPEC.	06J487X711G1				
ABMA DE BRG	35BC03X30X				
ABMA ODE BRG	25BC03X30X				
GREASE	POLYREX EM				
MOTOR WEIGHT	95	ROTOR BARS	28	STATOR BARS	36
MAX. R.P.M.	5400	MAX. KVAR			
INV.TYPE	PWM				
T=	160				
CHP	60	TO	90		
CT	6	TO	60		
VT	3	TO	60		
HTR-VOLTS	N/A	HTR-AMPS	N/A		
HTR-WATTS	N/A	MAX. SPACE HEATER TEMP.			N/A

AC Induction Motor Performance Data

Record # 74732

Typical performance - not guaranteed values

Winding: 06WGX711-R007				Type: 0624M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		3		Full Load Torque		4.76 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		3.6		Breakdown Torque		18.9 LB-FT	
R.P.M.		3450		Pull-up Torque		7.56 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		B		KVA Code		J	
Service Factor (S.F.)		1.15		No-load Current		26.6 A	
NEMA Nom. Eff.		86.5		Power Factor		93	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	
S.F. Amps						Temp. Rise @ S.F. Load	
						Locked-rotor Power Factor	
						Rotor inertia	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	70	86	91	93	94	94	94
Efficiency	83.7	87.5	87.9	87.3	85.6	83.8	86.3
Speed	3561	3528	3490	3451	3409	3360	3426
Line amperes	1.39	2.02	2.78	3.62	4.5	5.5	4.15


ABB Motors and Mechanical Inc.


WINDING # 06WGX711

3 HP 3 PH 60 HZ 3450 RPM 460 V 0624M




Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=18.9 PU=7.56 LR=11.4 LRA=26.6

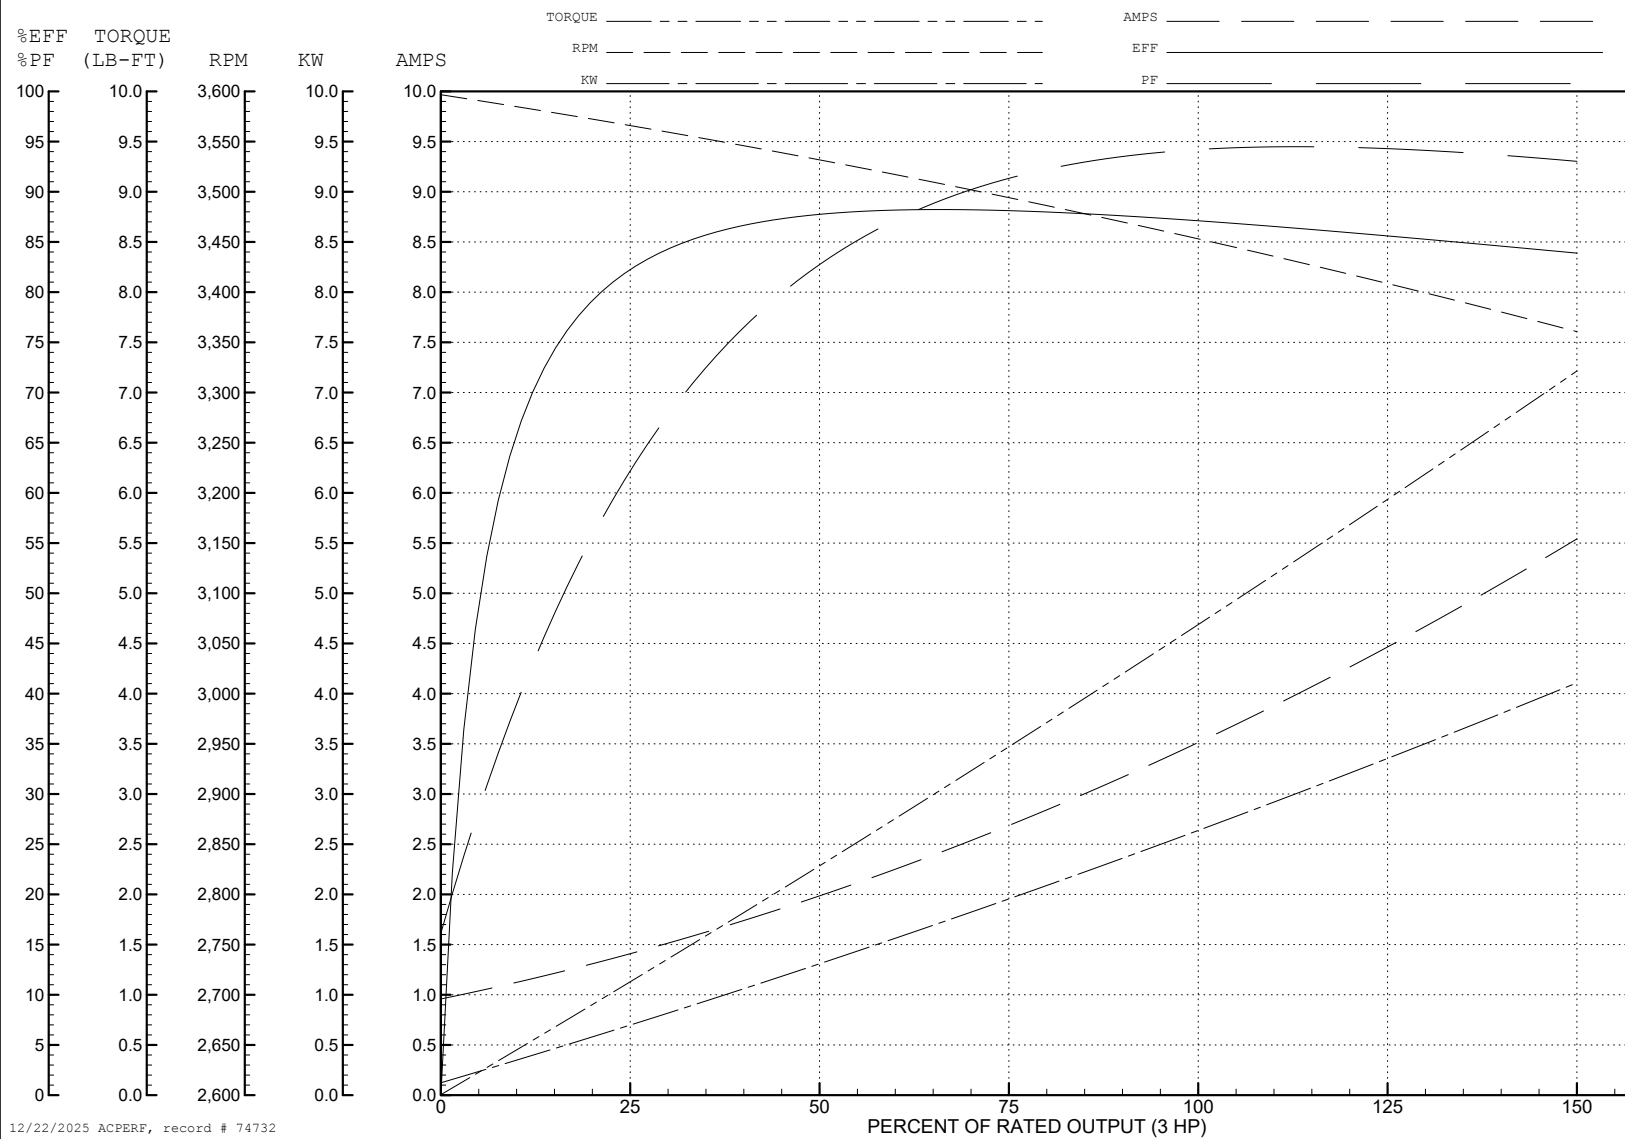

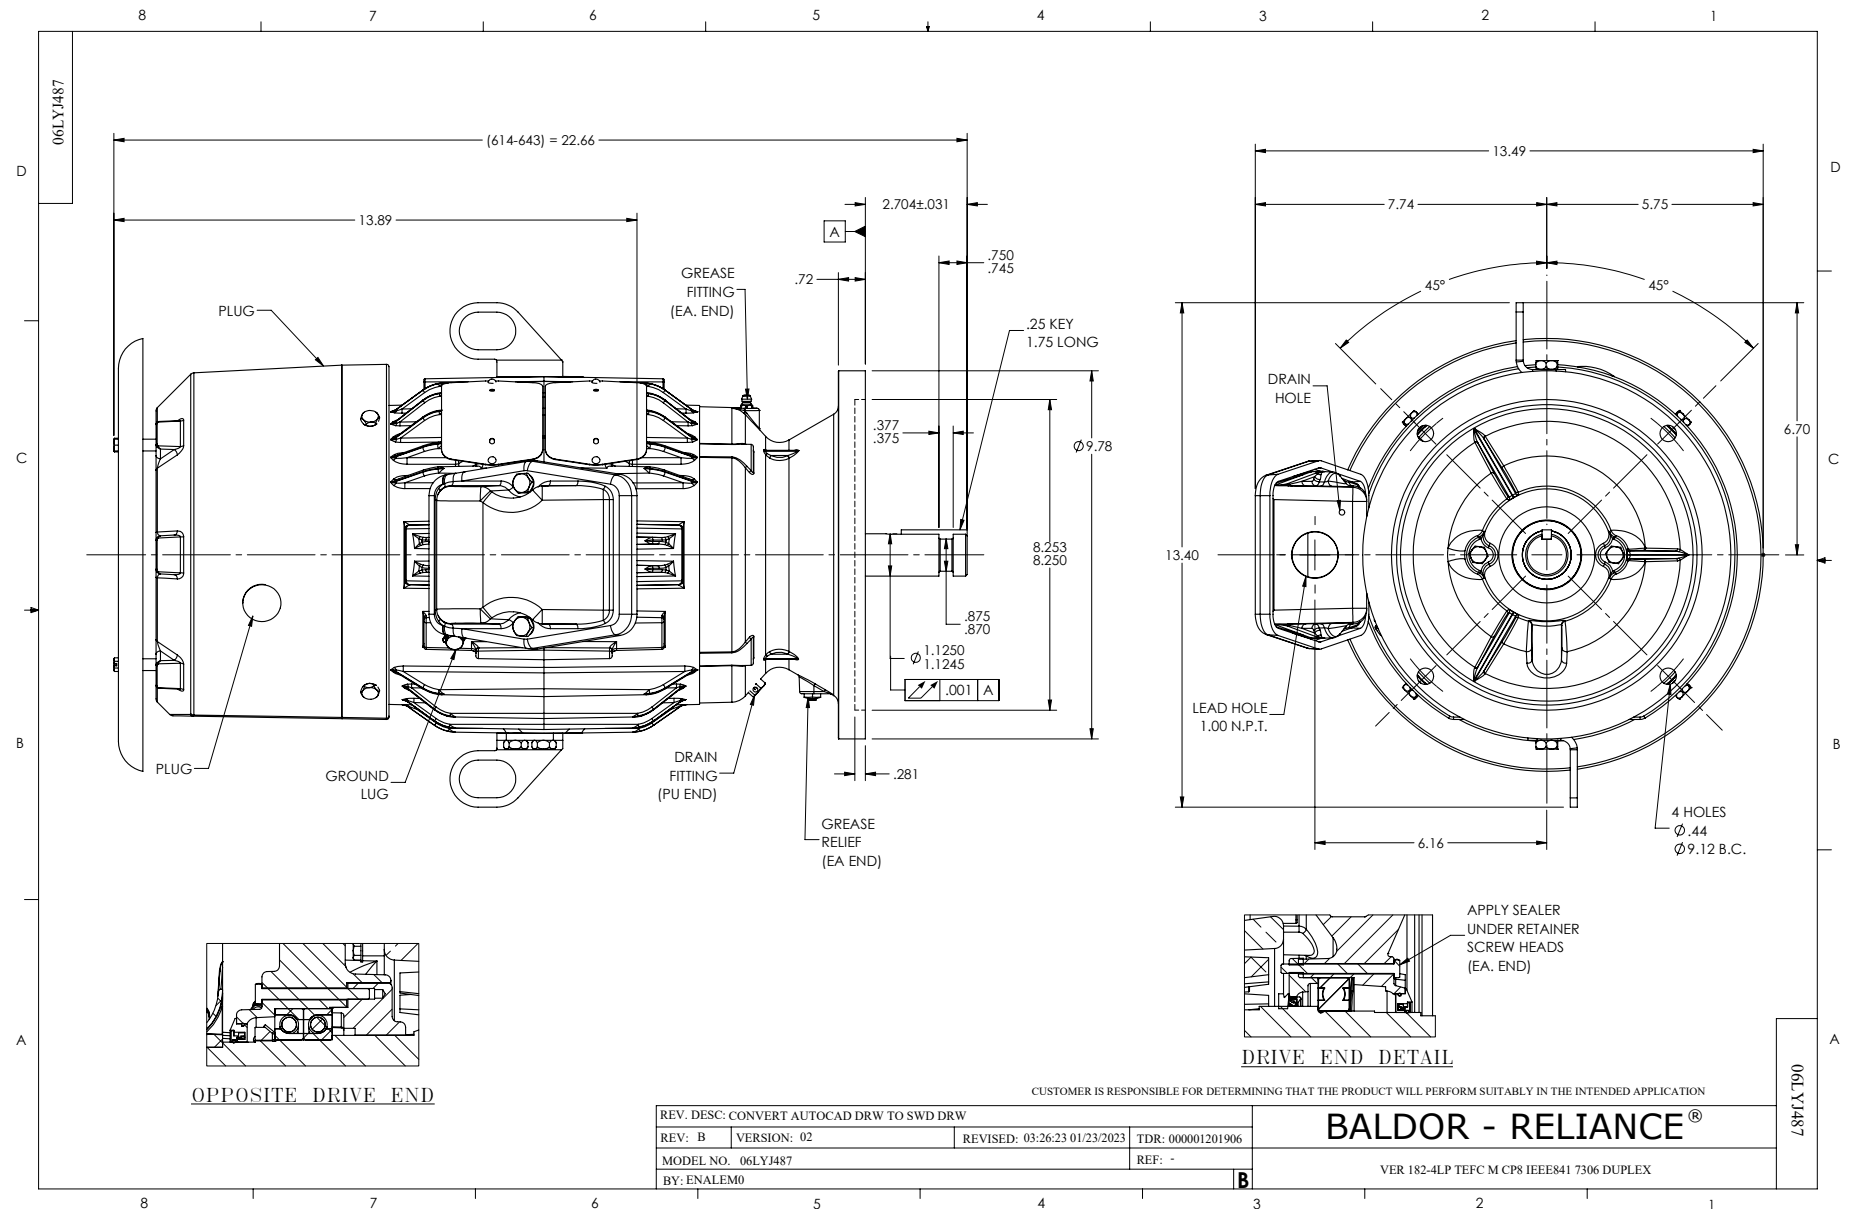

CD0006

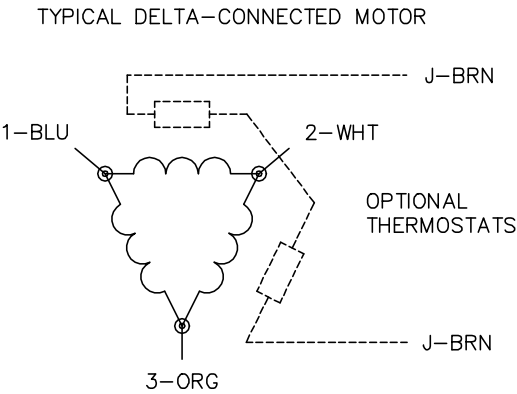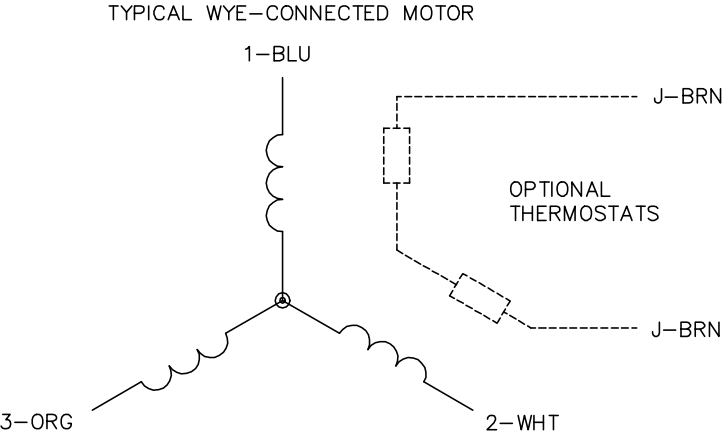

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1