



Customer information packet

VM3541-5

.75HP, 3450RPM, 3PH, 60HZ, 56C, 3413M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.960 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.0 a
Insulation Class	B
Inverter Code	Not Inverter

Part detail

Revision	AB
Type	AC
Mech. spec.	34A063
Base	
Status	PRD/A
Elec. spec.	34WG0492
Layout	34LYA063
Eff. date	02-10-2025
CD Diagram	CD0006
Poles	02
Leads	3#18
Proprietary	False
Created date	01-01-0001

KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	11.35 IN
Power Factor	73
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L										
CAT.NO.	VM3541-5									
SPEC.	34A63-492									
HP	.75									
VOLTS	575									
AMP	.96									
RPM	3450									
FRAME	56C		HZ	60		PH	3			
SER.F.	1.25	CODE	K	DES	B	CLASS	B			
NEMA-NOM-EFF	74	PF	73							
RATING	40C AMB-CONT									
CC										
DE	6203		ODE	6203						
ENCL	TEFC	SN								
	SFA 1.2									

AC Induction Motor Performance Data

Record # 6585

Typical performance - not guaranteed values

Winding: 34WG0492-R001			Type: 3413M		Enclosure: TEFC	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		.75		Full Load Torque		1.2 LB-FT
Volts		575		Start Configuration		direct on line
Full Load Amps		0.96		Breakdown Torque		4.8 LB-FT
R.P.M.		3450		Pull-up Torque		3.5 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		3.9 LB-FT
NEMA Design Code		B		KVA Code	K	
Service Factor (S.F.)		1.25		Starting Current		6.1 A
NEMA Nom. Eff.		74		Power Factor	73	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load
S.F. Amps		1.2		Temp. Rise @ S.F. Load		84°C

Load Characteristics 575 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	58	67	78	82	84	0
Efficiency	57.7	70.6	73.6	75.1	74.7	74	0
Speed	3553	3518	3481	3440	3395	3344	0
Line amperes	0.76	0.82	0.9	1.06	1.2	1.3	1.2


ABB Motors and Mechanical Inc.

WINDING # 34WG0492



Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 3450 RPM 575 V 3413M

TORQUES (LB-FT): PO=4.8 PU=3.5 LR=3.9 LRA=6.1

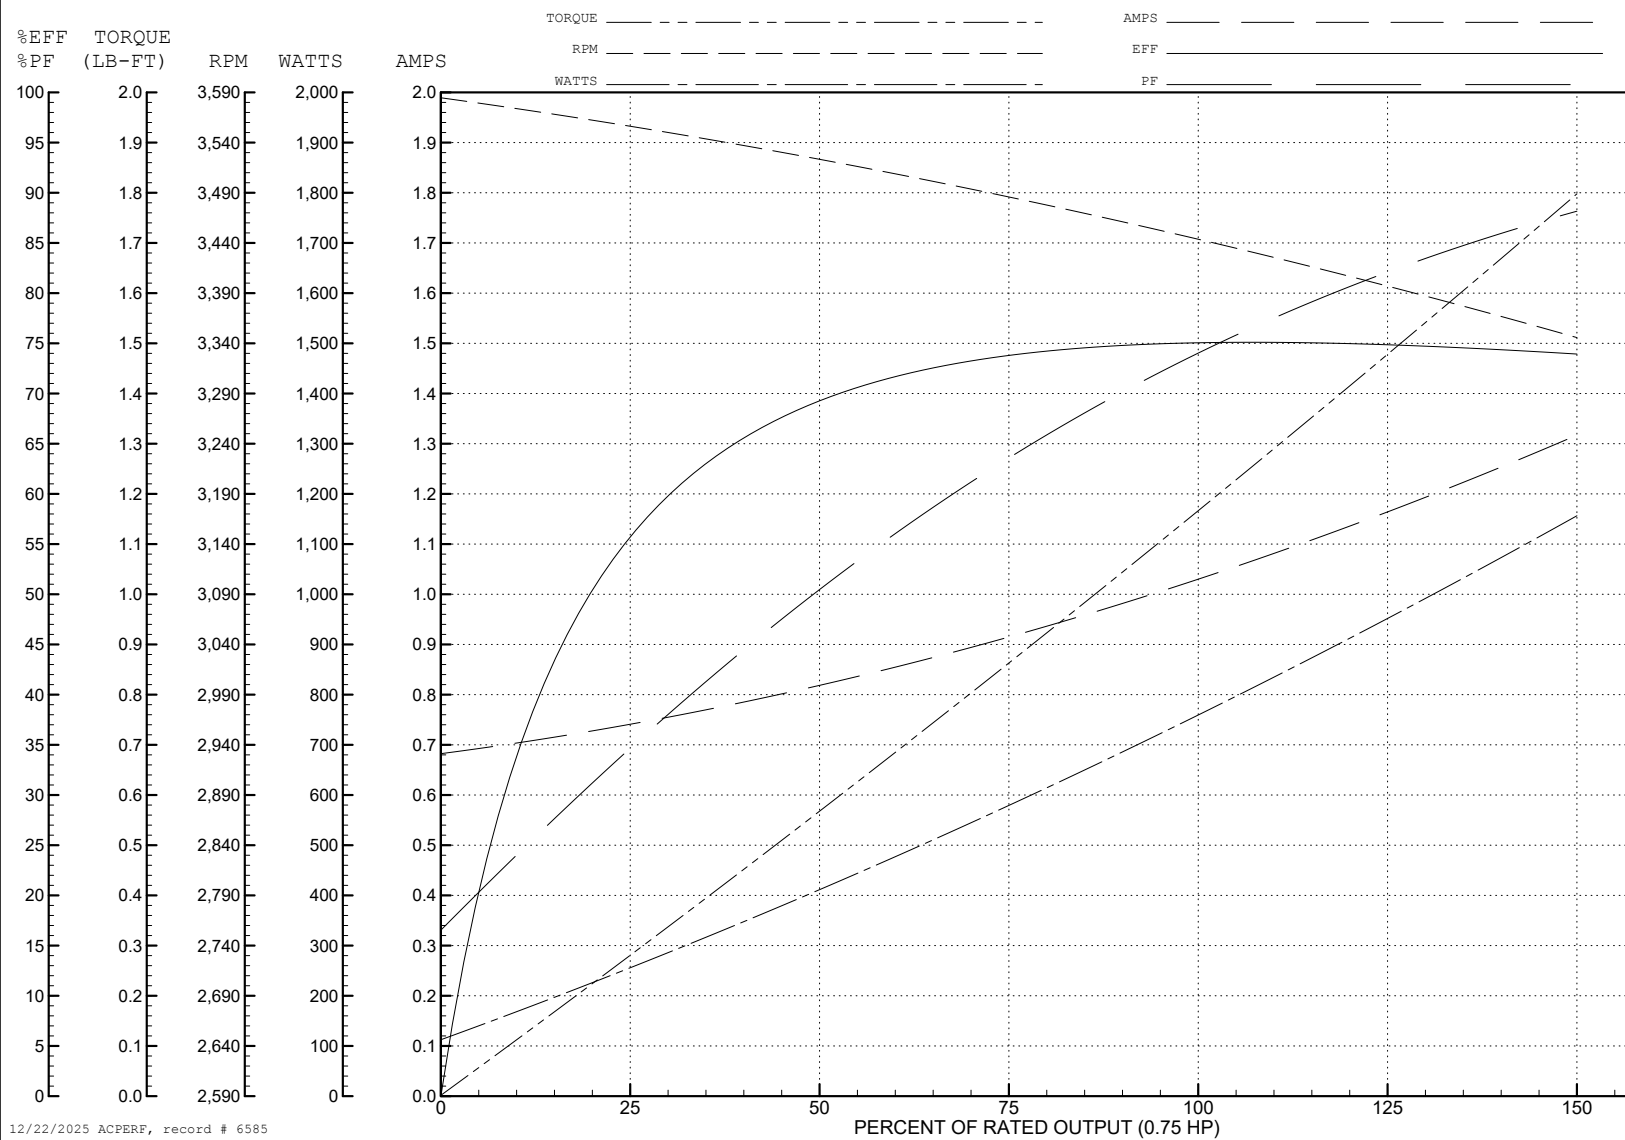

34LYA063

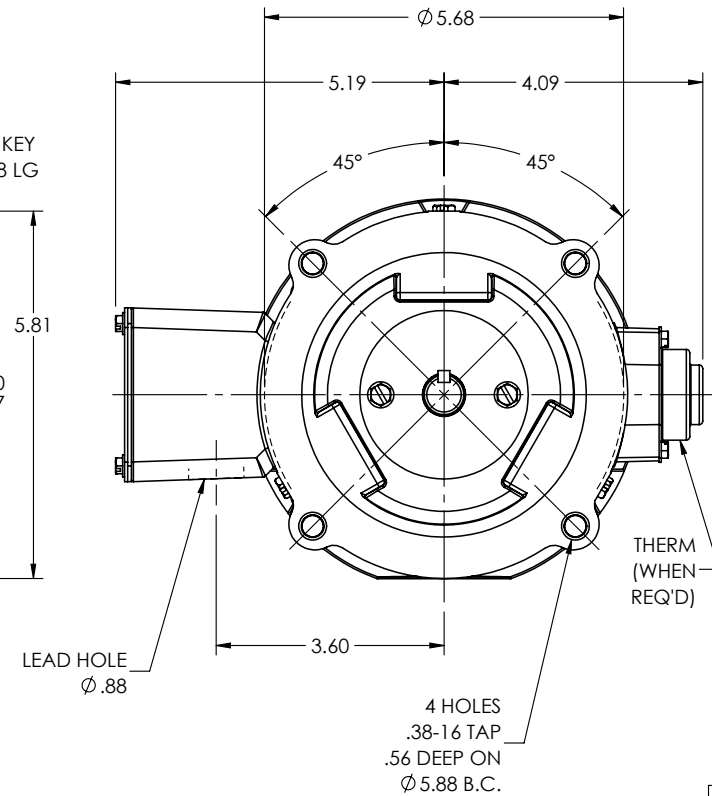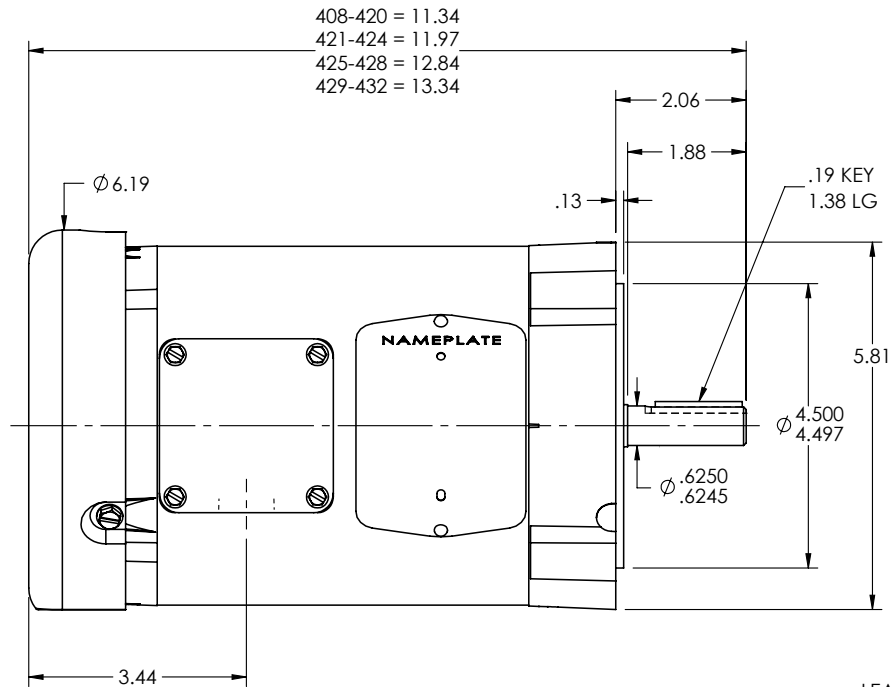

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: P

VERSION: 05

REVISED: 08:51:08 10/31/2024

TDR: 000001243684

34LYA063

MODEL NO. 34LYA063

REF: -

BY: ENJEFD0

BALDOR - RELIANCE®

STD VERT 34M NEMA 56C TEFC

34LYA063

