



Customer information packet

VPECP4114T

52M 2P TEFC VER 326VP CP 32-6 DRIPCOVER

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	326VP
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	56.000 A @ 460.0 V 122.000 A @ 208.0 V 112.000 A @ 230.0 V
Design Code	A
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part detail

Revision	G
Type	AC
Mech. spec.	12K58
Base	
Status	PRD/A
Elec. spec.	12WGY291
Layout	12LYK058
Eff. date	12-09-2025
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	05-29-2018

Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	56.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1252M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	34.71 IN
Power Factor	90
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Thrust
Pulley Shaft Indicator	P-Base Groove & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3540 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3241

CAT.NO.	VPECP4114T			P/N			ENCLOSURE			TEFC			
SPEC.	12K058Y291G2			CC	010A	FRAME	326VP		S/N				
HP	50				CLASS	F	HZ	60	DES	A			
RPM	3540				RPM MAX	5400		PH	3	KVA-CODE	H		
VOLT	230/460				MOTOR WEIGHT			587					
AMP	112/56				SER.F.	1.15	PF	90	ODE BRG	6311	DE BRG	7311	
RATING	40C AMB-CONT				NEMA-NOM-EFF			93	GREASE	POLYREX EM			
							INV.TYPE		PWM				
TEMP CODE	T3	INVERTER-TEMP-CODE			200								
TEMP =	200	C HP FR	60	C HP TO		90							
CT HZ FROM	6	CT HZ TO		60									
HTR-VOLTS	HTR-AMPS				HTR-WATTS				MAX. SPACE HEATER TEMP.				
									VT HZ FROM		3	VT HZ TO	60

AC Induction Motor Performance Data

Record # 70997

Typical performance - not guaranteed values

Winding: 12WGY291-R044			Type: 1252M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		50		Full Load Torque		74.4 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		112/56		Breakdown Torque		292 LB-FT	
R.P.M.		3540		Pull-up Torque		112 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		139 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		408 A
Service Factor (S.F.)		1.15		No-load Current		14.9 A	
NEMA Nom. Eff.		93	Power Factor	90	Line-line Res. @ 25°C		0.11257 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		77°C	
S.F. Amps				Temp. Rise @ S.F. Load		95°C	
				Locked-rotor Power Factor		20.9	
				Rotor inertia		4.07 lb-ft²	

Load Characteristics 460 V, 60 Hz, 50 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	66	82	88	90	91	90	91
Efficiency	91.1	93.8	94.2	93.9	93.2	92.3	93.5
Speed	3584.1	3571.8	3558.2	3544.1	3528.2	3511.2	3535
Line amperes	20.4	30.8	42.9	55.8	69.5	84.6	64


ABB Motors and Mechanical Inc.


WINDING # 12WGY291

Typical performance - not guaranteed values.

50 HP 3 PH 60 HZ 3540 RPM 460 V 1252M

TORQUES (LB-FT): PO=292 PU=112 LR=139 LRA=408

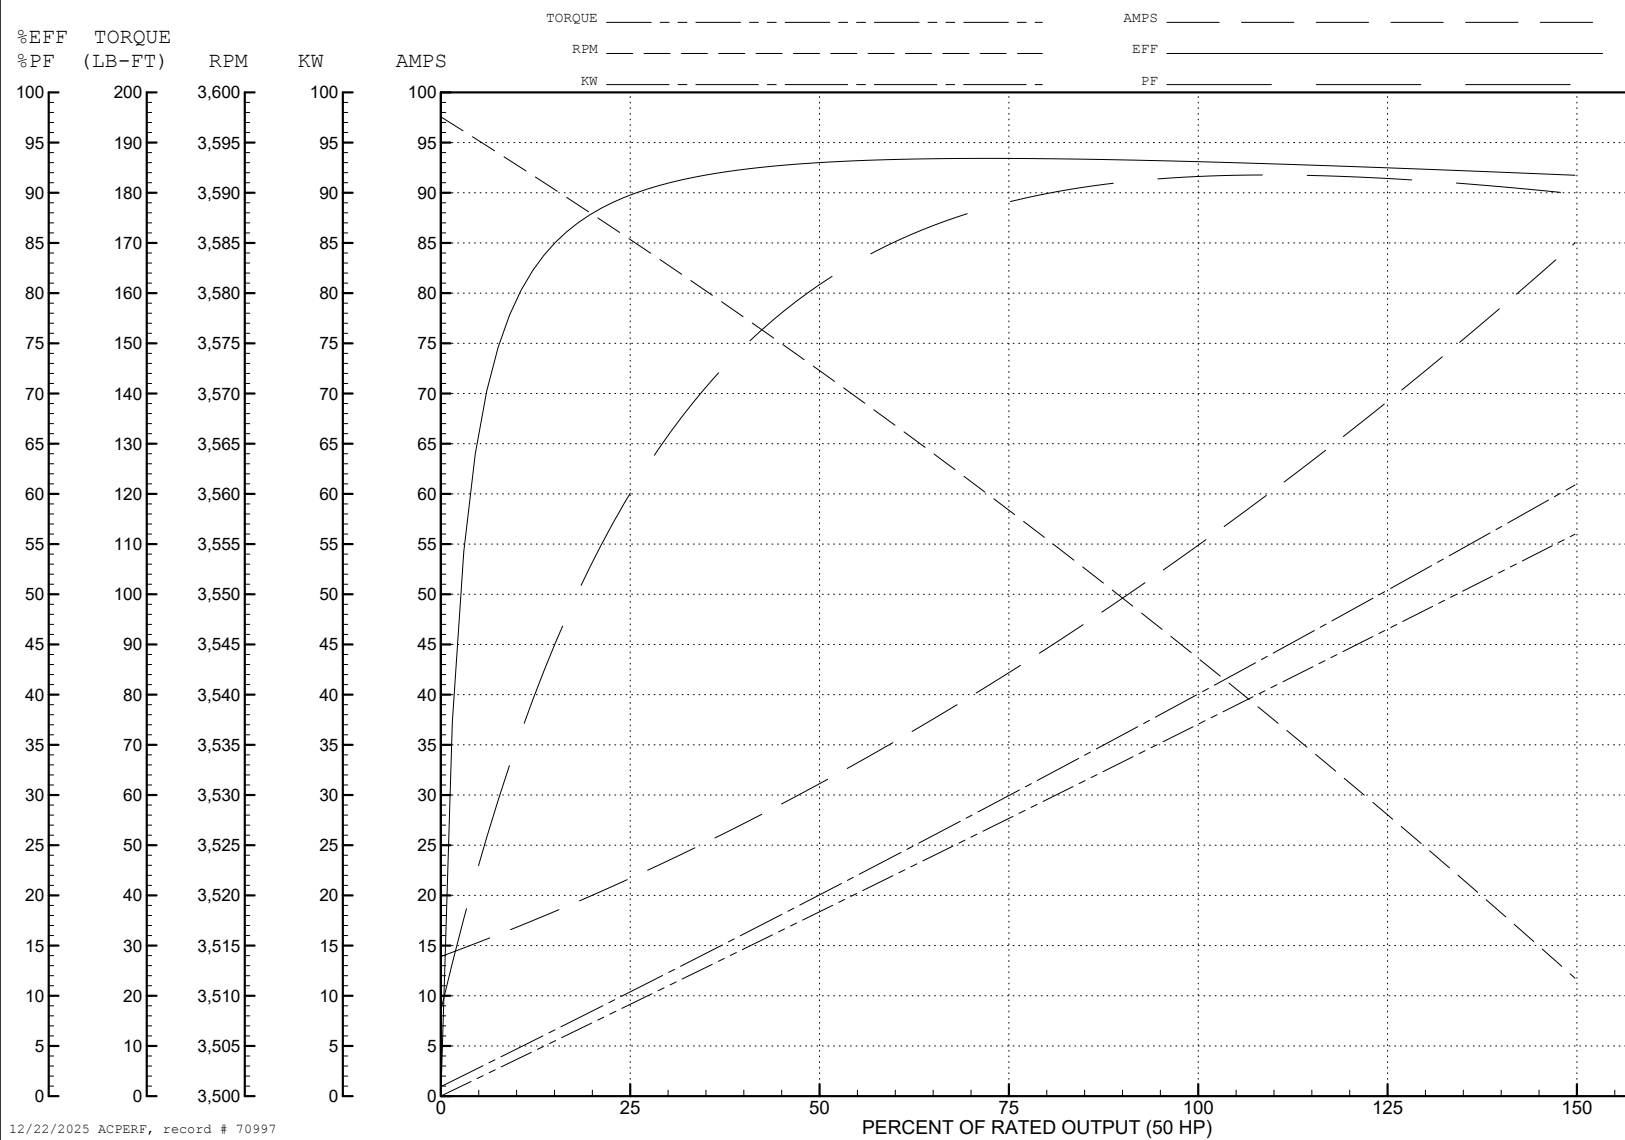

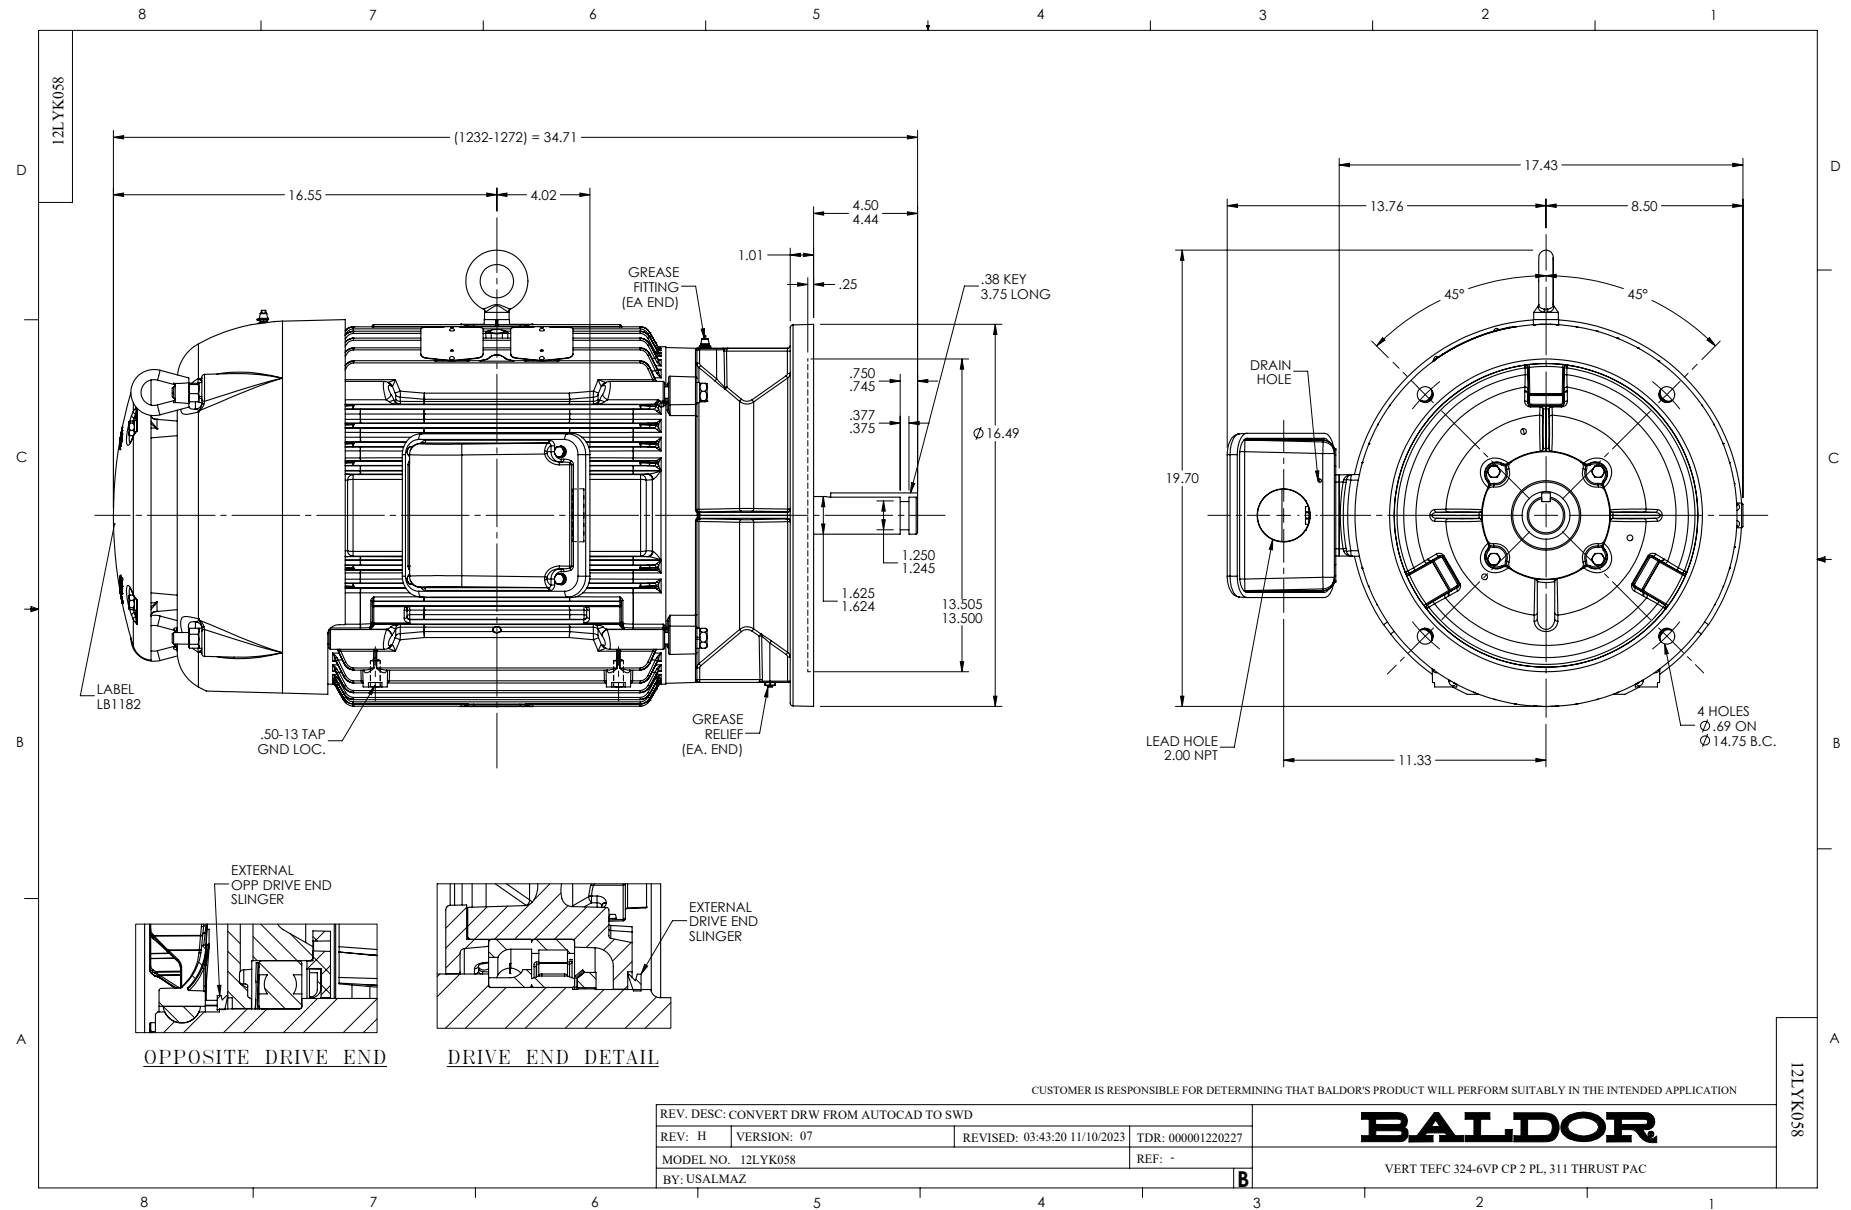

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1