



Customer information packet

VSPM3312T

10HP, 3500RPM, 3PH, 60HZ, 213TC, 3736M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	ODP
Frame	213TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA_PREMIUM WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	23.000 A @ 230.0 V 24.000 A @ 208.0 V 11.500 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	C
Type	AC
Mech. spec.	37T654
Base	
Status	PRD/A
Elec. spec.	37WGT238
Layout	37LYT654
Eff. date	11-19-2025
CD Diagram	CD0005
Poles	02
Leads	9#14
Proprietary	False
Created date	11-29-2023

High Voltage Full Load Amps	11.5 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3736M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.19 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4423A01A01L													
CAT #	VSPM3312T					WGT	130	LBS					
SPEC	37T654T238					ENCL	OPSB						
SER #						CC	010A	IP	23				
HP	10					MAG CUR	6.8/3.4						
VOLTS	230/460					NEMA NOM. EFF					91.7		
AMPS	23/11.5						PF	90					
RATING	40C AMB-CONT												
RPM	3500					MAX RPM	5400						
FRAME	213TC	HZ	60	CODE			J	CLASS	F				
SER.F.	1.15	SF AMP	26/13				PH	3	DES	A			
DE	6307		ODE	6206									
LUBRICATION	POLYREX EM												
ID LOGO	INVERTER TYPE			VPWM		CHP	60	TO	90	1.5:1			
ID LOGO	WK2	0.329	CT	6	TO	60	10:1						
ID LOGO	SL HZ	1.7	VT	3	TO	60	20:1						
							QR						
YR													

AC Induction Motor Performance Data

Record # 101129

Typical performance - not guaranteed values

Winding: 37WGT238-R015				Type: 3736M		Enclosure: OPSB			
Nameplate Data				460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		10		Full Load Torque		15 LB-FT			
Volts		230/460		Start Configuration		direct on line			
Full Load Amps		23/11.5		Breakdown Torque		82 LB-FT			
R.P.M.		3500		Pull-up Torque		28 LB-FT			
Hz		60 Phase		3		Locked-rotor Torque		38 LB-FT	
NEMA Design Code		A		KVA Code		J		Starting Current	98 A
Service Factor (S.F.)		1.15		No-load Current		3.4 A		Line-line Res. @ 25°C	0.786 Ω
NEMA Nom. Eff.		91.7		Power Factor		90		Temp. Rise @ Rated Load	23°C
Rating - Duty		40C AMB-CONT		Temp. Rise @ S.F. Load		29°C		Locked-rotor Power Factor	32.8
S.F. Amps		26/13		Rotor inertia		0.329 lb-ft²			

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	67	86	89	90	88	87	89
Efficiency	85.6	90.9	92	91.8	91.1	90.1	91.4
Speed	3579	3557	3532	3507	3478	3448	3490
Line amperes	4.2	6.1	8.7	11.3	14.5	17.6	13.2


ABB Motors and Mechanical Inc.

WINDING # 37WGT238

Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 3500 RPM 460 V 3736M

TORQUES (LB-FT) : PO=82 PU=28 LR=38 LRA=98

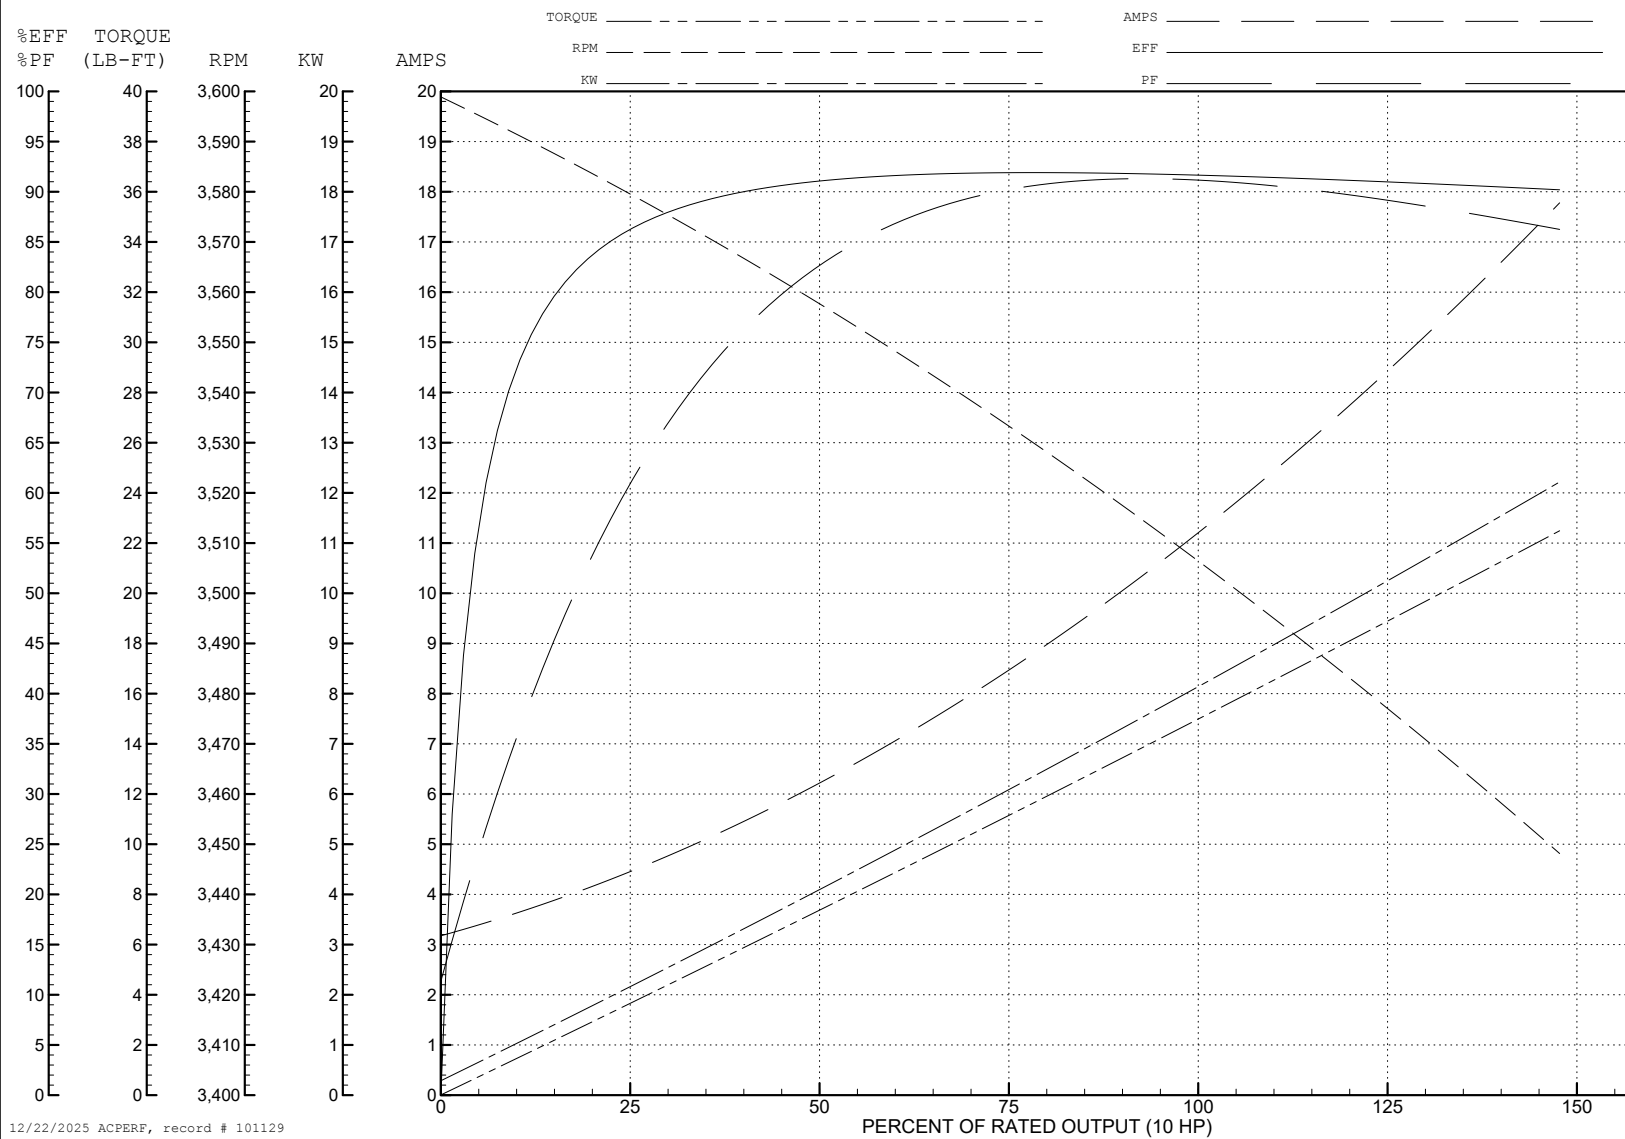

12/22/2025 ACPERF, record # 101129

