



Customer information packet

VXL050322A

.33HP, 3450RPM, 1PH, 60HZ, 56C, 3416L, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 230.0 V 6.000 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	59.9 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.0 a
Insulation Class	B

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	34WGX609
Layout	34LY5335
Eff. date	05-01-2024
CD Diagram	CD0565
Poles	02
Leads	4#18 A&J,1#16 #4TH
Proprietary	False
Created date	05-06-2021

Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.22 IN
Power Factor	64
Product Family	Hazardous Location Motor
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP
Winding Thermal 2	None

Nameplate

NP0016XPSL									
NO.		CC							
SER. #									
SPEC	34-0000-0405								
CAT.NO.	VXL050322A								
H.P.	.33		T. CODE		T3C				
VOLTS	115/230								
AMPS	6/3								
R.P.M.	3450 34WGX609								
HZ	60		PH	1	CLASS		B		
SER.F.	1.00		DES	N	CODE		M		
RATING	40C AMB-CONT								
FRAME	56C		NEMA NOM. EFF				59.9		
		PF	64						
BLANK	NEMA MG-1 PART 5, IP54								

AC Induction Motor Performance Data

Record # 57252

Typical performance - not guaranteed values

Winding: 34WGX609-R003			Type: 3416L		Enclosure: TEFC		
Nameplate Data			230 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.33	Full Load Torque		0.51 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		6/3	Breakdown Torque		1.9 LB-FT		
R.P.M.		3450	Pull-up Torque		1.2 LB-FT		
Hz	60 Phase	1	Locked-rotor Torque		1.4 LB-FT		
NEMA Design Code		N	KVA Code		M	Starting Current	16 A
Service Factor (S.F.)		1.75	No-load Current		2.4 A		
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C	4.84 Ω A Ph 3.7 Ω B Ph
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load				
S.F. Amps		7.4/3.7	Temp. Rise @ S.F. Load				

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	40	49	57	64	70	75	82
Efficiency	28.6	44.7	52.4	60	60.3	61.9	60.9
Speed	3560	3544	3527	3508	3483	3460	3433
Line amperes	2.5	2.6	2.7	2.9	3.15	3.4	3.65


ABB Motors and Mechanical Inc.


WINDING # 34WGX609

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 3450 RPM 230 V 3416L

TORQUES (LB-FT): PO=1.9 PU=1.2 LR=1.4 LRA=16

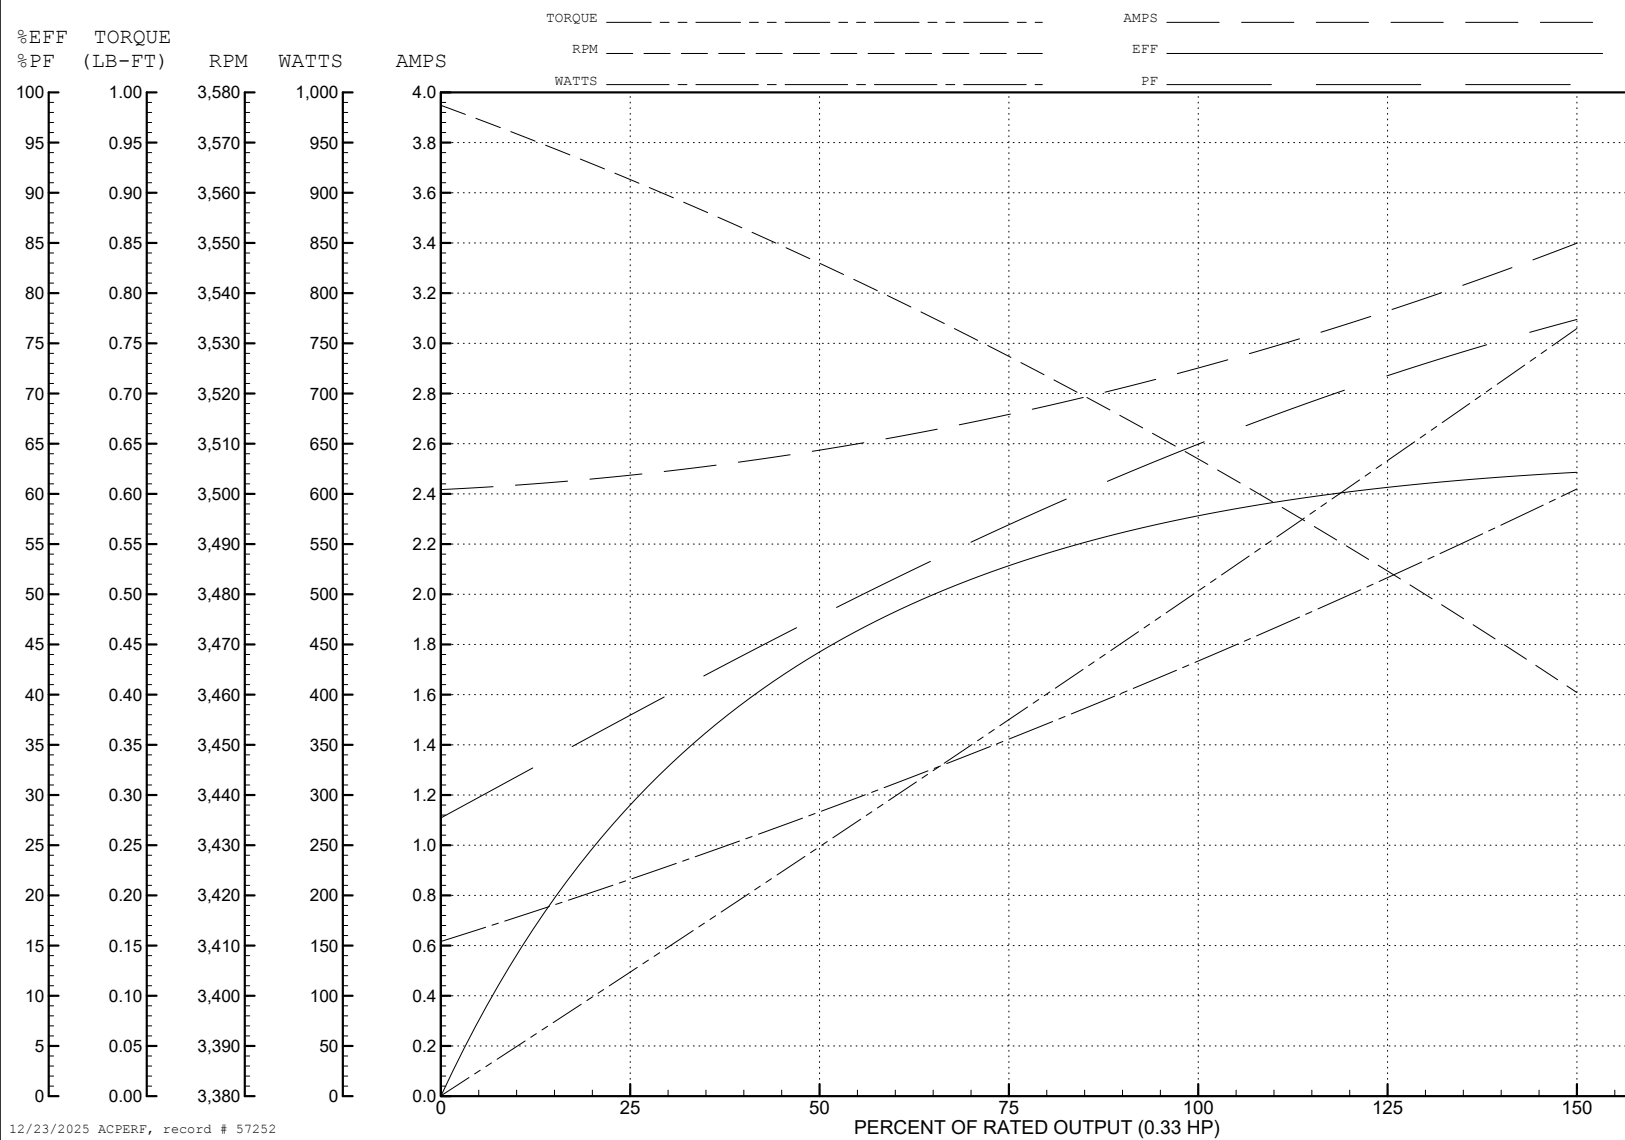

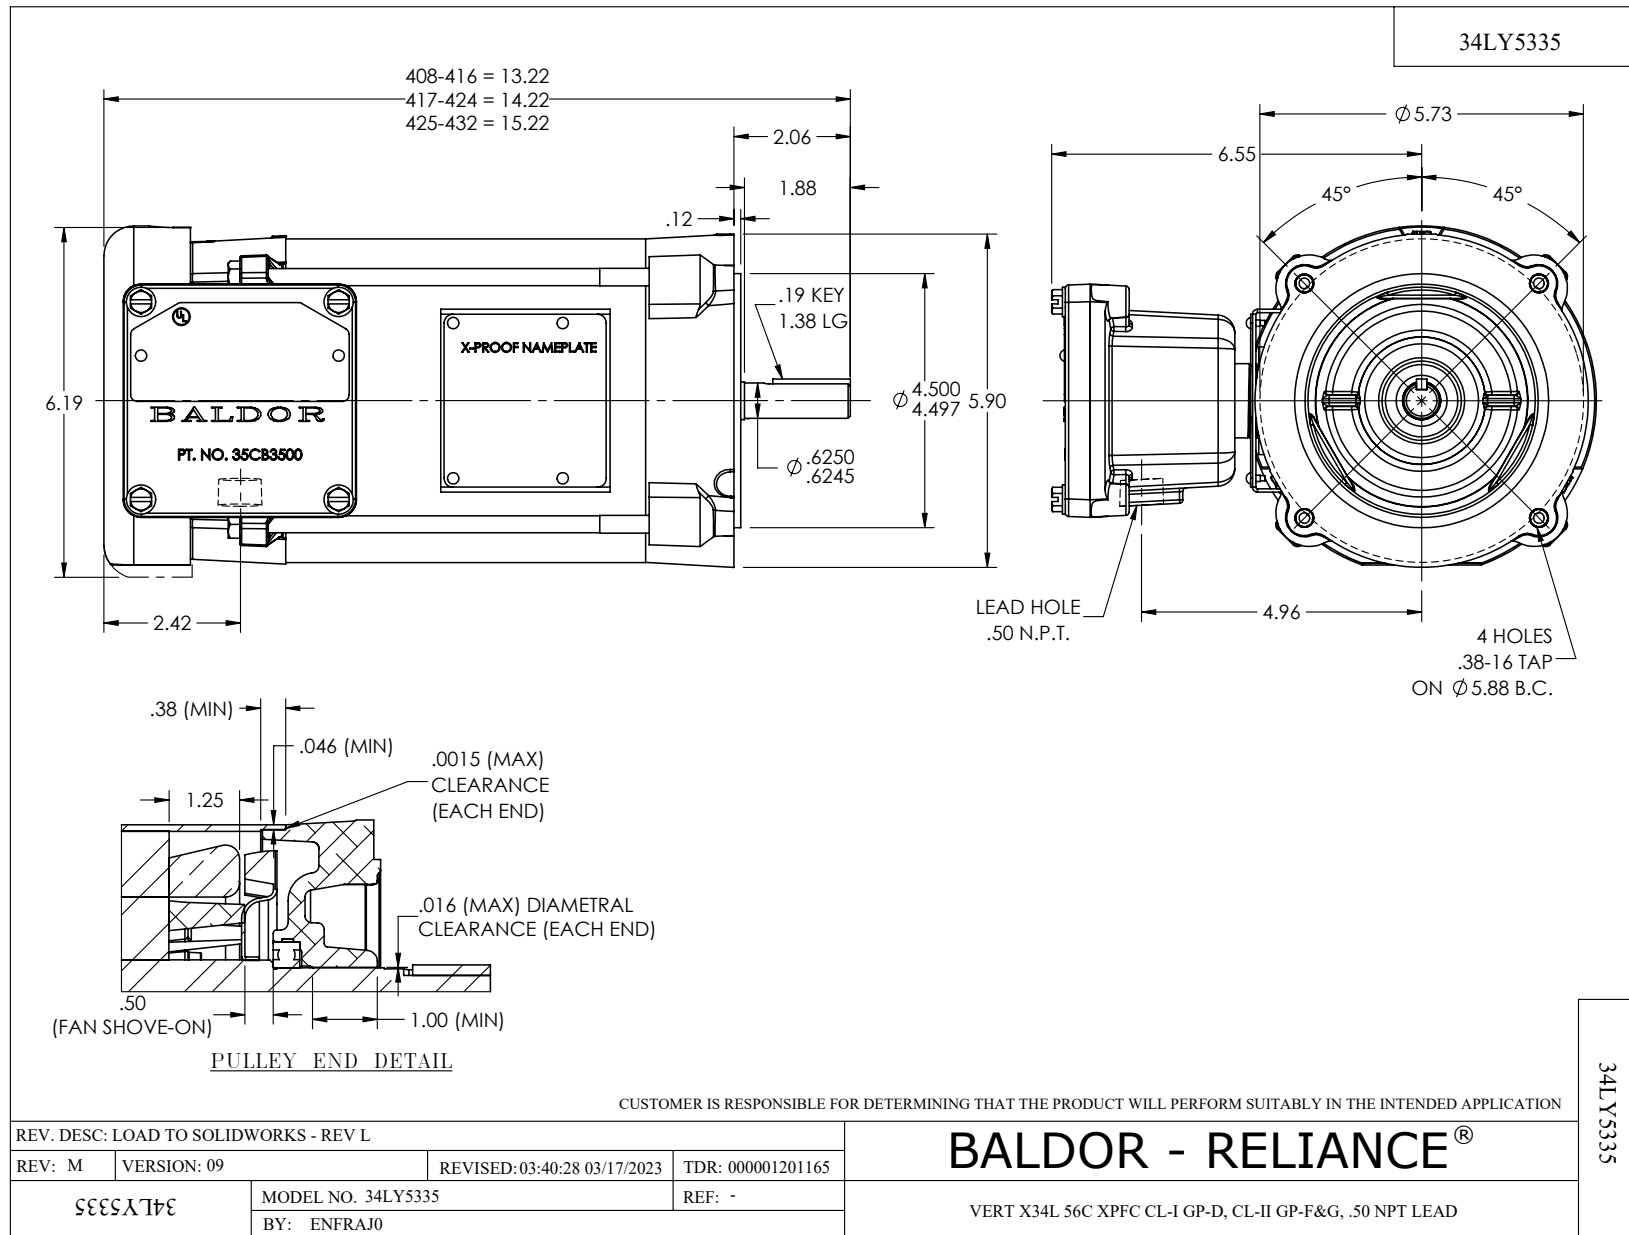

CD0094

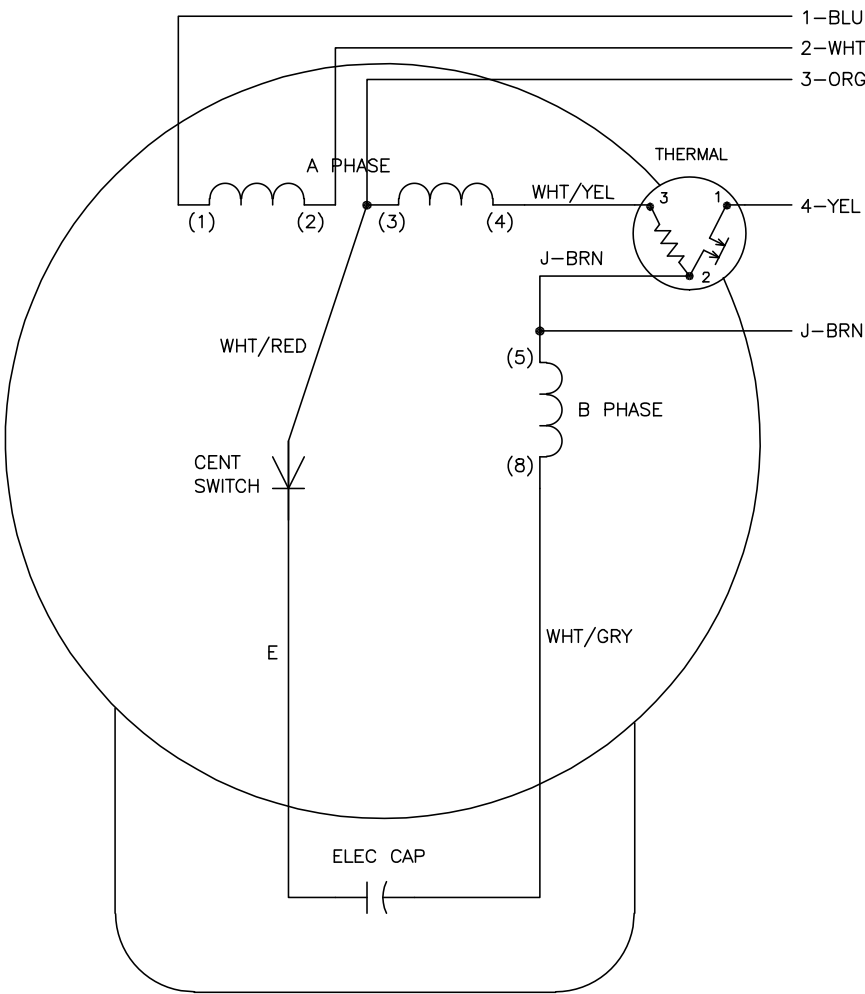

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	2,J	—

- NOTES:
1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.


CD0094

REV. DESC: ADD B PH AMPS THRU HTR HVC TO DESCRIPTION		
REV. LTR: F	VERSION: 02	TDR: 000001258306
FILE: \AAA\00007\476	REVISED: 03:40:33 06/18/2025	BY: ENBRIR0
MTL: —	© □	

BALDOR - RELIANCE®

TYPE L, DV, FIX, THERMAL, B PH AMPS THRU HTR HVC, 5 LEAD
SH 1 of 1

CD0565

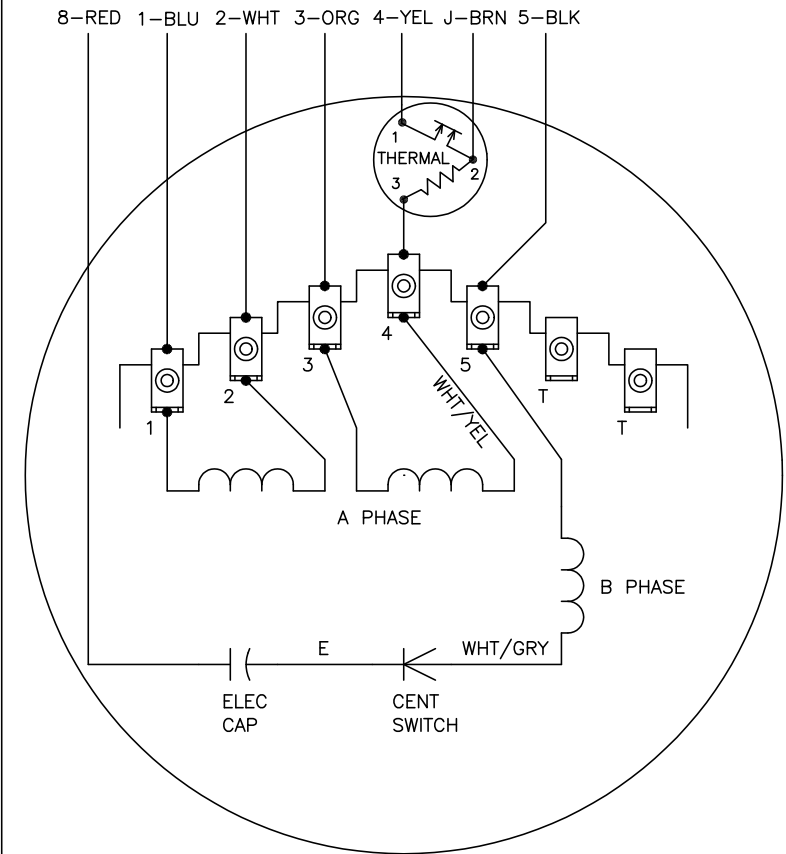


	LINE A	LINE B	JOIN	JOIN
HIGH STD	1	4	2,3,8	J,5
HIGH OPP	1	4	2,3,5	J,8
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CONNECTIONS FOR TWO-TERMINAL THERMAL



REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: C

BY: JLP

REVISED: 04/08/99 3:25

TDR: 0178636

S99000

FILE: AAA00014311

MDL: —

MTL: —

BALDOR ELECTRIC Co.

TYPE L, DV, REV, THERMAL, 7 LD, 34XP

CD0565