



Customer information packet

WDNMM3546-4

.75KW, 1700RPM, 3PH, 60HZ, D80, 3436M, TENV, B3

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	D80
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 KW @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.500 A @ 460.0 V
Design Code	D
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	75.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F

Part detail

Revision	Q
Type	AC
Mech. spec.	34M821
Base	
Status	PRD/A
Elec. spec.	34WGR446
Layout	34LYM821
Eff. date	12-01-2025
CD Diagram	CD0006
Poles	04
Leads	3#18 Y
Proprietary	False
Created date	05-18-2016

Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3436M
Mounting Arrangement	B3
Number of Poles	4
Overall Length	12.00 IN
Power Factor	79
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.748 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1700 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1575L									
CAT.NO.	WDNMM3546-4								
SPEC.	34M821R446G1								
IEC FRAME	D80	K.W.		.75 TE					
VOLTS	460								
AMP	1.5								
RPM	1700			I.P.					
HZ	60		PH	3	CL	F			
SER.F.	1.00		DES	D	CODE		K		
NEMA-NOM-EFF	75.5		PF	79					
RATING	40C AMB-CONT								
CC		USABLE AT 208V					N/A		
DE	6205	ODE	6203						
SER. #									

AC Induction Motor Performance Data

Record # 58192

Typical performance - not guaranteed values

Winding: 34WGR446-R001				Type: 3436M		Enclosure: TENV	
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (KW)		.75		Full Load Torque		3.098 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		1.5		Breakdown Torque		9.71 LB-FT	
R.P.M.		1700		Pull-up Torque		8.32 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		12.83 LB-FT	
NEMA Design Code		D	KVA Code	K	Starting Current		10.99 A
Service Factor (S.F.)		1		No-load Current		0.902 A	
NEMA Nom. Eff.		75.5	Power Factor	79	Line-line Res. @ 25°C		14.1 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		105°C	
				Locked-rotor Power Factor		50	
				Rotor inertia		0.0857 LB-FT2	

Load Characteristics 460 V, 60 Hz, 0.75 KW

% of Rated Load	25	50	75	100	125	150
Power Factor	42	61	73	79	85	88
Efficiency	58.7	71.4	74.4	76.8	72.5	68.9
Speed	1773	1748	1721	1693	1651	1601
Line amperes	0.946	1.1	1.3	1.537	1.9	2.33


ABB Motors and Mechanical Inc.


WINDING # 34WGR446

Typical performance - not guaranteed values.

0.75 KW 3 PH 60 HZ 1700 RPM 460 V 3436M

TORQUES (LB-FT): PO=9.71 PU=8.32 LR=12.83 LRA=10.99

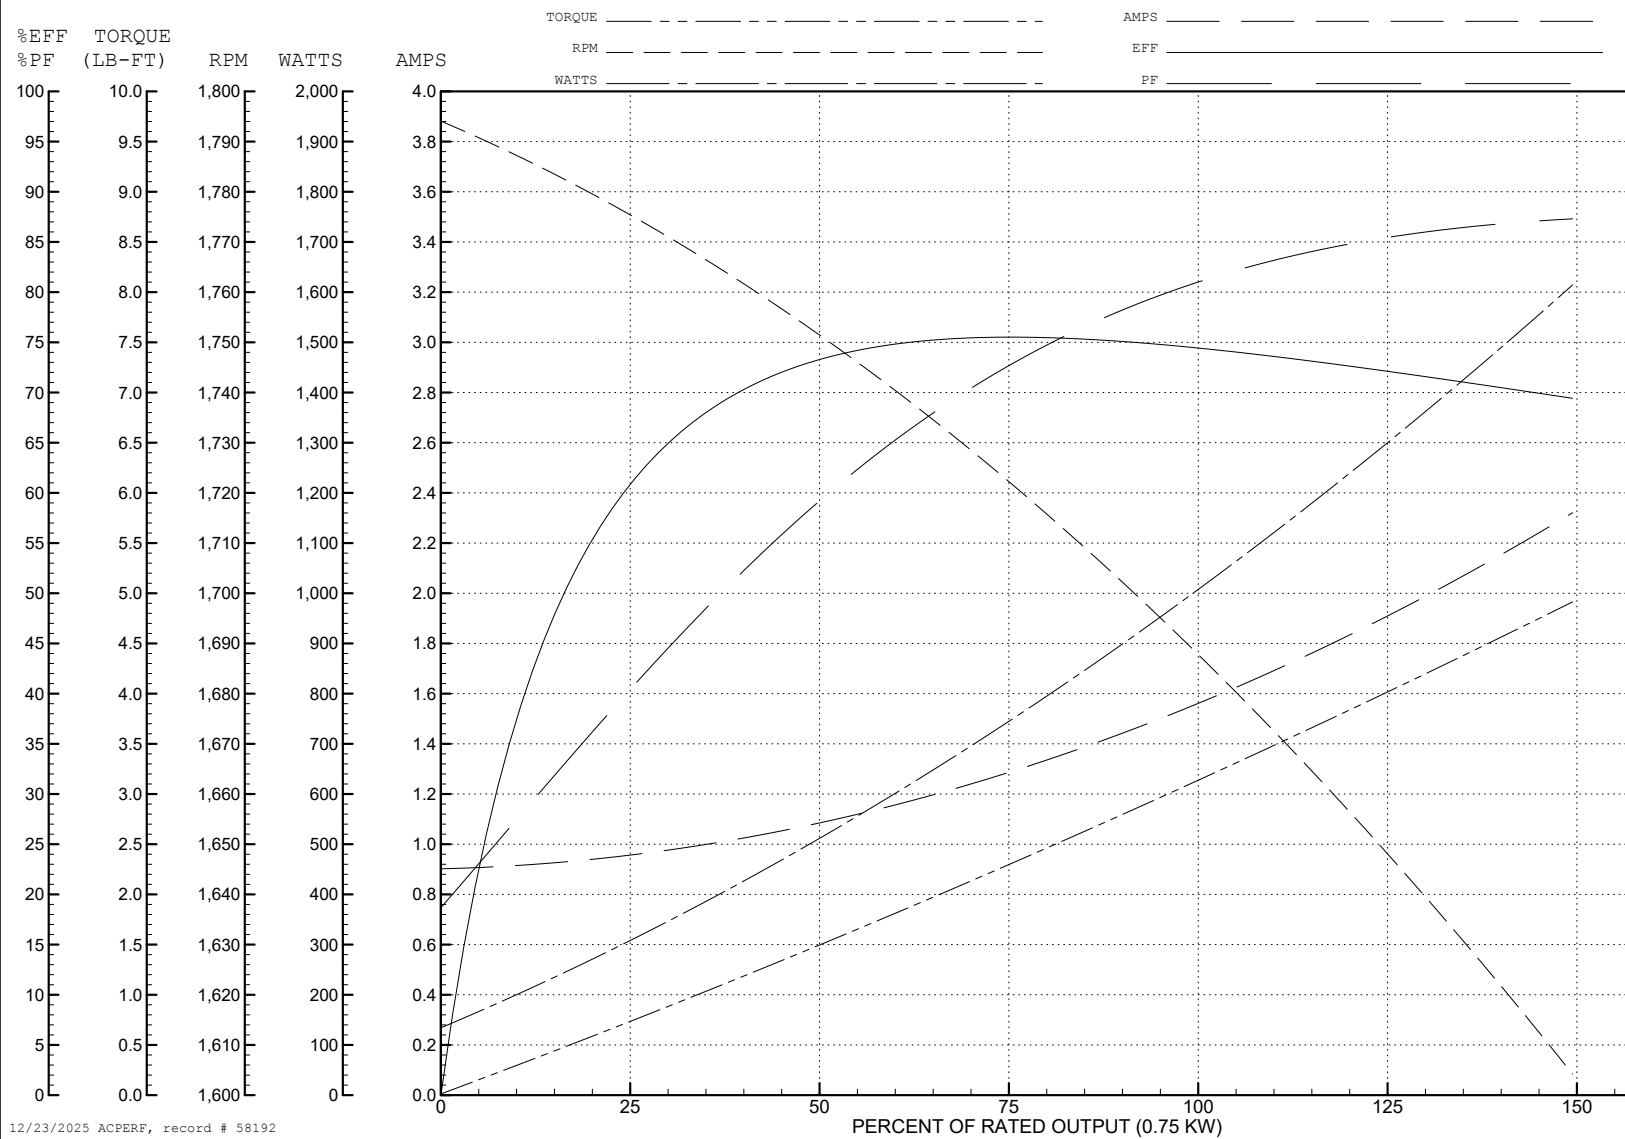

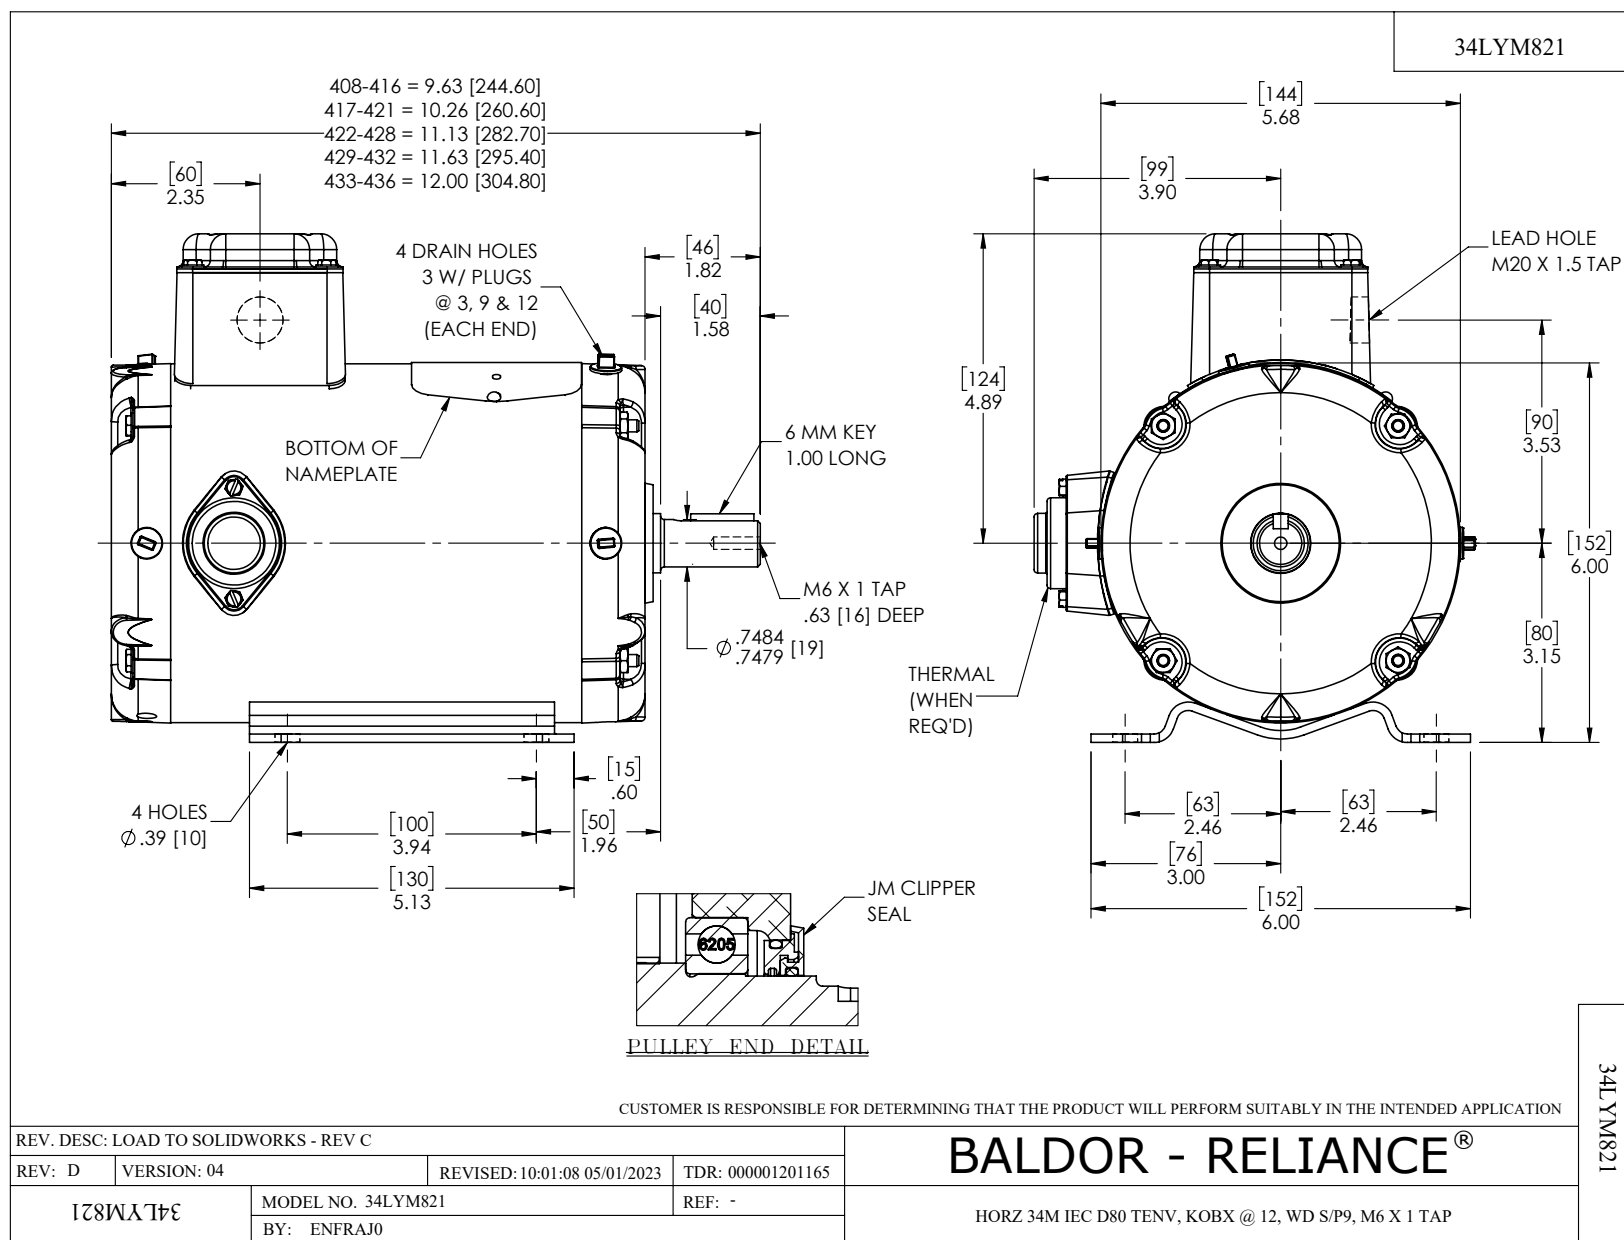

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

J-BRN

OPTIONAL THERMOSTATS

J-BRN

3-ORG

2-WHT

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

J-BRN

2-WHT

OPTIONAL THERMOSTATS

J-BRN

3-ORG

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD0006

34WGR297: Electrical Design

Page 8 of 8