

**BALDOR • RELIANCE**

---

# Customer information packet

## XEFRPM28304

30HP, 1800, 460V, HL286T, TEFC, F1

## Specifications

Enclosure	TEFC
Frame	HL286T
Frame Material	Exposed Laminations
Frequency	60.00 Hz
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US NEMA PREMIUM
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	1-60
Current @ Voltage	30.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	HL
Heater Indicator	No Heater
High Voltage Full Load Amps	30.0 a
Insulation Class	H
KVA Code	G
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	27.37 IN
Product Family	Fan
Pulley End Bearing Type	Ball
Pulley Face Code	Other
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

## Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	LS7019A
Layout	619697-001
Eff. date	04-23-2019
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	05-13-2016

<b>Speed</b>	1800 rpm
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None

**Nameplate**

**000613007QF**

	<b>DUTY</b>	<b>HP</b>	<b>RPM</b>	<b>AMPS</b>	<b>VOLTS</b>	<b>HZ</b>					
	CONT	30	1800	30.0	460	60					
<b>CAT.NO.</b>	XEFRPM28304		<b>SPEC. NO.</b>		H28-A000-0001						
<b>SER.NO.</b>			<b>FRAME SIZE</b>		HL286T	<b>TYPE PSM</b>					
<b>AMB.</b>	40	<b>S.F.</b>	1.15	<b>ENCL.</b>	TEFC	<b>PH</b>	3	<b>DESIGN</b>	B	<b>CODE</b>	G
<b>NEMA NOM. EFF</b>	95.4		<b>GUARANTEED EFFICIENCY</b>		94.5		<b>POWER FACTOR</b>	97.3		<b>INSUL. CLASS</b>	H
<b>D.E. BRG.</b>	50BC03J30X		<b>O.D.E. BRG.</b>		45BC02J30X						
<b>VPWM INVERTER DUTY @1.0SF</b>	<b>CHP HZ</b>	60-90		<b>CT HZ</b>	1-60		<b>VT HZ</b>	0-60			
	X/T										

---

000692000VY

---

**MEAS OPEN CIRCUIT VOLTAGE**

---

IS  VOLTS AT  RPM.

---

S. O.	FRAME	HP	TYPE	PHASE	HERTZ	RPM
--	HL286T	30	PSM	3	60	1800
VOLTS	AMPS	DUTY	AMB <sup>OC</sup>	INSUL	S.F.	NEMA DESIGN
460	30.1	CONT	40	H	1.15	B

CODE LETTER	ENCL	ROTOR INERTIA (lb-ft <sup>2</sup> )	STATOR RES. @ 25°C OHMS (BETWEEN LINES)	TYPICAL DATA
G	TEFC	2.12	.3493	


**PERFORMANCE**

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	14.5	1800	4.10	N/A
1/4	7.48	11.8	1800	64.1	92.4
2/4	15.0	16.2	1800	91.1	95.0
3/4	22.4	22.9	1800	96.3	95.5
4/4	29.9	30.1	1800	97.3	95.4
5/4	37.4	37.9	1800	97.1	95.1

**SPEED TORQUE**


	RPM	TORQUE (% FULL LOAD)	TORQUE (lb-ft)	AMPERES
LOCKED ROTOR	0	180	157.2	216.8
PULL OUT	1800	244	212.9	107.0
FULL LOAD	1800	100	87.4	30.1

THIS IS A PERMANENT MAGNET MOTOR  
 GENERATED OPEN CIRCUIT LINE-LINE VOLTAGE at 25°C = 20.8 VOLTS PER 100 RPM  
 REMARKS:

 <p><b>BALDOR</b> A MEMBER OF THE ABB GROUP</p>	<table border="1" style="width: 100%;"> <tr> <td>DR. BY</td> <td>CAD</td> </tr> <tr> <td>CK. BY</td> <td>REM</td> </tr> <tr> <td>APP. BY</td> <td>REM</td> </tr> <tr> <td>DATE</td> <td>05/25/2016</td> </tr> </table>	DR. BY	CAD	CK. BY	REM	APP. BY	REM	DATE	05/25/2016
DR. BY	CAD								
CK. BY	REM								
APP. BY	REM								
DATE	05/25/2016								
<p><b>ISPM MOTOR PERFORMANCE DATA</b></p> <p>IS7019A ISSUE DATE 05/25/2016</p>									

S. O.	--	HERTZ	60	AMB°C	40	CODE LETTER	G
FRAME	HL286T	RPM	1800	INSUL	H	WK <sup>2</sup> (lb-ft <sup>2</sup> )	2.12
HP	30	VOLTS	460	S. F.	1.15	NEMA DESIGN	B
TYPE	PSM	AMPS	30.1	ENCL	TEFC	STATOR RES. @ 25°C	.3493
PHASE	3	DUTY	CONT			OHMS (BETWEEN LINES)	

### Amps & Torque vs. RPM During Acceleration

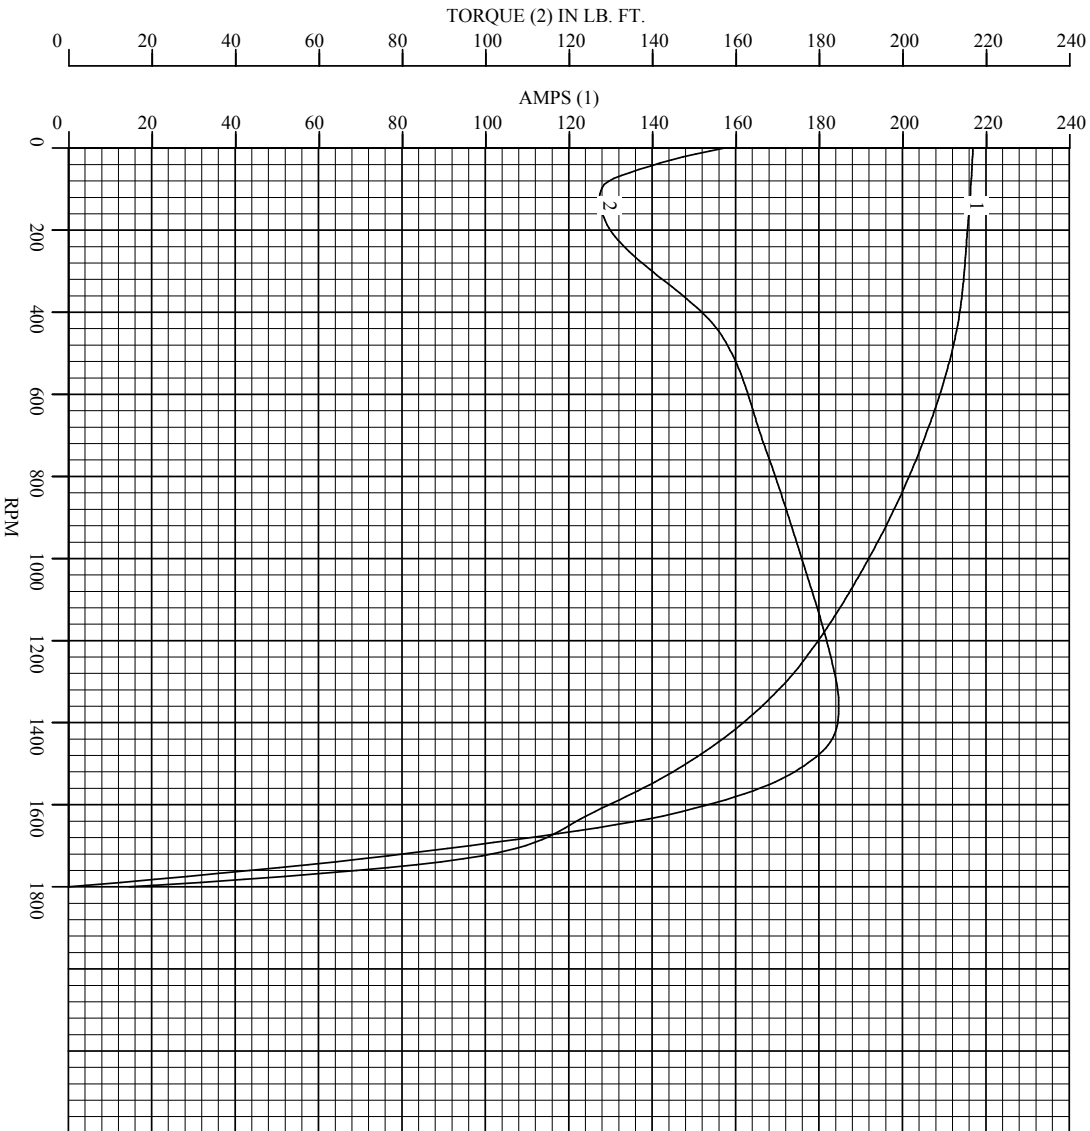

TYPICAL DATA




DR. BY \_\_\_\_\_ CAD  
 CK. BY \_\_\_\_\_ RIM  
 APP. BY \_\_\_\_\_ RIM  
 DATE 05/25/2016

**ISPM MOTOR PERFORMANCE CURVES**  
 ISSUE DATE **L57019A**  
 05/25/2016

S.O.	--	HERTZ	60	AMB°C	40	CODE LETTER	G
FRAME	HL286T	RPM	1800	INSUL	H	WK <sup>2</sup> (lb-ft <sup>2</sup> )	2.12
HP	30	VOLTS	460	S.F.	1.15	NEMA DESIGN	B
TYPE	PSM	AMPS	30.1	ENCL	TEFC	STATOR RES. @ 25°C	.3493
PHASE	3	DUTY	CONT			OHMS (BETWEEN LINES)	

### Performance Data vs. HP At Synchronous Speed

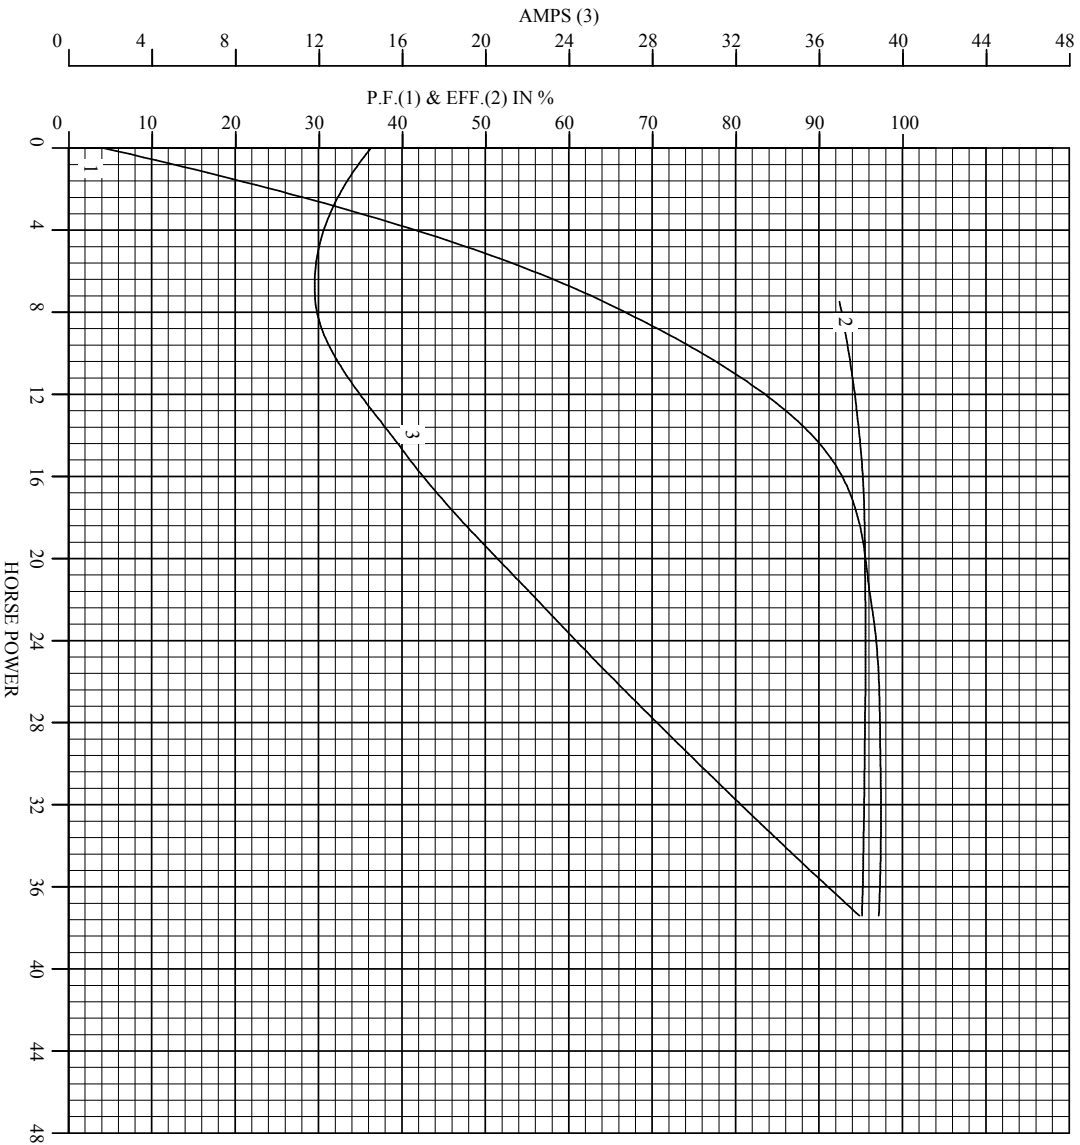


TYPICAL DATA



DR. BY \_\_\_\_\_ CAD  
 CK. BY \_\_\_\_\_ RIM  
 App. BY \_\_\_\_\_ RIM  
 DATE 05/25/2016


**ISPM MOTOR PERFORMANCE CURVES**  
 ISSUE DATE **L57019A**  
 05/25/2016



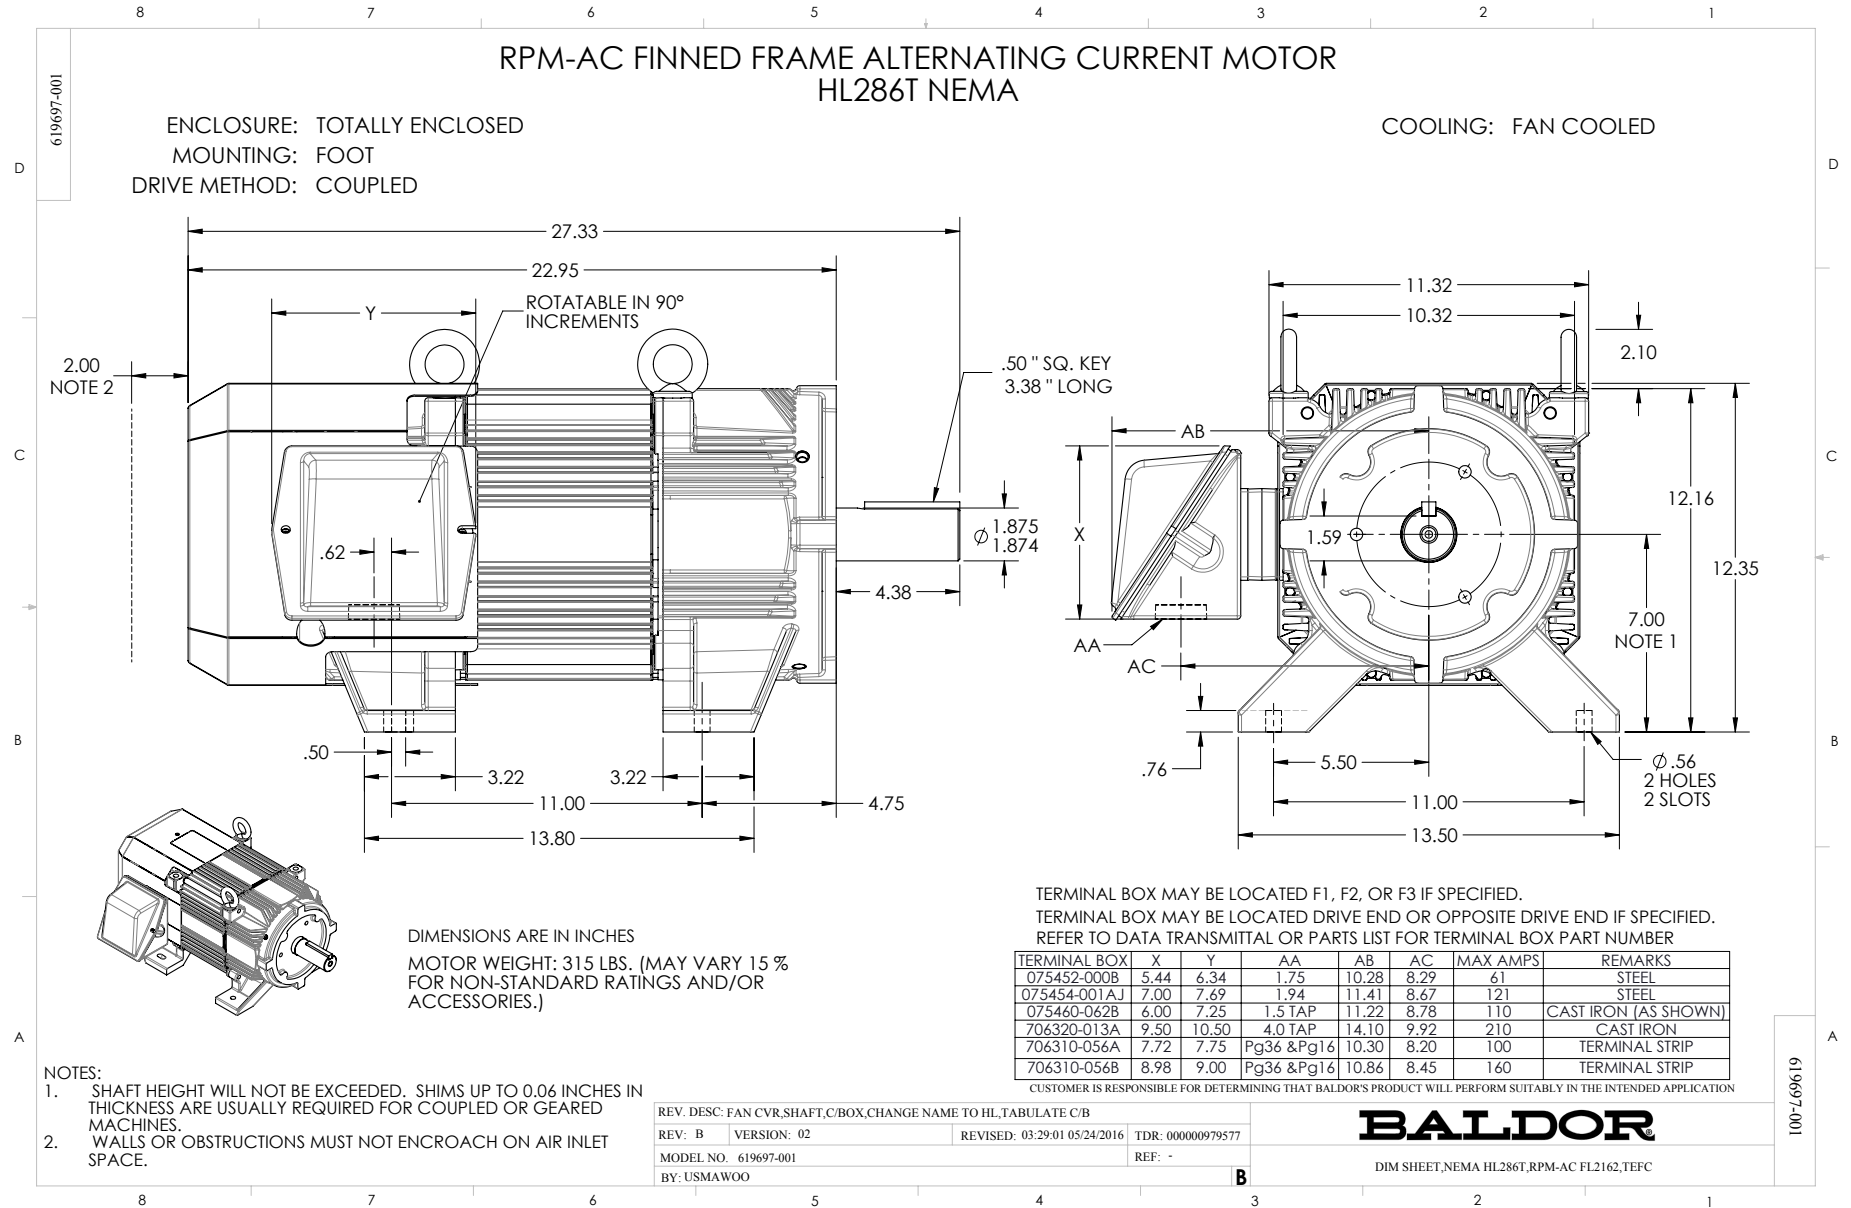

INDUSTRIAL ALTERNATING CURRENT MOTORS  
RPM AC

STEEL, CAST IRON, MILL AND TERMINAL BOARD CONDUIT BOX DIMENSIONS  
NEMA FRAMES RL210 thru RL280 and IEC FRAMES RDL132 thru RDL180  
NEMA FRAMES FL180 thru FL280 and IEC FRAMES FDL112 thru FDL180

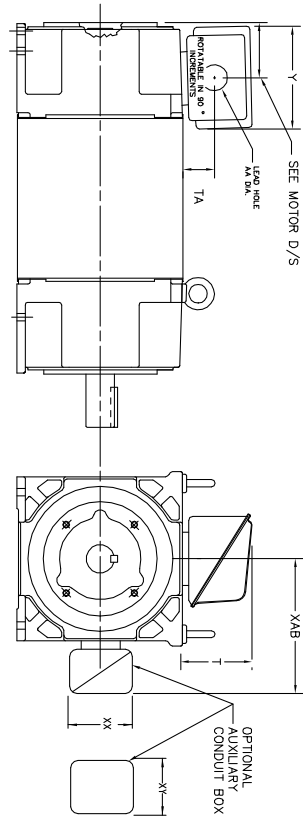

FRAME	TYPE	TERMINAL STRIP	AMPS	C/BOX	Y	TA	T	AA
FL180	STEEL	N	40	706320003A	5.00	1.62	3.00	1.12
FL180	STEEL	N	75	706320003A	6.12	2.38	4.38	1.75/2.00
FL180	CAST IRON	N	208	706320007A	6.82	2.00	7.00	2.50/2.00
FL180	CAST IRON	Y/N	40	706320004A	5.75	2.38	4.38	1.50/1.75
FL180 & FDL11	MILL	Y	100	706310028A	7.75	2.30	4.40	PC29/PG18
FL210 & RL210	STEEL	N	61	0754520009	6.34	2.00	4.12	1.75
FL210 & RL210	STEEL	N	121	0754520010	7.69	2.38	5.25	1.94
FL210 & RL210	STEEL	N	336	706320016A	9.00	4.12	8.42	4.89
FL210 & RL210	CAST IRON	N	110	075460052B	7.25	2.50	5.25	1.5 TAP
FL210 & RL210	MILL	Y	100	706310225A	7.75	2.30	4.40	PC29/PG18
FL210 & RL210	MILL	Y	160	706310056A	9.00	3.06	5.40	PC36/PG16
FL210 & RL210	MILL	Y/N	235	706310637A	11.42	4.00	6.72	2.50
FL250 & RL250	STEEL	N	61	0754520008	6.34	2.00	4.12	1.75
FL250 & RL250	STEEL	N	121	0754520009	7.69	2.38	5.25	1.94
FL250 & RL250	CAST IRON	N	110	075460052B	7.25	2.50	5.25	1.5 TAP
FL250 & RL250	CAST IRON	N	210	706320017A	10.50	4.88	9.00	4.0 TAP
FL250 & RL250	MILL	Y	100	706310225A	7.75	2.30	4.40	PC29/PG18
FL250 & RL250	MILL	Y	160	706310056A	9.00	3.06	5.40	PC36/PG16
FL250 & RL250	MILL	Y/N	235	706310637A	11.42	4.00	6.72	2.50
FL250 & RL250	MILL	Y	400	706310063B	14.39	7.43	12.15	BLANK

FRAME	TYPE	TERMINAL STRIP	AMPS	C/BOX	Y	TA	T	AA
FL280 & RL280	STEEL	N	160	706320029A	7.25	3.50	7.06	2.50
FL280 & RL280	STEEL	N	300	706320030A	8.00	4.12	8.42	4.89
FL280 & RL280	STEEL	N	500	702560010C	14.62	7.56	12.70	5.00
FL280 & RL280	CAST IRON	N	140	706320012B	9.25	4.81	8.56	3.0 TAP
FL280 & RL280	CAST IRON	N	210	706320015A	10.50	4.88	9.00	4.0 TAP
FL280 & RL280	CAST IRON	N	510	706320014D	15.00	7.56	12.81	5.0 TAP
FL280 & RL280	MILL	Y	100	706310056A	7.75	2.30	4.40	PC29/PG16
FL280 & RL280	MILL	Y	160	706310056B	9.00	3.06	5.40	PC36/PG16
FL280 & RL280	MILL	Y/N	235	706310637A	11.42	4.00	6.72	2.50
FL280 & RL280	MILL	Y	400	706310063B	14.39	7.43	12.15	BLANK

FRAME SIZE	OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)								
	XAB	XX	XY	PART NUMBER	FRAME SIZE	PART NUMBER			
FL210/FL180/FL132	7.38	4.25	4.25	602007-26-A	FL210/FL180/FL132	10.88	8.00	8.00	706310-3-B
FL250/FL160/FL112	8.44	4.25	4.25	602007-26-A	FL250/FL160/FL112	11.88	8.00	8.00	706310-3-B
FL280/FL190/FL280/FL180	9.12	4.25	4.25	602007-26-A	FL280/FL190/FL280/FL180	12.62	8.00	8.00	706310-3-B

(1) 7/8" PIPE TAP  
(2) CUSTOMER TO PROVIDE W/LE TERE CONDUIT.  
(3) 2" DIA. SA OR 1" DIA. DIA. W/2"

TERMINAL BOX CAN BE ROTATED FOR LEAD INLET AT TOP, SIDES OR BOTTOM.  
TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, V-1, V-4, V-5, V-7.  
OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED.

050-677919


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD 706310-637 & 639 BOX	VERSION: 06	TDR: 000001180260
REV. LTR: F	REVISED: 11: 08: 56 10/26/2021	BY: RCGRWM
FILE: \RGG\00003\692		
MTL: -		

BALDOR - RELIANCE®

DIM SHT NEMA RL210-RL280 FL180-FL280 IEC RDL132-RDL180

422927-001

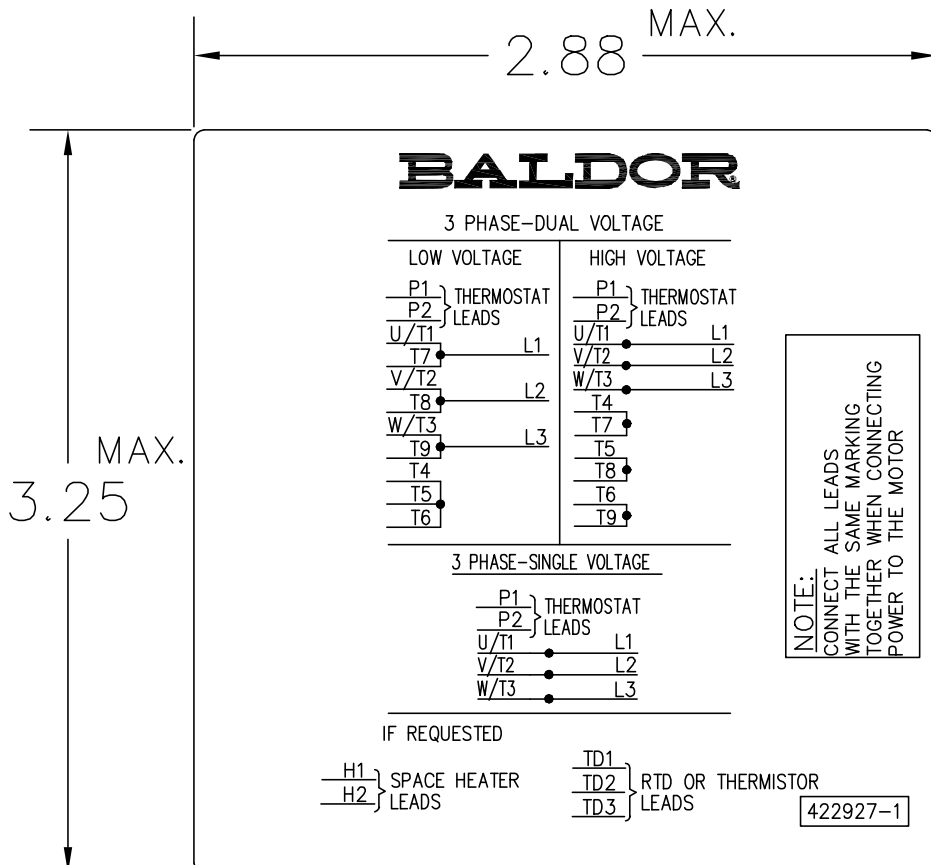

NOTE:  
DATA TO BE SIZED  
SO THAT IT FITS INTO  
MATERIAL DECAL  
DIMENSIONS. MAKE  
LETTERS & NUMBERS  
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4  
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS  
AND LINES TO BE BLACK  
ON WHITE BACKGROUND.

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 00000788708
FILE: \RGG\00000\203	REVISED: 08:09:29 03/04/2013	
MTL: -	BY: RGGWT	

**BALDOR**

EXTERNAL CONNECTION LABEL

SH 1 of 1