



Customer information packet

XM050362A

.33HP, 1170RPM, 3PH, 60HZ, 56, 3512M, TEFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.600 A @ 230.0 V 1.400 A @ 208.0 V .800 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T4

Part detail

Revision	C
Type	AC
Mech. spec.	35E354
Base	
Status	PRD/A
Elec. spec.	35WGG350
Layout	35LYE354
Eff. date	12-12-2024
CD Diagram	CD0007
Poles	06
Leads	12#18
Proprietary	False
Created date	12-19-2022

Heater Indicator	No Heater
High Voltage Full Load Amps	0.8 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	12 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X3512M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	14.30 IN
Power Factor	55
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1170 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use Eve-Not Valid
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload

Winding Thermal 1 Location	SB
Winding Thermal 2	None

Nameplate

NP0016XP SL									
NO.		CC							
SER. #									
SPEC	35E354G350								
CAT.NO.	XM050362A								
H.P.	.33 TE	T. CODE	T4						
VOLTS	208-230/460								
AMPS	1.4-1.6/.8								
R.P.M.	1170								
HZ	60	PH	3	CLASS	F				
SER.F.	1.00	DES	B	CODE	M				
RATING	40C AMB-CONT								
FRAME	56	NEMA NOM. EFF	70						
	PF	55							
BLANK									

AC Induction Motor Performance Data

Record # 109833

Typical performance - not guaranteed values

Winding: 35WGG350-R001			Type: 3512M		Enclosure: XPFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.33	Full Load Torque		1.502 LB-FT	
Volts		208-230/460	Start Configuration		direct on line	
Full Load Amps		1.4-1.6/.8	Breakdown Torque		6.05 LB-FT	
R.P.M.		1170	Pull-up Torque		3.26 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	3.64 LB-FT	
NEMA Design Code	B	KVA Code	M	Starting Current	4.18 A	
Service Factor (S.F.)			1	No-load Current	0.678 A	
NEMA Nom. Eff.	70	Power Factor	55	Line-line Res. @ 25°C	61.456 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load	31°C	
				Locked-rotor Power Factor	70.6	
				Rotor inertia	0.0871 lb-ft ²	

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	25	36	47	55	63	69
Efficiency	47.1	62.7	69.7	72.8	74.1	74.3
Speed	1191.5	1185	1177.9	1170.7	1162.6	1154.2
Line amperes	0.679	0.697	0.729	0.777	0.836	0.908

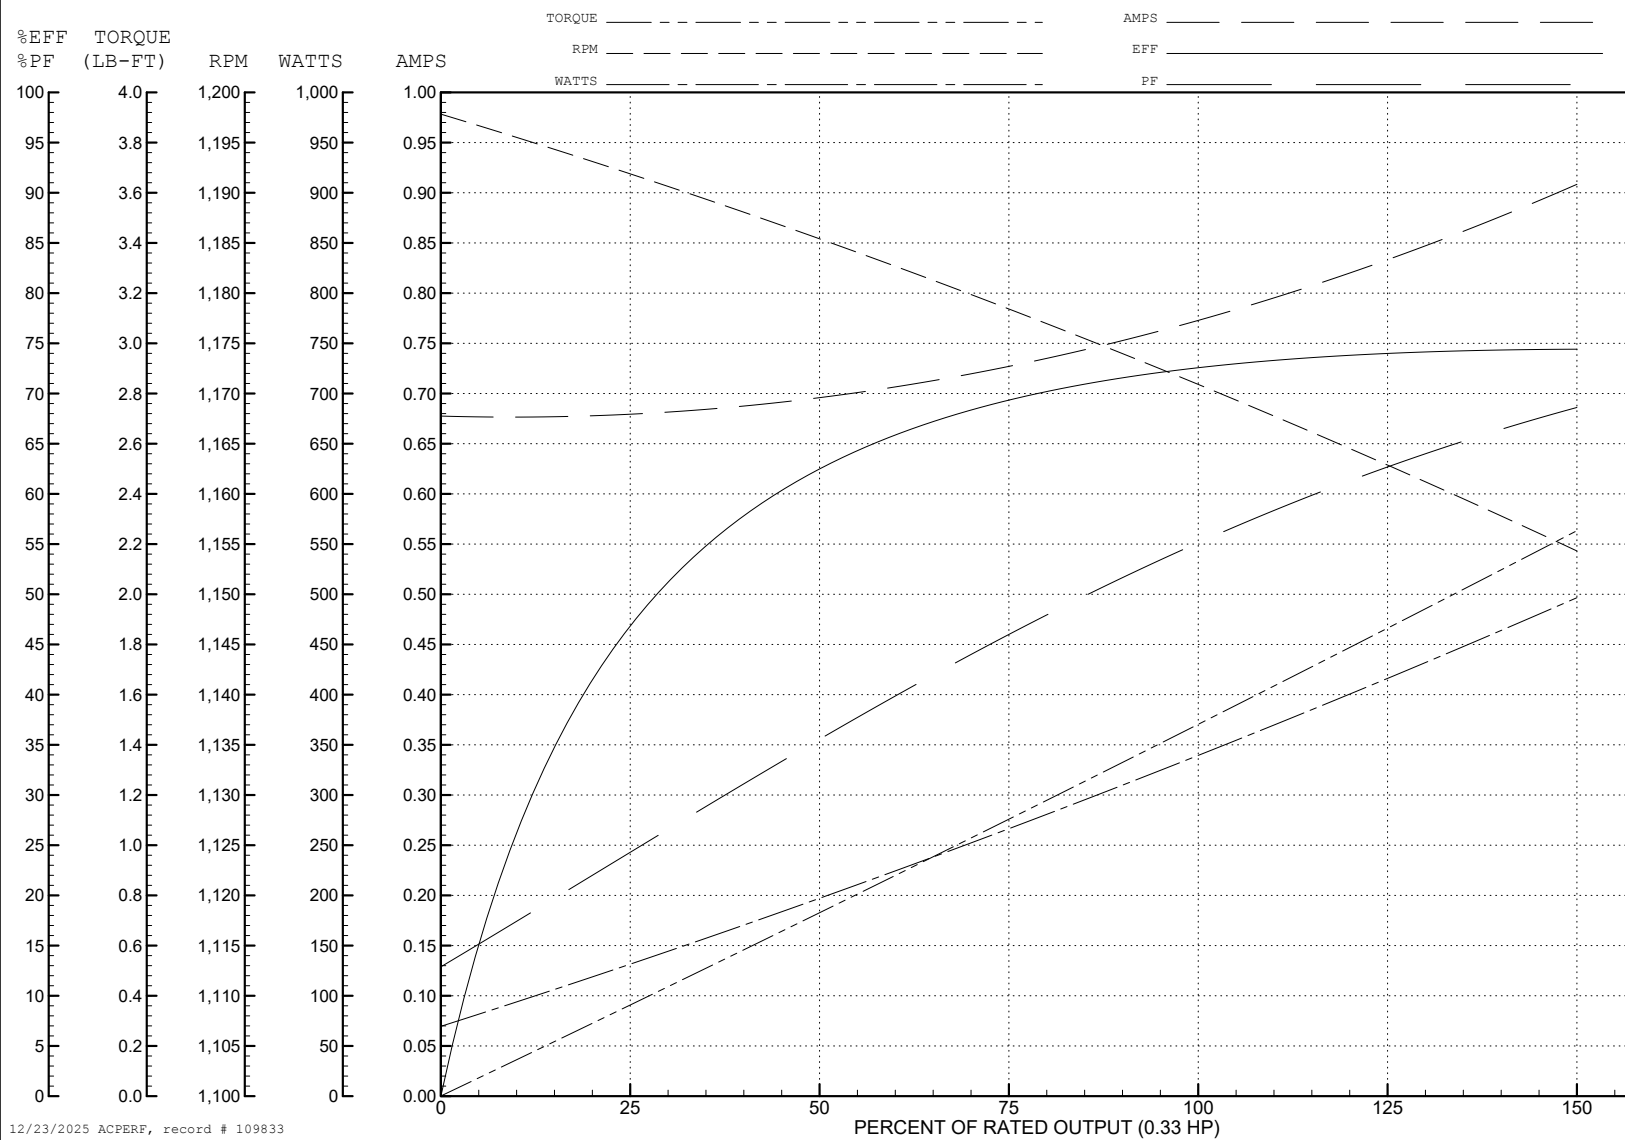
ABB Motors and Mechanical Inc.

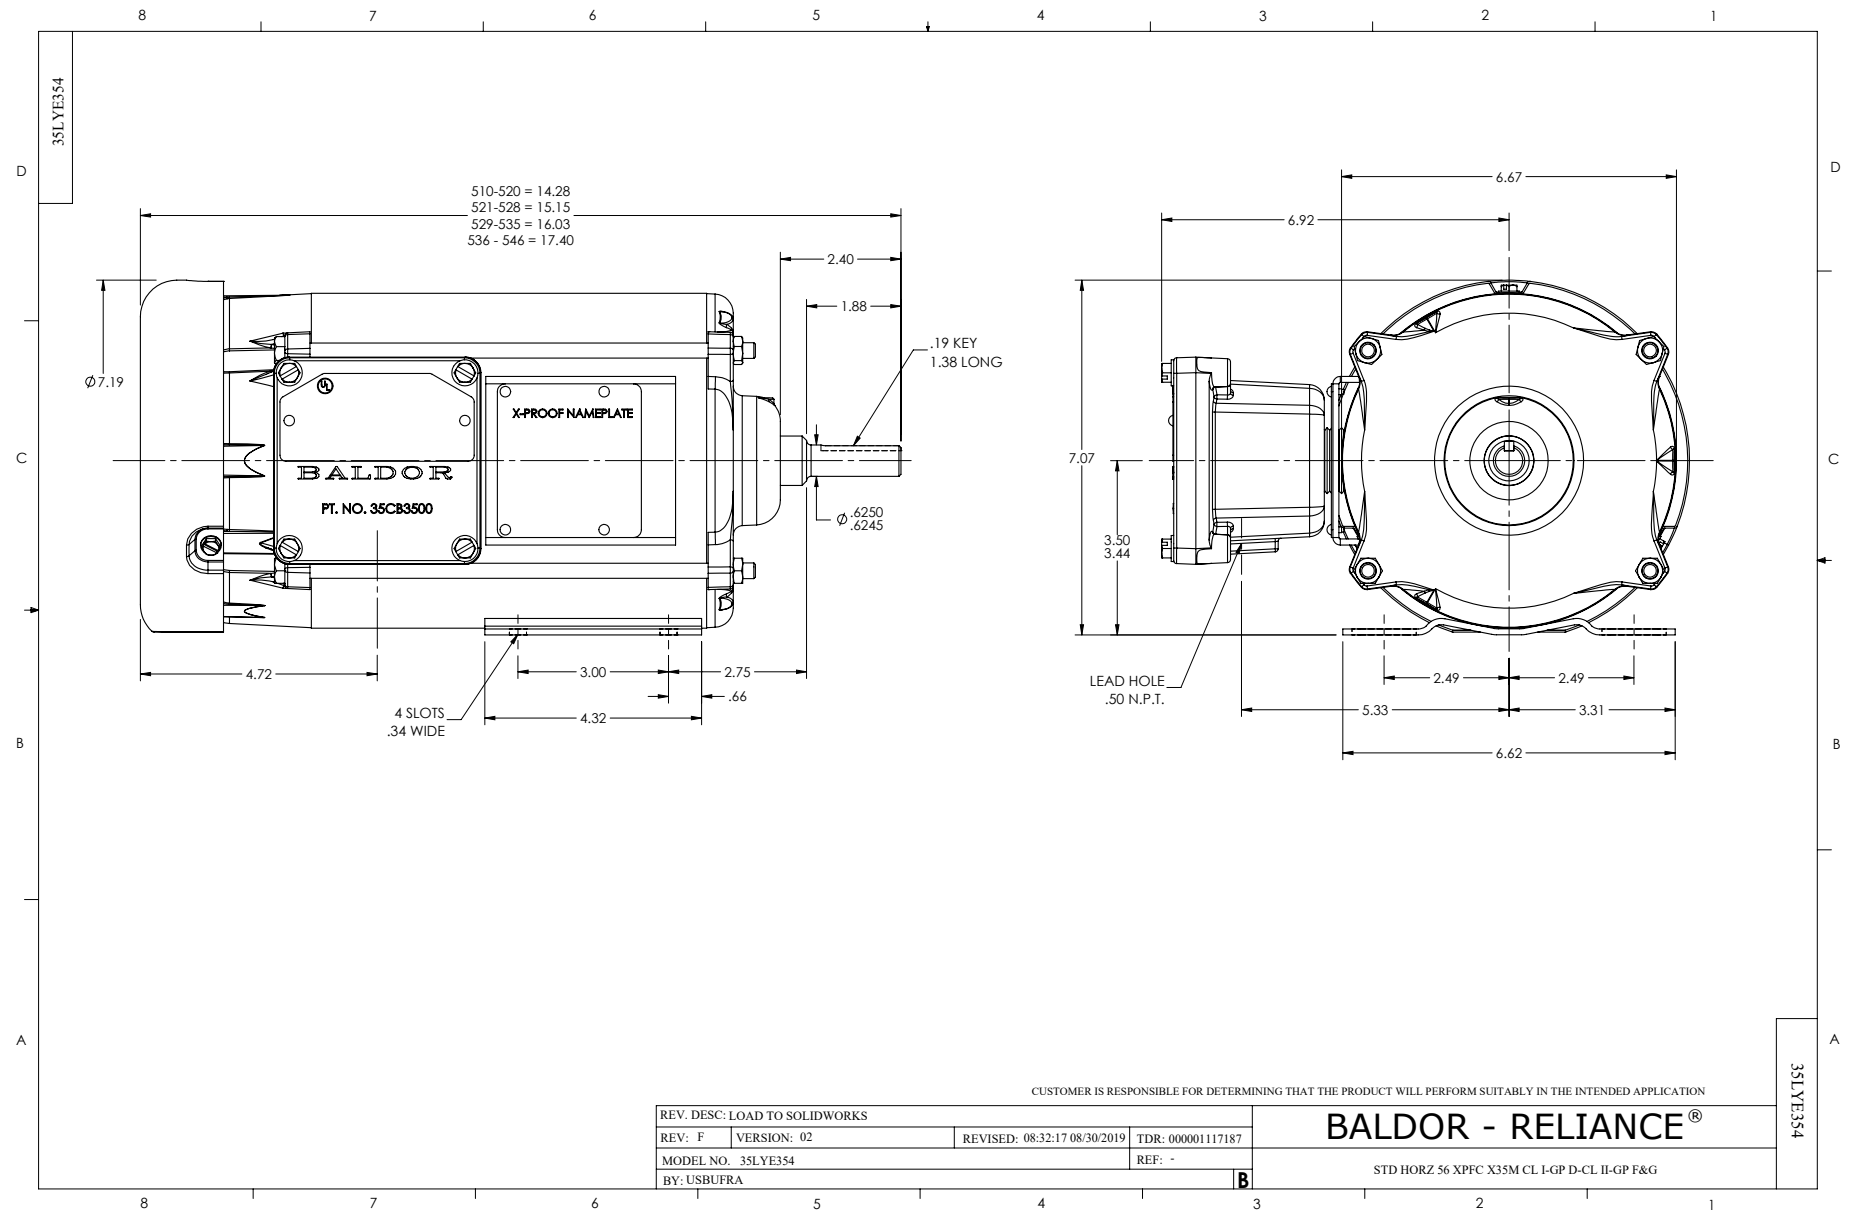
WINDING # 35WGG350

Typical performance - not guaranteed values.

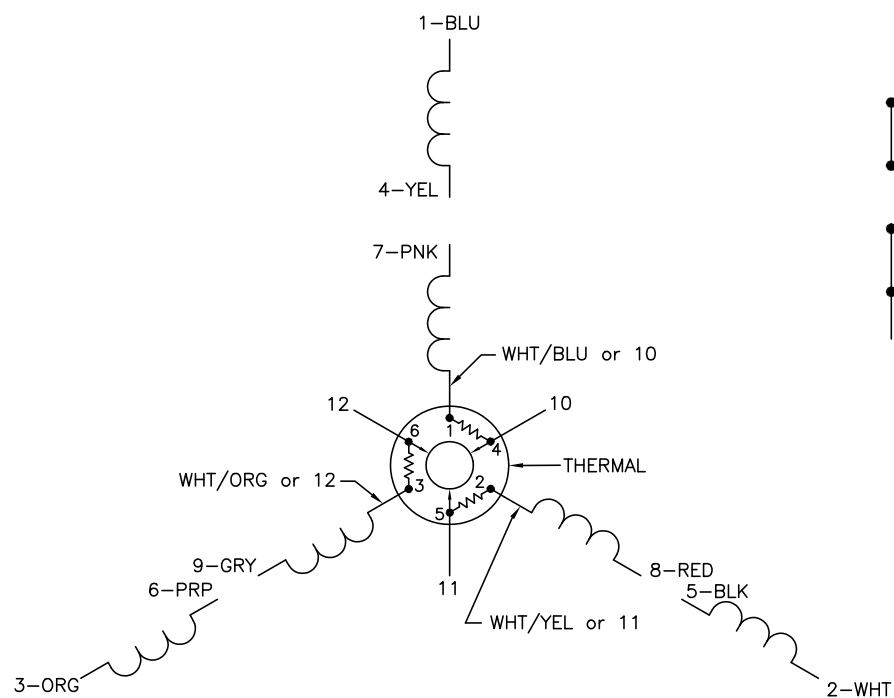

0.33 HP 3 PH 60 HZ 1170 RPM 460 V 3512M

TORQUES (LB-FT): PO=6.05 PU=3.26 LR=3.64 LRA=4.18






CD0007

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED "CK" PLANT CODE

REV. LTR: E

BY: EAH

REVISED: 05/06/99 17:1

TDR: 0181040

L00000

FILE: AAA00008370

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS

CD0007