



Customer information packet

XM21562T

5HP, 1165//975RPM, 3PH, 60HZ, 215T, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	215T
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ 3.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	11.900 A @ 190.0 V 14.400 A @ 230.0 V 5.900 A @ 380.0 V 7.200 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	37WGQ067
Layout	37LYN517
Eff. date	05-25-2021
CD Diagram	CD0005
Poles	06
Leads	9#14
Proprietary	False
Created date	04-04-2019

Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	5.9 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	20.82 IN
Power Factor	71
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1165 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0887XPSLEV											
NO.						CC	010A				
S/N						TEMP CODE		T3C			
SPEC.	37-0000-0042					INV.TYPE		PWM			
CAT.NO.	XM21562T					C HP FR		60	C HP TO		90
HP	5//3					CT HZ FROM		6	CT HZ TO		60
VOLTS	230/460//190/380					VT HZ FROM		6	VT HZ TO		60
AMPS	14.4/7.2//11.9/5.9				MAG CUR	8/4					
RPM	1165//975				MX RPM	1800					
HZ	60//50	PH	3	CL	F	NOM.EFF.		89.5			
SER.F.	1.00	DES	A	SL HZ	1.8	WK2		1.29			
FRAME	215T	RATING		40C AMB-CONT							
	55C AMB @ 1.0 SF										
	1.15 SF SINEWAVE				NEMA MG-1 PT 5,IP54						

AC Induction Motor Performance Data

Record # 73678

Typical performance - not guaranteed values

Winding: 37WGQ067-R008			Type: 3752M		Enclosure: XPFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		5//3		Full Load Torque		22.58 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		14.4/7.2//11.9/5.9		Breakdown Torque		83.25 LB-FT	
R.P.M.		1165//975		Pull-up Torque		52.2 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		55.5 LB-FT	
NEMA Design Code		A	KVA Code	K	Starting Current		55.3 A
Service Factor (S.F.)		1		No-load Current		3.96 A	
NEMA Nom. Eff.		89.5	Power Factor	71	Line-line Res. @ 25°C		1.65 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		61°C	
				Locked-rotor Power Factor		21.9	
				Rotor inertia		1.29 LB-FT2	

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	33	53	64	71	74	76
Efficiency	82.1	88.2	89.3	89.2	88.3	86.8
Speed	1192	1183	1174	1165	1154	1141
Line amperes	4.26	5.06	6.15	7.44	8.92	10.65


ABB Motors and Mechanical Inc.


WINDING # 37WGQ067

Typical performance - not guaranteed values.


5 HP 3 PH 60 HZ 1165 RPM 460 V 3752M

TORQUES (LB-FT): PO=83.25 PU=52.2 LR=55.5 LRA=55.3

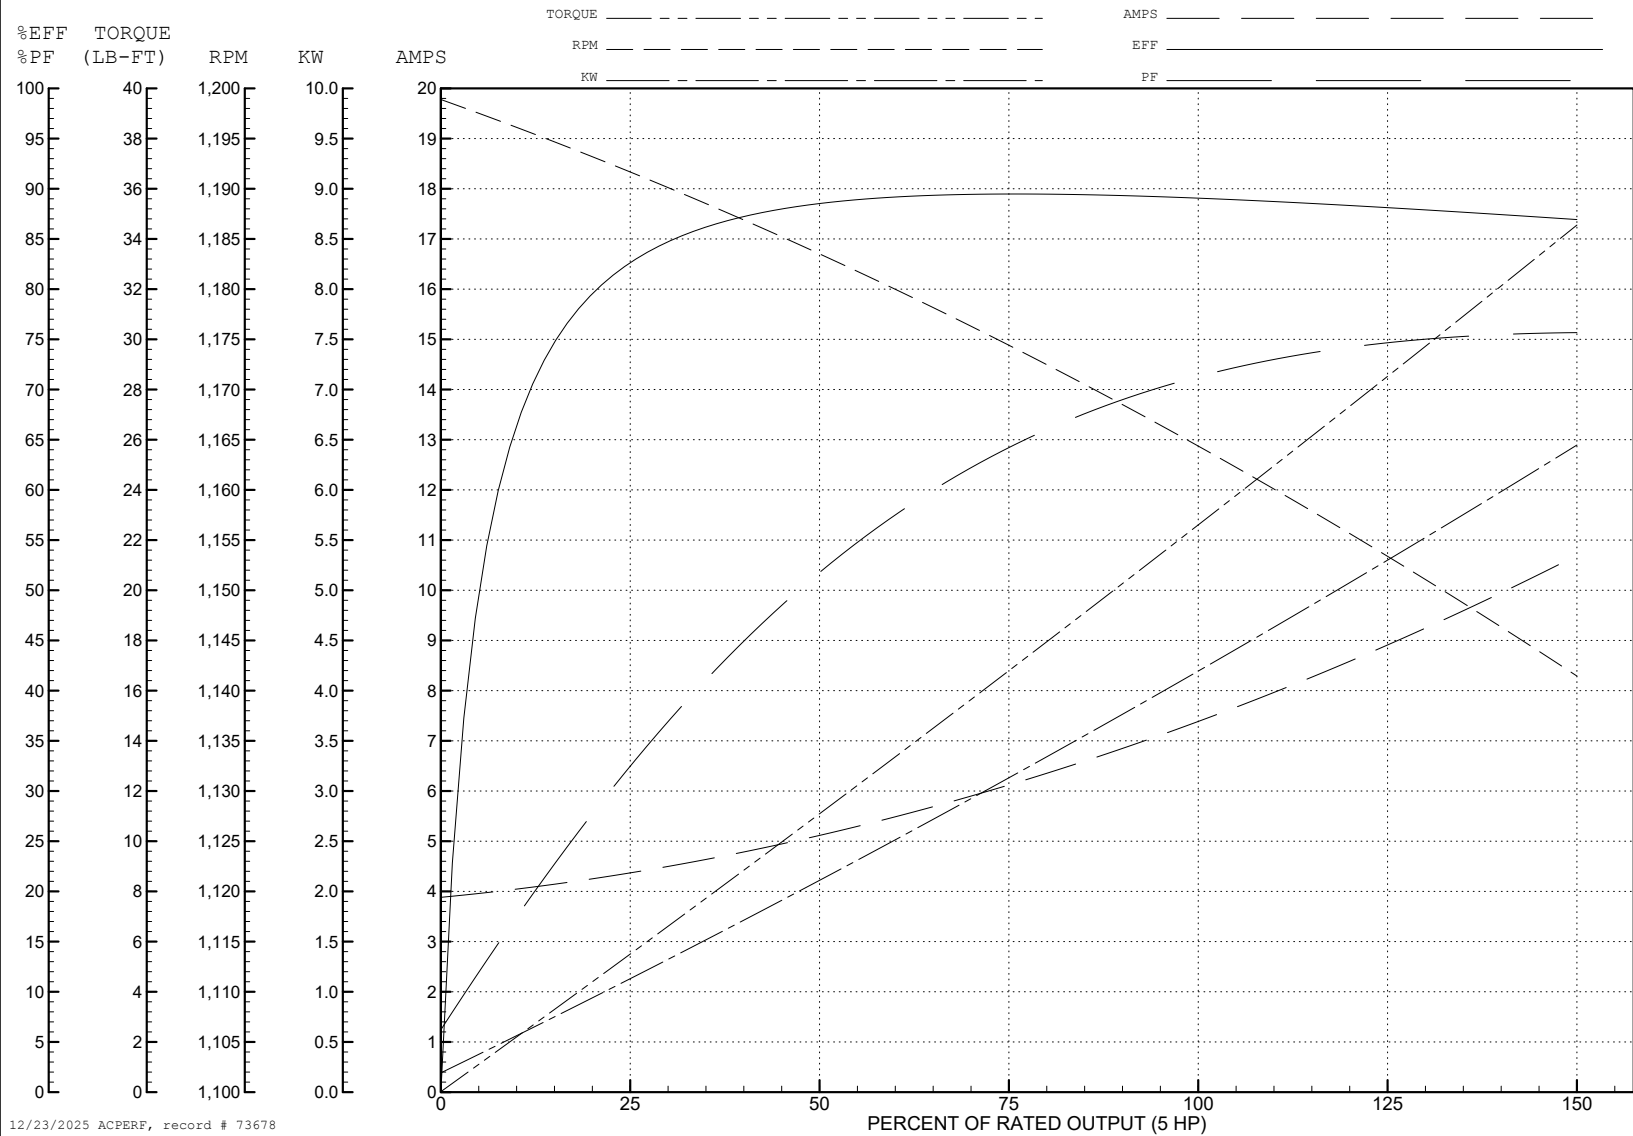


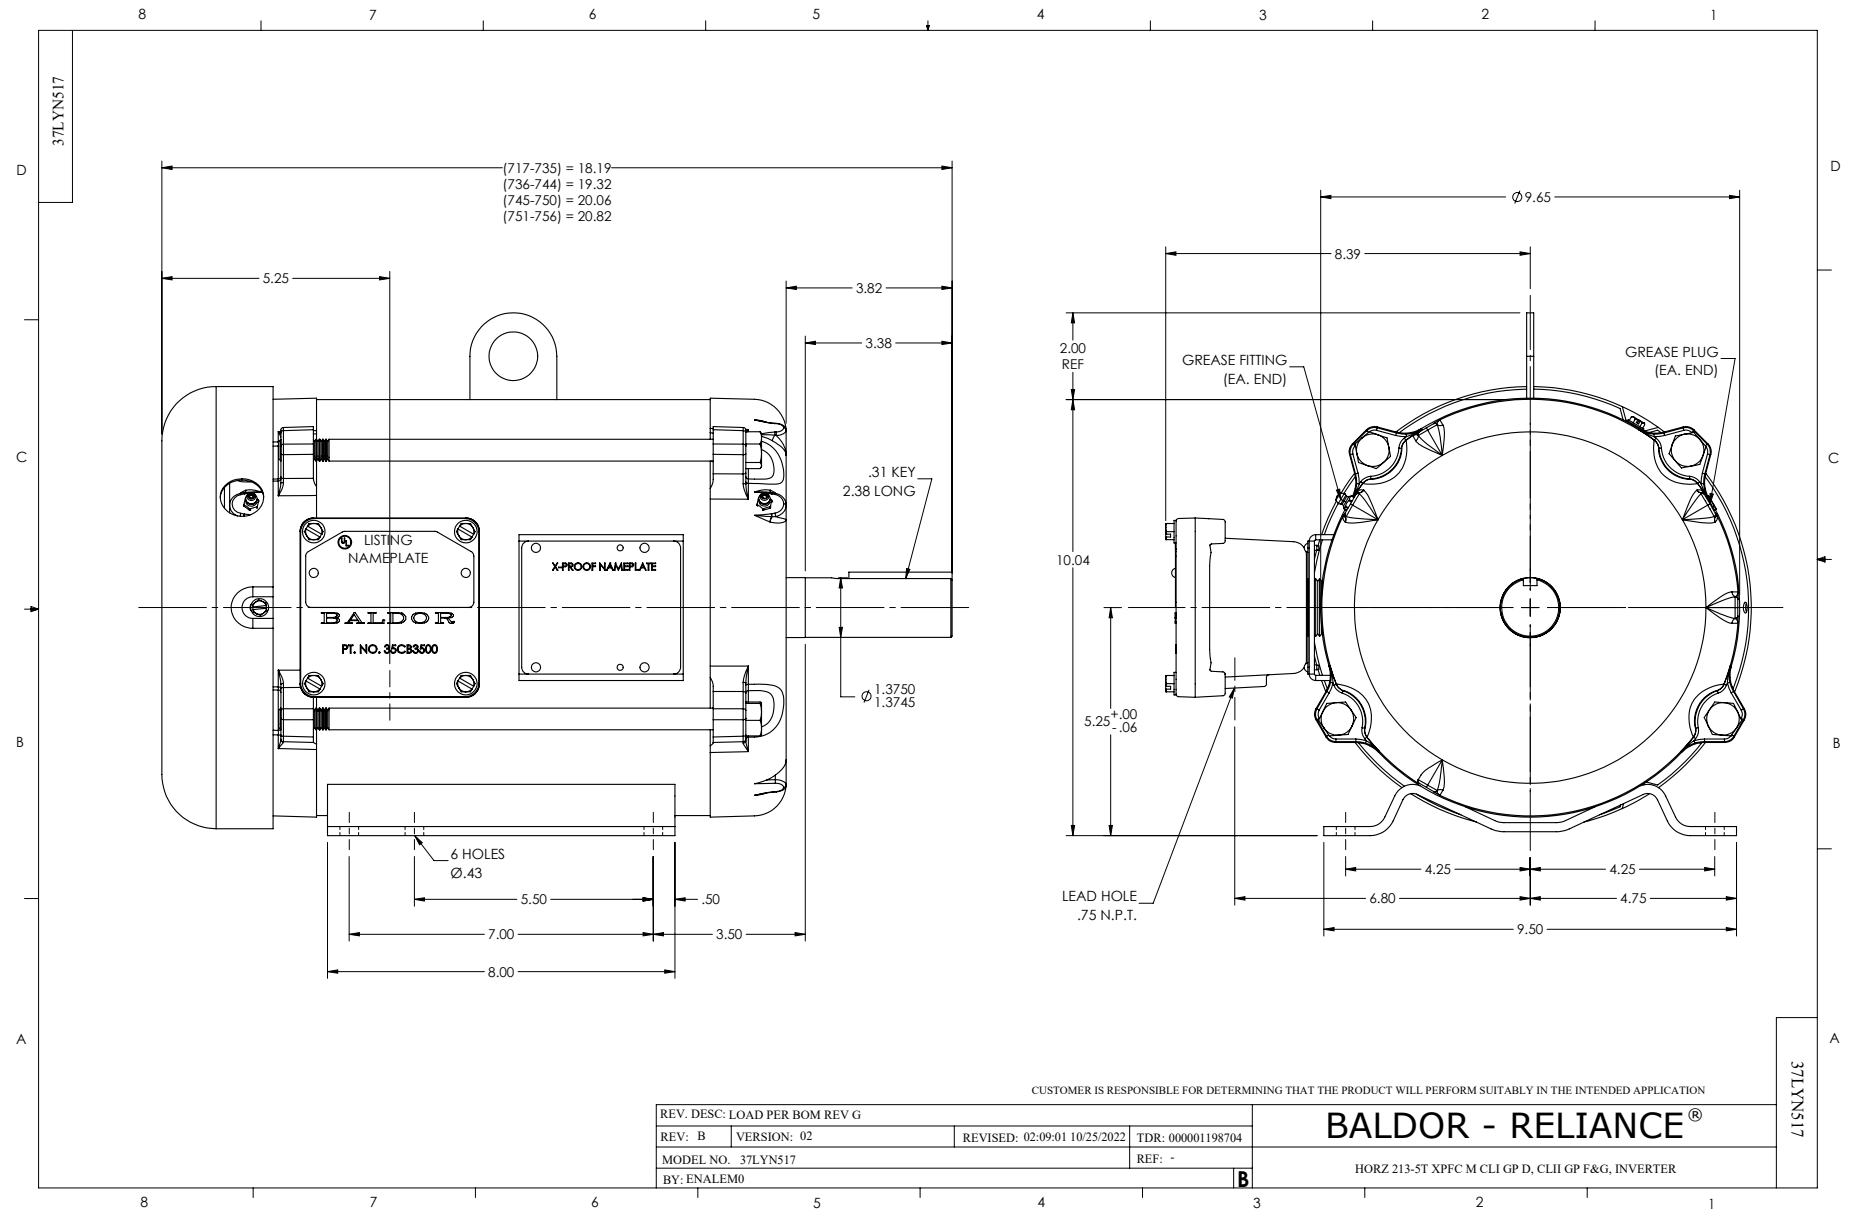

CD0005

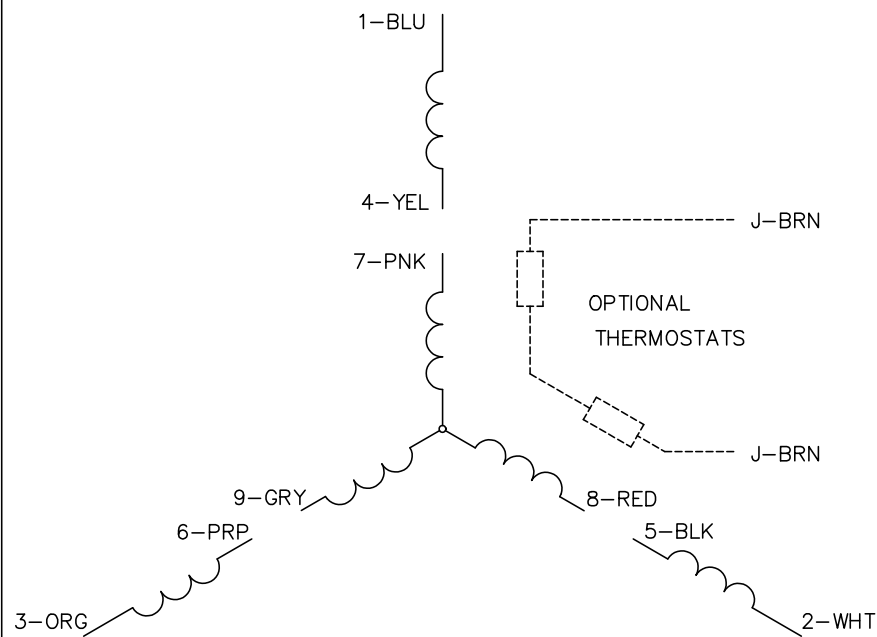


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005