



Customer information packet

XM21722T

7.5HP, 3520RPM, 3PH, 60HZ, 213T, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 50 HZ 7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 50 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	8.700 A @ 460.0 V 17.400 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	37WGR752
Layout	37LYN517
Eff. date	12-09-2021
CD Diagram	CD0005
Poles	02
Leads	9#14
Proprietary	False
Created date	04-22-2019

Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	8.7 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3728M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.19 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0887XPSLEV													
NO.						CC	010A						
S/N						TEMP CODE		T3C					
SPEC.	37-0000-0053					INV.TYPE		PWM					
CAT.NO.	XM21722T					C HP FR		60	C HP TO		90		
HP	7.5//5					CT HZ FROM		6		CT HZ TO		60	
VOLTS	230/460//190/380					VT HZ FROM		6		VT HZ TO		60	
AMPS	17.4/8.7				MAG CUR		6/3						
RPM	3520//2900				MX RPM		5400						
HZ	60//50	PH	3	CL	F	NOM.EFF.		89.5					
SER.F.	1.00	DES	B	SL HZ	1.3	WK2		0.255					
FRAME	213T	RATING		40C AMB-CONT									
	55C AMB @ 1.0 SF												
	1.15 SF ON SINEWAVE					NEMA MG-1 PT 5,IP54							

AC Induction Motor Performance Data

Record # 75638

Typical performance - not guaranteed values

Winding: 37WGR752-R001			Type: 3728M		Enclosure: XPFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5		Full Load Torque		10.9 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		17.4/8.7		Breakdown Torque		36.9 LB-FT	
R.P.M.		3520		Pull-up Torque		18.6 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		19.7 LB-FT	
NEMA Design Code		B		KVA Code	H	Starting Current	62.3 A
Service Factor (S.F.)		1.15		No-load Current		3.16 A	
NEMA Nom. Eff.		89.5		Power Factor	87	Line-line Res. @ 25°C	1.21 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	46°C
S.F. Amps						Temp. Rise @ S.F. Load	56°C
						Locked-rotor Power Factor	32.9
						Rotor inertia	0.255 LB-FT2

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	74	83	87	89	90	88
Efficiency	82	89	90.4	90.6	89.7	89.2	90.1
Speed	3579	3560	3537	3514	3488	3460	3498
Line amperes	3.74	4.97	6.71	8.67	10.8	13	9.95

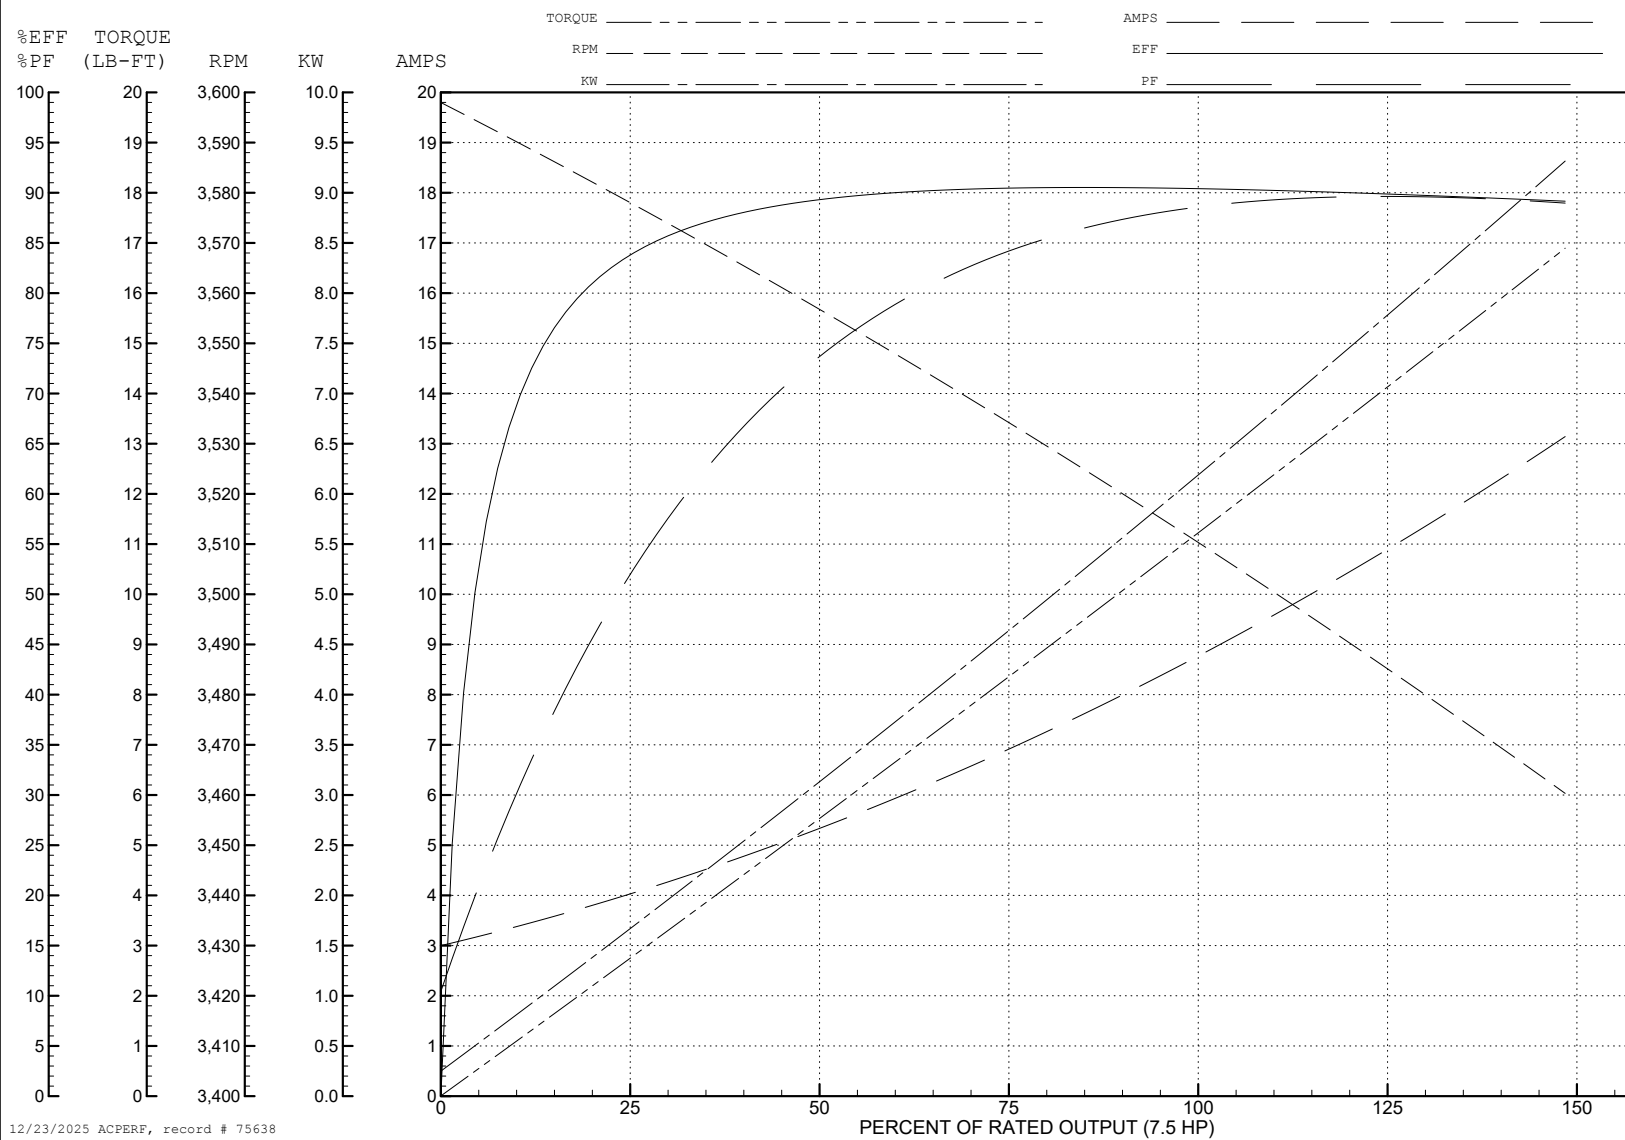
ABB Motors and Mechanical Inc.

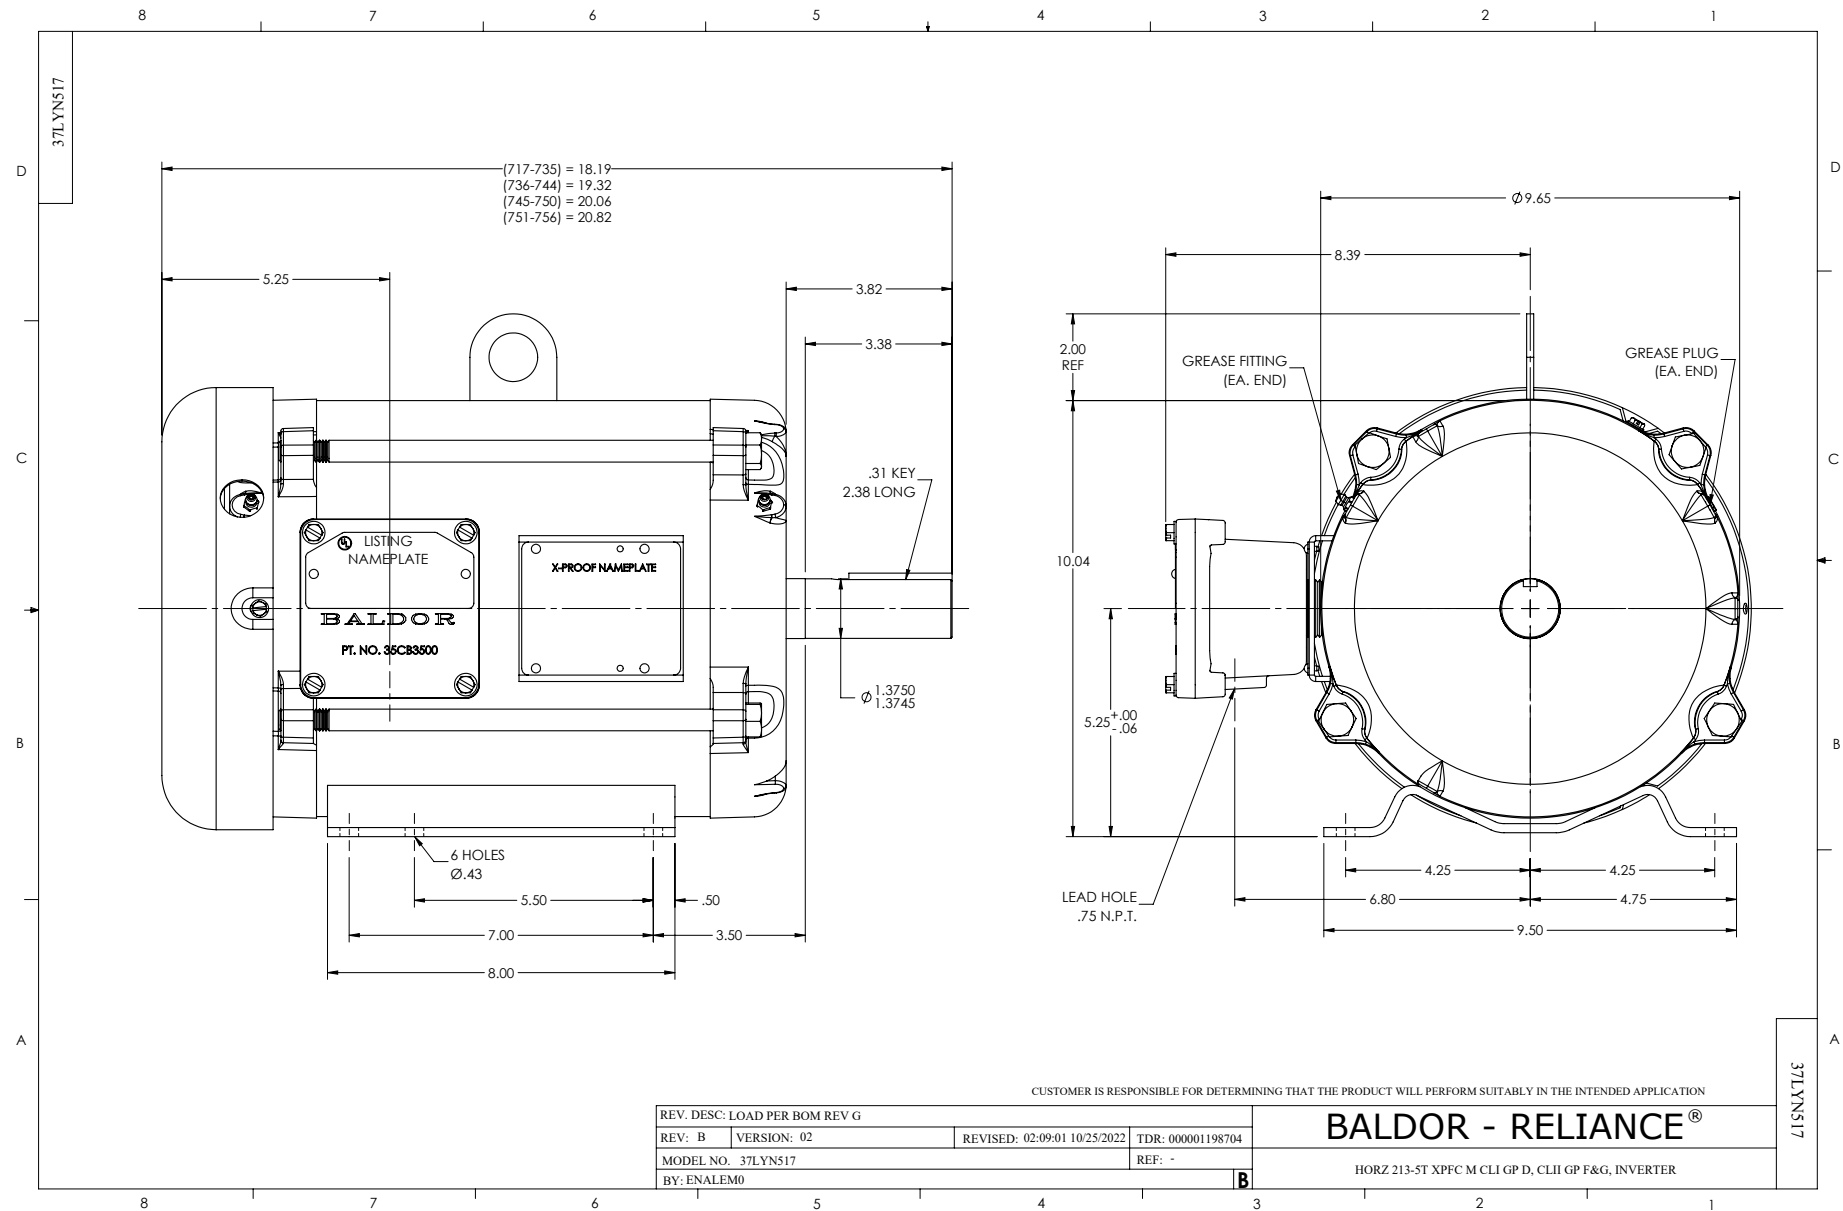
WINDING # 37WGR752

Typical performance - not guaranteed values.

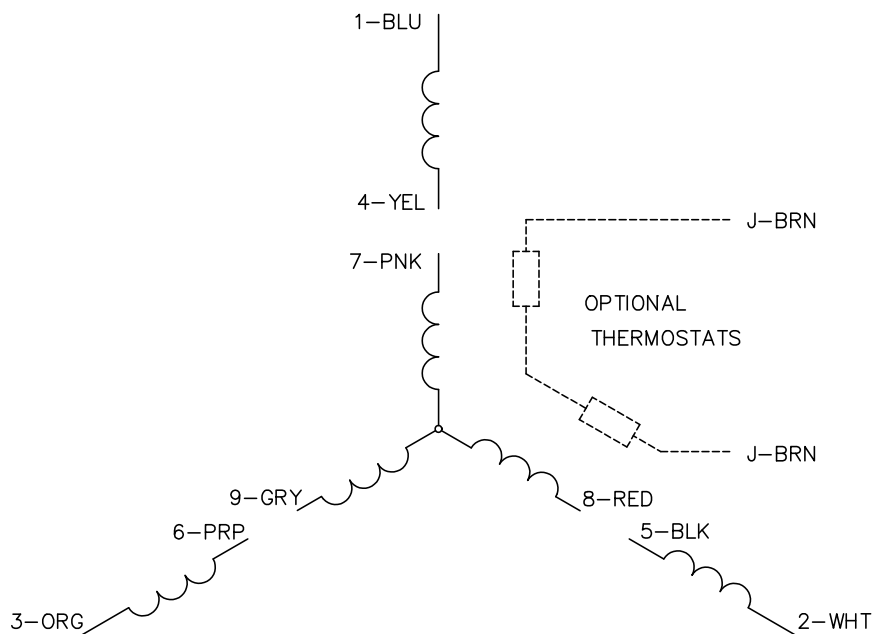

7.5 HP 3 PH 60 HZ 3520 RPM 460 V 3728M

TORQUES (LB-FT): PO=36.9 PU=18.6 LR=19.7 LRA=62.3






CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005