



Customer information packet

AOM3542

.75HP, 1725RPM, 3PH, 60HZ, 56, 3416M, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.500 A @ 208.0 V 3.200 A @ 230.0 V 1.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	T
Type	AC
Mech. spec.	34T045
Base	
Status	PRD/A
Elec. spec.	34WGW139
Layout	34LYT045
Eff. date	10-28-2024
CD Diagram	CD0005
Poles	04
Leads	9#18 36" LG Y
Proprietary	False
Created date	01-01-0001

Heater Indicator	No Heater
High Voltage Full Load Amps	1.6 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.25 IN
Power Factor	61
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Nameplate

NP1256L									
CAT.NO.	AOM3542								
SPEC.	34T45W139								
HP	.75 AIR OVER								
VOLTS	208-230/460								
AMP	3.5-3.2/1.6								
RPM	1725								
FRAME	56		HZ	60		PH	3		
SER.F.	1.00	CODE	K	DES	B	CLASS	F		
NEMA-NOM-EFF	72	PF	61						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEAO	SN							
	1000 FPM AT 44 CFM								

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 6895

Typical performance - not guaranteed values

Winding: 34WGW139-R001			Type: 3416M		Enclosure: TEAO		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.75 AIR OVER	Full Load Torque		2.25 LB-FT		
Volts		208-230/460	Start Configuration		direct on line		
Full Load Amps		3.5-3.2/1.6	Breakdown Torque		8.3 LB-FT		
R.P.M.		1725	Pull-up Torque		6.3 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		8 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		8.3 A
Service Factor (S.F.)		1		No-load Current		1.39 A	
NEMA Nom. Eff.		72	Power Factor	61	Line-line Res. @ 25°C		23.7 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		80°C	
				Locked-rotor Power Factor		65	
				Rotor inertia		0.0381 LB-FT2	

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	27	39	50	59	67	73
Efficiency	46	61	68	71	72	71
Speed	1778	1759	1738	1716	1691	1663
Line amperes	1.41	1.45	1.54	1.66	1.81	2.01


ABB Motors and Mechanical Inc.

WINDING # 34WGW139



Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3416M

TORQUES (LB-FT) : PO=8.3 PU=6.3 LR=8 LRA=8.3

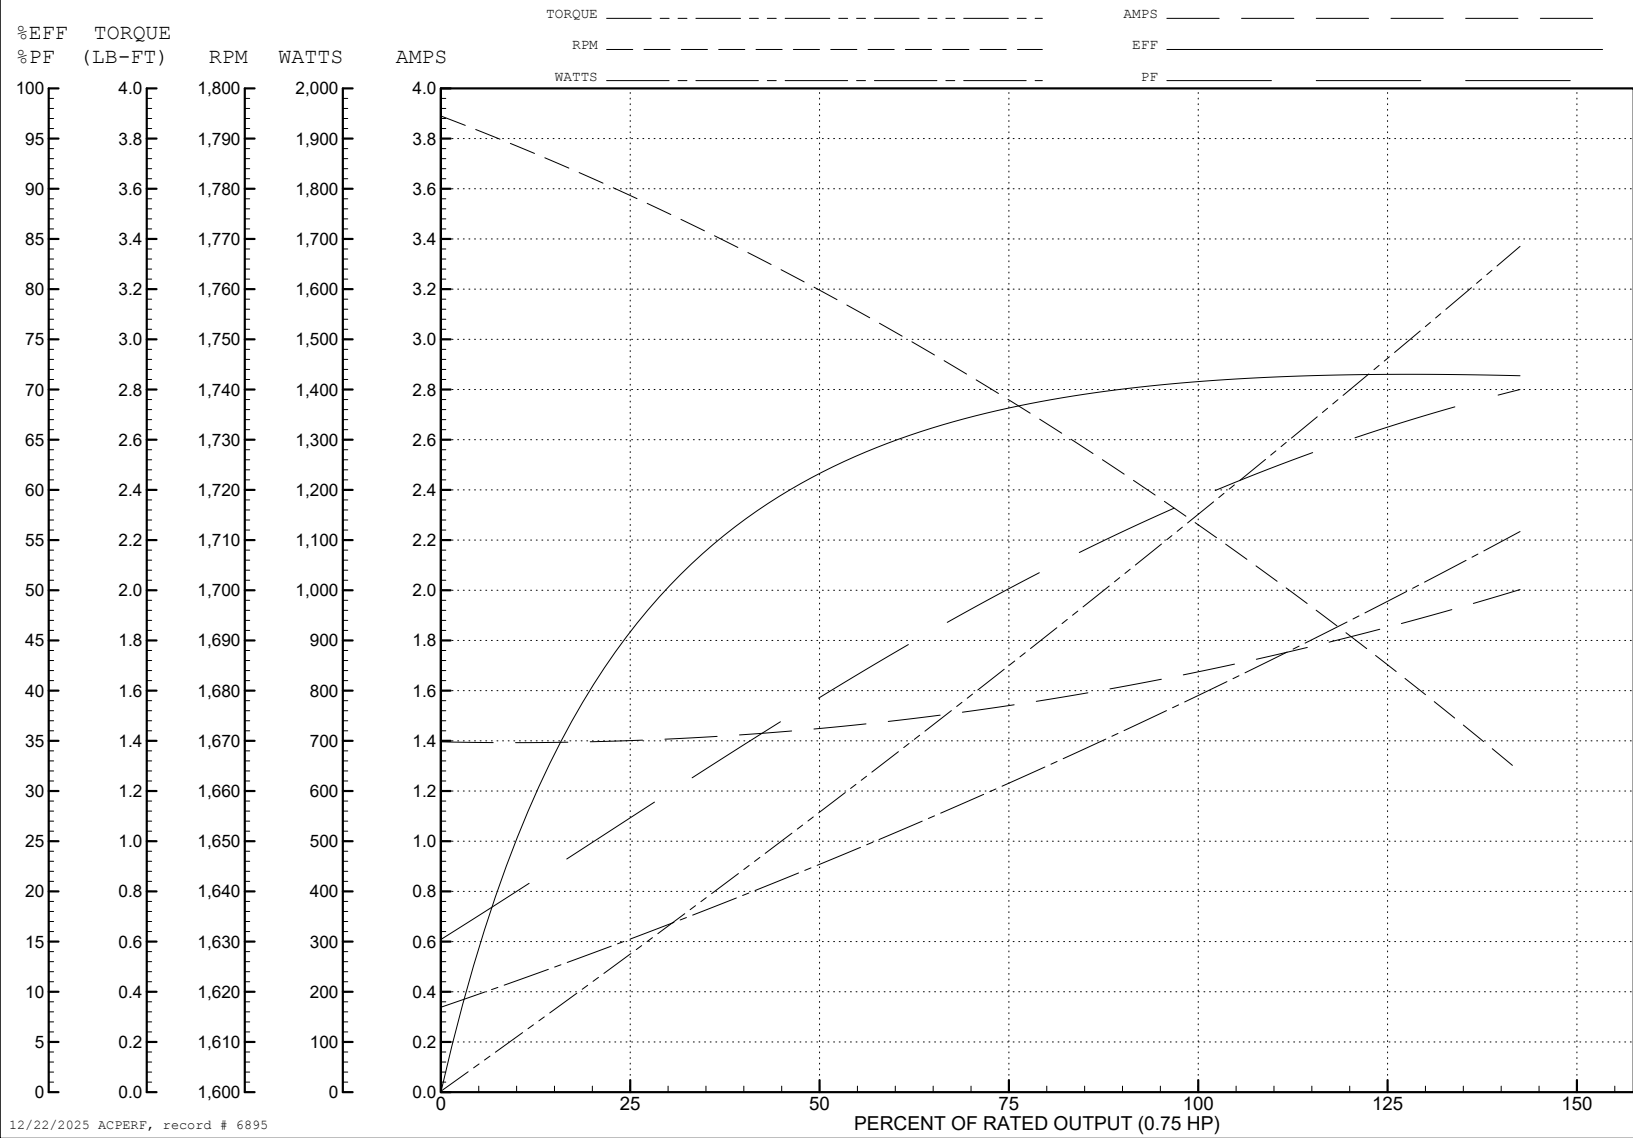

34LYT045

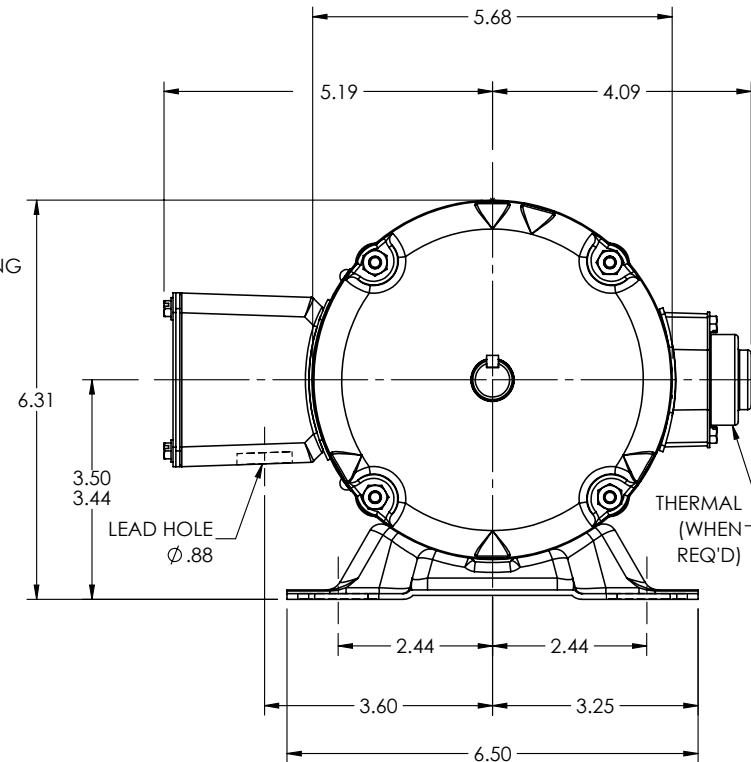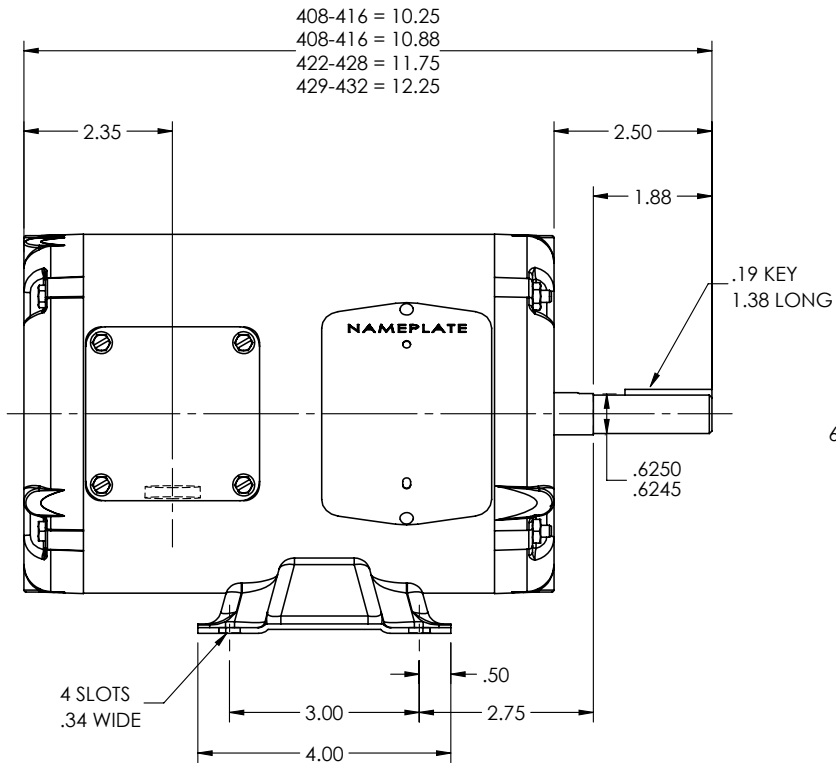

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: LOAD TO SOLIDWORKS - REV D

REV: E

VERSION: 02

REVISED: 03:33:19 01/03/2023

TDR: 000001201165

34LYT045

MODEL NO. 34LYT045

REF: -

BY: ENFRAJ0

BALDOR - RELIANCE®

STD HORZ MODEL 34M NEMA 56 TEAO

34LYT045

