



Customer information packet

CECP83586T-4

2HP, 3490RPM, 3PH, 60HZ, 145TC, 0526M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	145TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.8
Current @ Voltage	2.440 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	Q
Type	AC
Mech. spec.	05E943
Base	
Status	PRD/A
Elec. spec.	05WGX123
Layout	05LYE943
Eff. date	12-30-2024
CD Diagram	CD0006
Poles	02
Leads	3#18,0#,0#,0# Y
Proprietary	False
Created date	07-05-2016

Haz Area Temp Code	T4
Heater Indicator	No Heater
High Voltage Full Load Amps	2.4 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	@ 0 AWG 3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0526M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.38 IN
Power Factor	88
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3490 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4328											
CAT.NO.	CECP83586T-4										
SPEC.	05E943X123G1										
HP	2 TE				IP	56					
VOLTS	460										
AMPS	2.44										
R.P.M.	3490										
FRAME	145TC		HZ		60		PH	3			
SER.F.	1.15	CODE	L	DES.	B	CLASS		F			
RATING	40C AMB-CONT										
SN											
DE	6205		ODE		6205						
NEMA NOM. EFF.	85.5		P.F.		88						
GUAR. MIN. EFF.	82.5		CC	010A							
T. CODE	T4		TEMP=		135						

NP3186

SPEC.	05E943X123G1				
ABMA DE BRG	25BC02X30X				
ABMA ODE BRG	25BC02X30X				
GREASE	POLYREX EM				
MOTOR WEIGHT	80	ROTOR BARS	20	STATOR BARS	24
MAX. R.P.M.	5400	MAX. KVAR	0.1		
INV.TYPE	PWM				
T=	135				
CHP	60	TO	90		
CT	1.8	TO	60		
VT	-0	TO	60		
HTR-VOLTS	N/A	HTR-AMPS	N/A		
HTR-WATTS	N/A	MAX. SPACE HEATER TEMP.			N/A

AC Induction Motor Performance Data

Record # 92393

Typical performance - not guaranteed values

Winding: 05WGX123-R004			Type: 0526M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		2	Full Load Torque		2.98 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		2.5	Breakdown Torque		14.2 LB-FT			
R.P.M.		3490	Pull-up Torque		6.33 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		11.2 LB-FT		
NEMA Design Code		B	KVA Code	M	Starting Current		25 A	
Service Factor (S.F.)		1.15	No-load Current		0.912 A			
NEMA Nom. Eff.		85.5	Power Factor		88	Line-line Res. @ 25°C		6.88 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		44°C		
S.F. Amps				Temp. Rise @ S.F. Load		52°C		
				Locked-rotor Power Factor		49.9		
				Rotor inertia		0.0719 lb-ft²		

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	55	75	84	88	90	91	89
Efficiency	73.4	83.6	85.8	85.5	85.8	84.7	86
Speed	3572	3547	3520	3492	3461	3426	3473
Line amperes	1.1	1.47	1.93	2.44	3	3.61	2.78


ABB Motors and Mechanical Inc.


WINDING # 05WGX123

Typical performance - not guaranteed values.



2 HP 3 PH 60 HZ 3490 RPM 460 V 0526M

TORQUES (LB-FT): PO=14.2 PU=6.33 LR=11.2 LRA=25

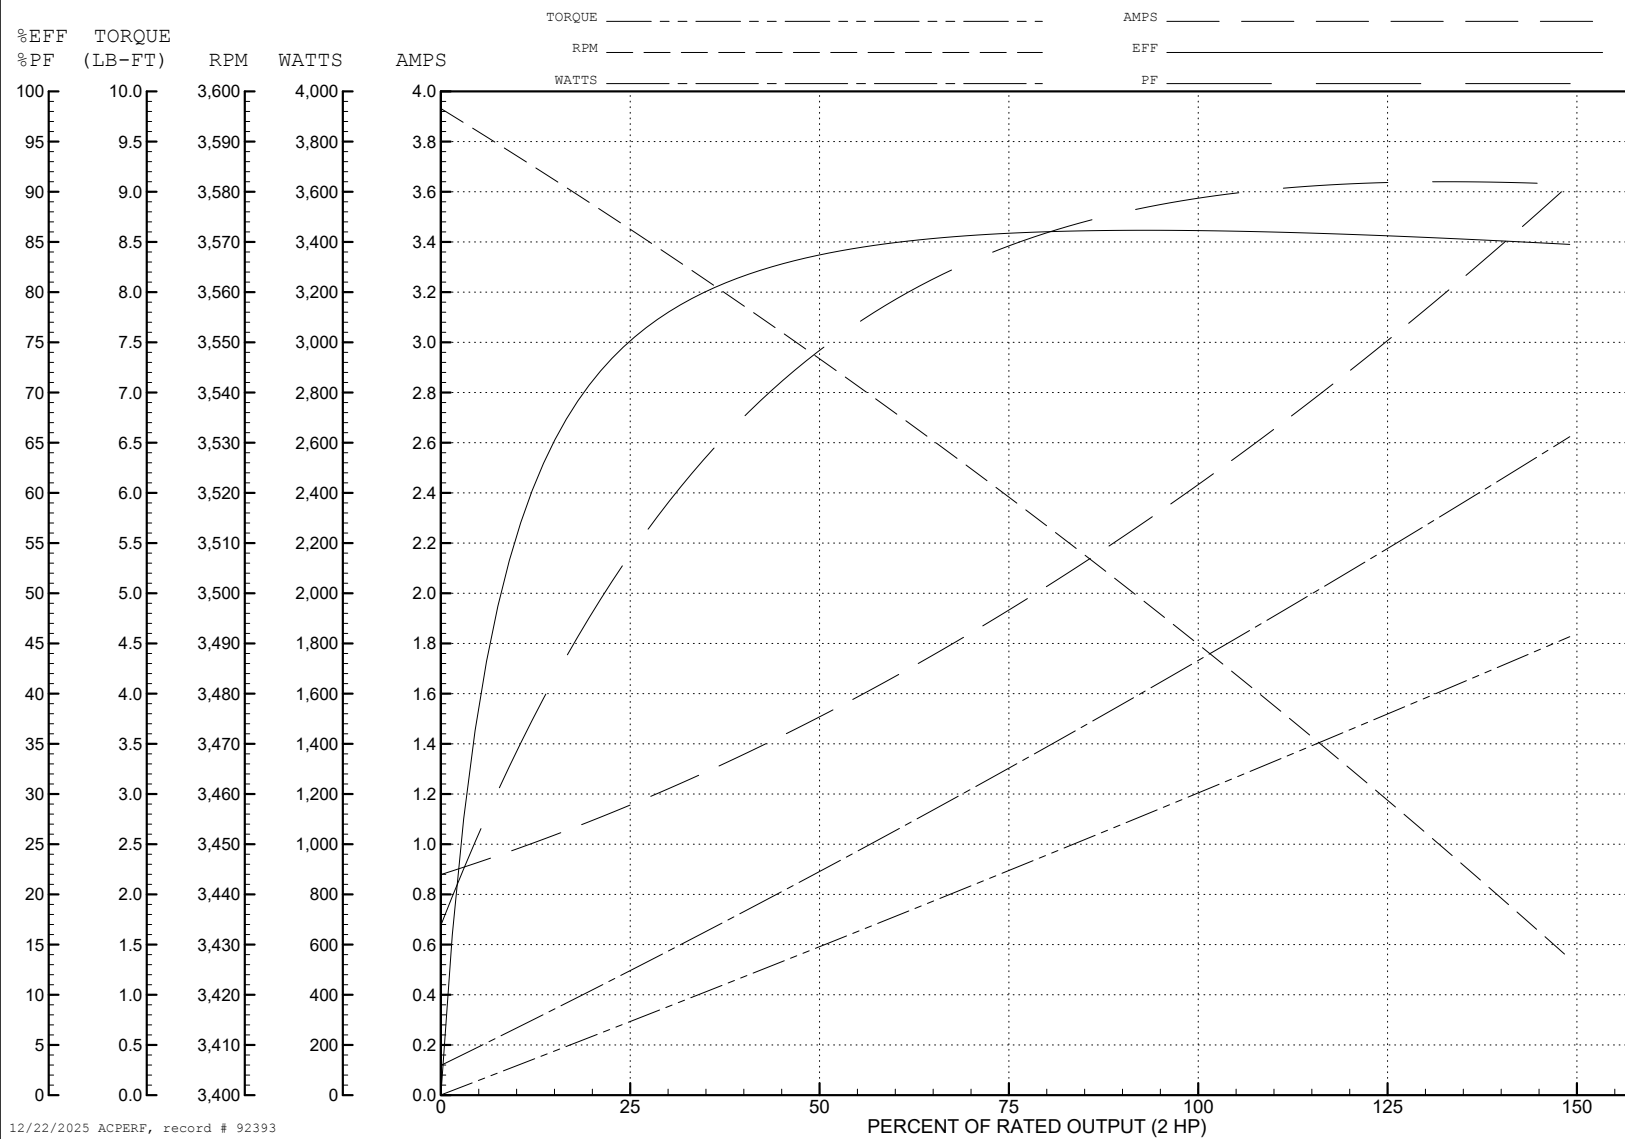

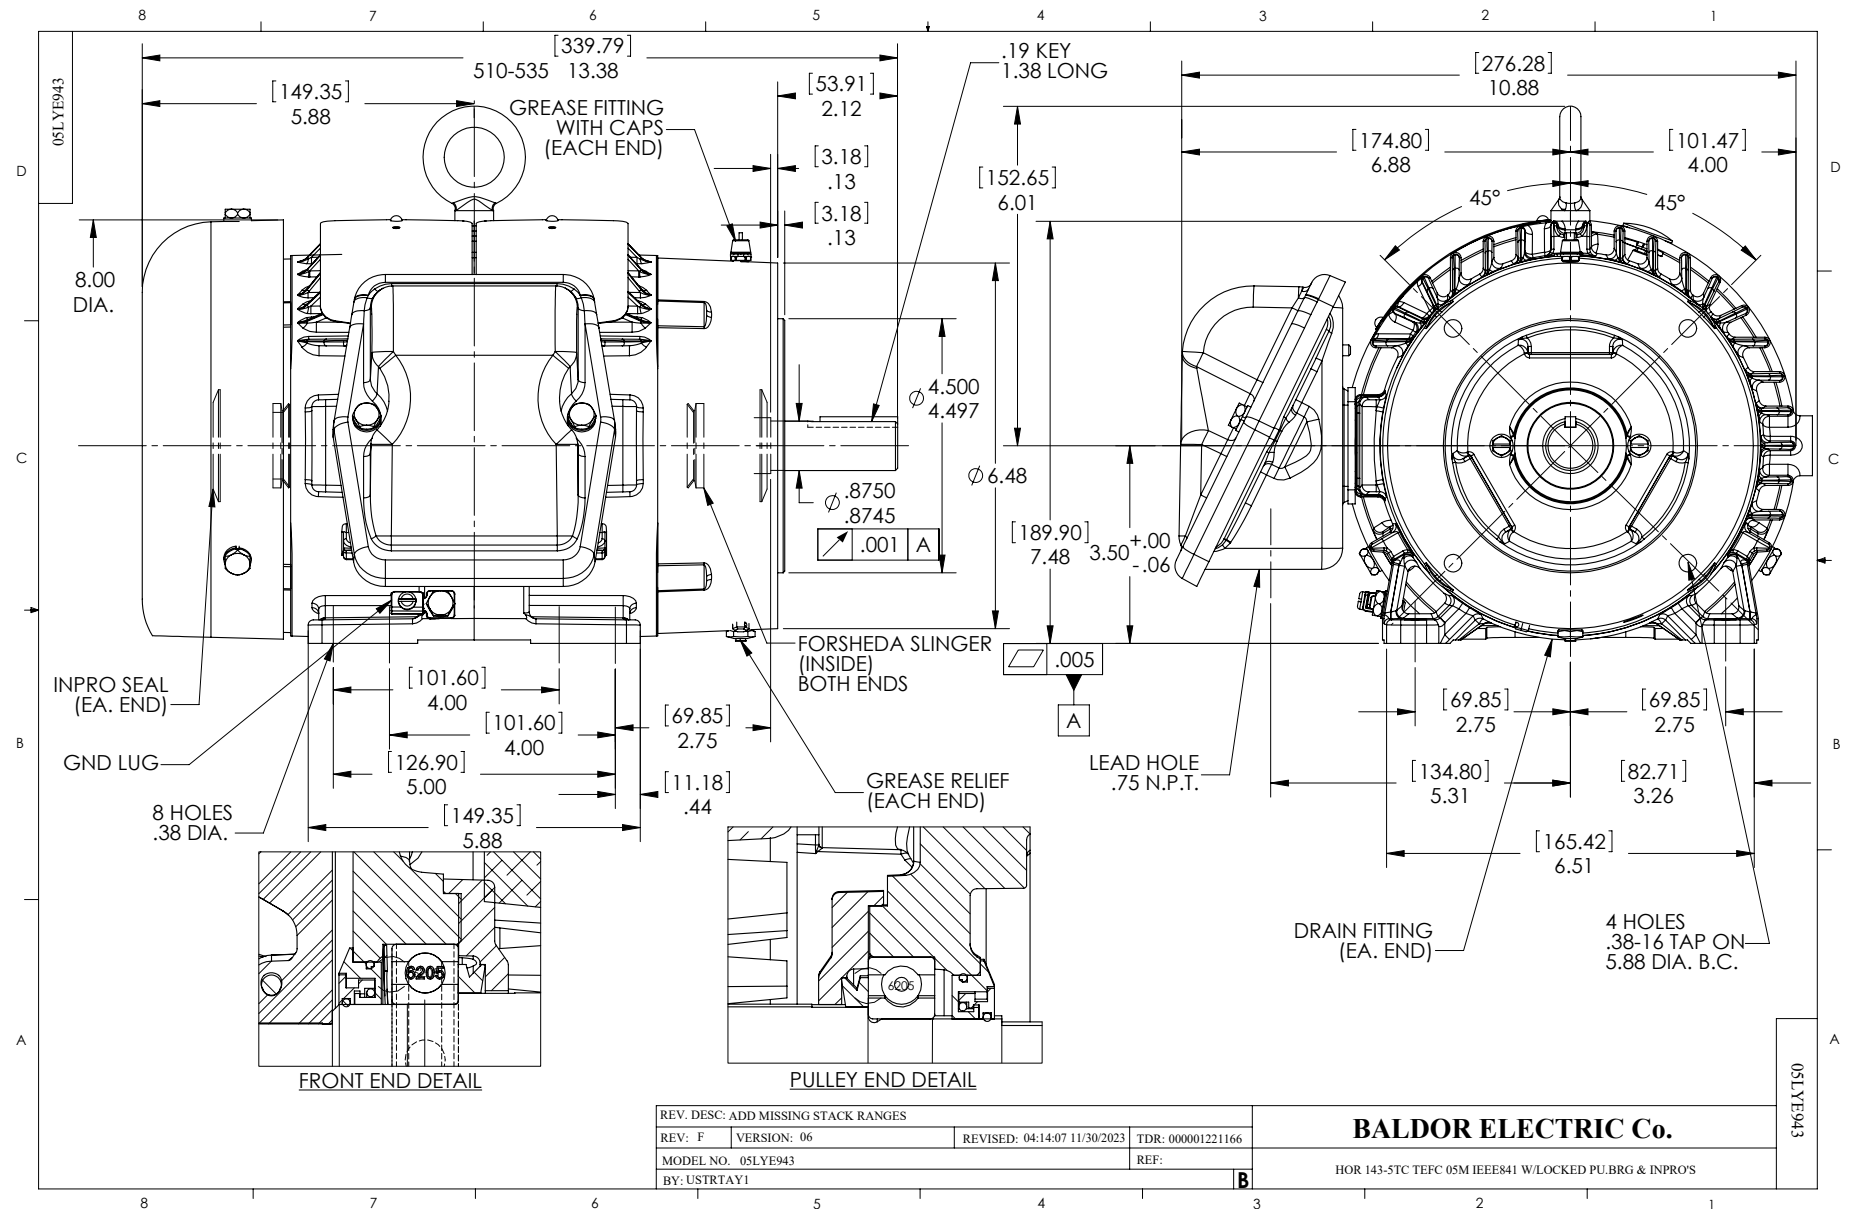

CD0006

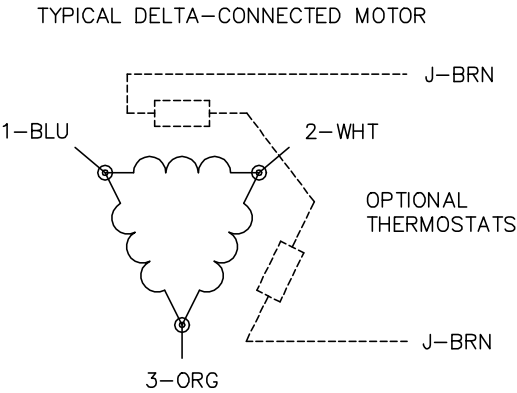

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1