



Customer information packet

CECP83771T-4

10HP, 3475RPM, 3PH, 60HZ, 215TC, 0742M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	215TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	11.300 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	AB
Type	AC
Mech. spec.	07M320
Base	
Status	PRD/A
Elec. spec.	07WGY930
Layout	07LYM320
Eff. date	10-01-2025
CD Diagram	CD0006
Poles	02
Leads	3#14
Proprietary	False
Created date	08-21-2012

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	11.3 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0742M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	20.23 IN
Power Factor	91
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4328									
CAT.NO.	CECP83771T-4								
SPEC.	07M320Y930G1								
HP	10 TE				IP	56			
VOLTS	460								
AMPS	11.3								
R.P.M.	3500								
FRAME	215TC		HZ		60		PH	3	
SER.F.	1.15	CODE	H	DES.	B	CLASS F			
RATING	40C AMB-CONT								
SN									
DE	6307		ODE		6307				
NEMA NOM. EFF.	91		P.F.		91				
GUAR. MIN. EFF.	89.5		CC	010A					
T. CODE	T3C		TEMP=		160				

NP3186

SPEC.	07M320Y930G1				
ABMA DE BRG	35BC03X30X				
ABMA ODE BRG	35BC03X30X				
GREASE	POLYREX EM				
MOTOR WEIGHT	225	ROTOR BARS	28	STATOR BARS	36
MAX. R.P.M.	5400	MAX. KVAR	N/A		
INV.TYPE	PWM				
T=	160				
CHP	60	TO	90		
CT	6	TO	60		
VT	3	TO	60		
HTR-VOLTS	N/A	HTR-AMPS	N/A		
HTR-WATTS		MAX. SPACE HEATER TEMP.			N/A

AC Induction Motor Performance Data

Record # 47355

Typical performance - not guaranteed values

Winding: 07WGY930-R013			Type: 0742M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		10		Full Load Torque		14.8 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		11.3		Breakdown Torque		67.3 LB-FT	
R.P.M.		3500		Pull-up Torque		22.4 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		29 LB-FT	
NEMA Design Code		B	KVA Code	H	Starting Current		81 A
Service Factor (S.F.)		1.15		No-load Current		3.11 A	
NEMA Nom. Eff.		91	Power Factor	91	Line-line Res. @ 25°C		0.791 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C	
S.F. Amps				Temp. Rise @ S.F. Load		62°C	
				Locked-rotor Power Factor		30.3	
				Rotor inertia		0.383 LB-FT2	

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	64	81	88	89	91	90	91
Efficiency	89.1	92.2	92.3	91.6	90.3	89.1	90.9
Speed	3576	3554	3530	3504	3474	3442	3486
Line amperes	4.08	6.21	8.61	11.3	14.1	17.4	13


ABB Motors and Mechanical Inc.

WINDING # 07WGY930

Typical performance - not guaranteed values.

10 HP 3 PH 60 HZ 3500 RPM 460 V 0742M

TORQUES (LB-FT): PO=67.3 PU=22.4 LR=29 LRA=81

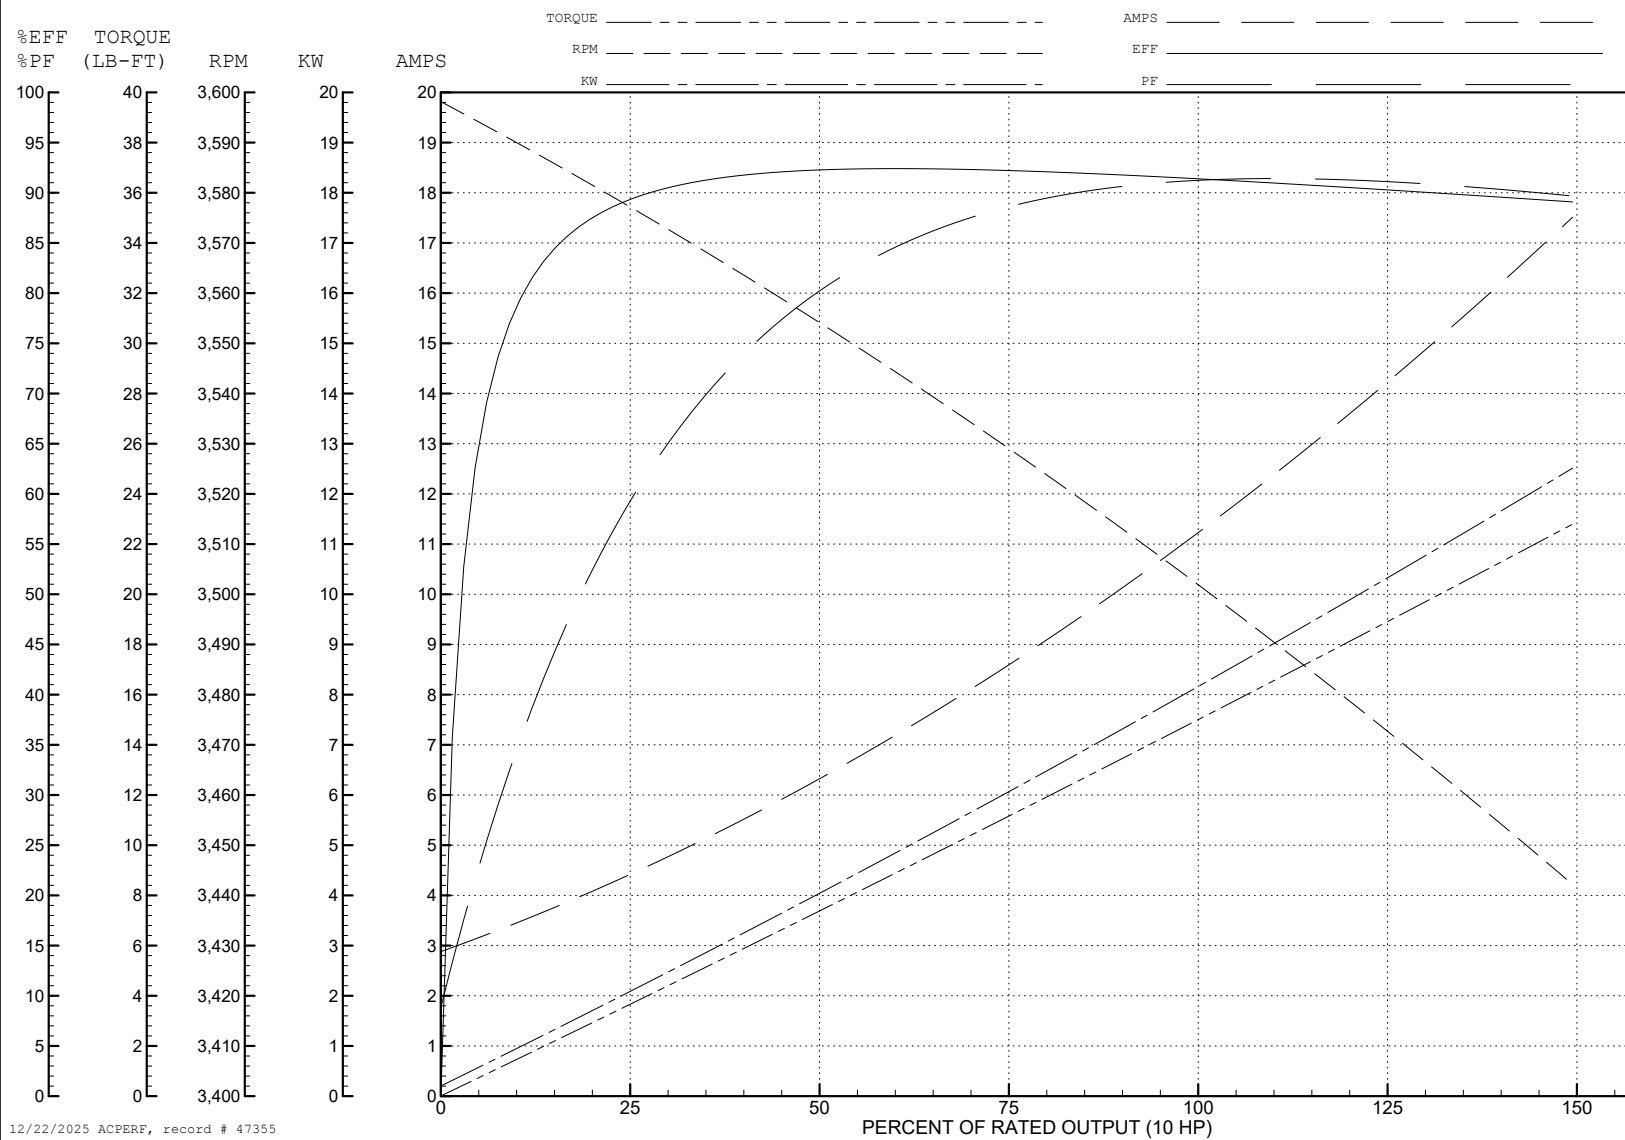

AC Induction Motor Performance Data

Record # 65135

Typical performance - not guaranteed values

Winding: 07WGY930-R013				Type: 0742M		Enclosure: TEFC			
Nameplate Data				368 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		10		Full Load Torque		15.02 LB-FT			
Volts		460		Start Configuration		direct on line			
Full Load Amps		11.3		Breakdown Torque		42.64 LB-FT			
R.P.M.		3500		Pull-up Torque		14.18 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		18.36 LB-FT			
NEMA Design Code		B		KVA Code	H		Starting Current	64.41 A	
Service Factor (S.F.)		1.15		No-load Current		2.43 A			
NEMA Nom. Eff.		91		Power Factor		91		Line-line Res. @ 25°C	0.791 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		66°C	
S.F. Amps						Temp. Rise @ S.F. Load		87°C	
						Locked-rotor Power Factor		30.1	
						Rotor inertia		0.383 LB-FT2	

Load Characteristics 368 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	79	89	91	90	90	86	90
Efficiency	90.5	92.3	91.4	89.7	87.4	84.6	88.3
Speed	3565	3532	3495	3453	3401	3335	3422
Line amperes	4.09	7.1	10.43	14.25	18.44	23.94	16.8


ABB Motors and Mechanical Inc.


WINDING # 07WGY930

Typical performance - not guaranteed values.




10 HP 3 PH 60 HZ 3500 RPM 368 V 0742M

TORQUES (LB-FT): PO=42.64 PU=14.18 LR=18.36 LRA=64.41

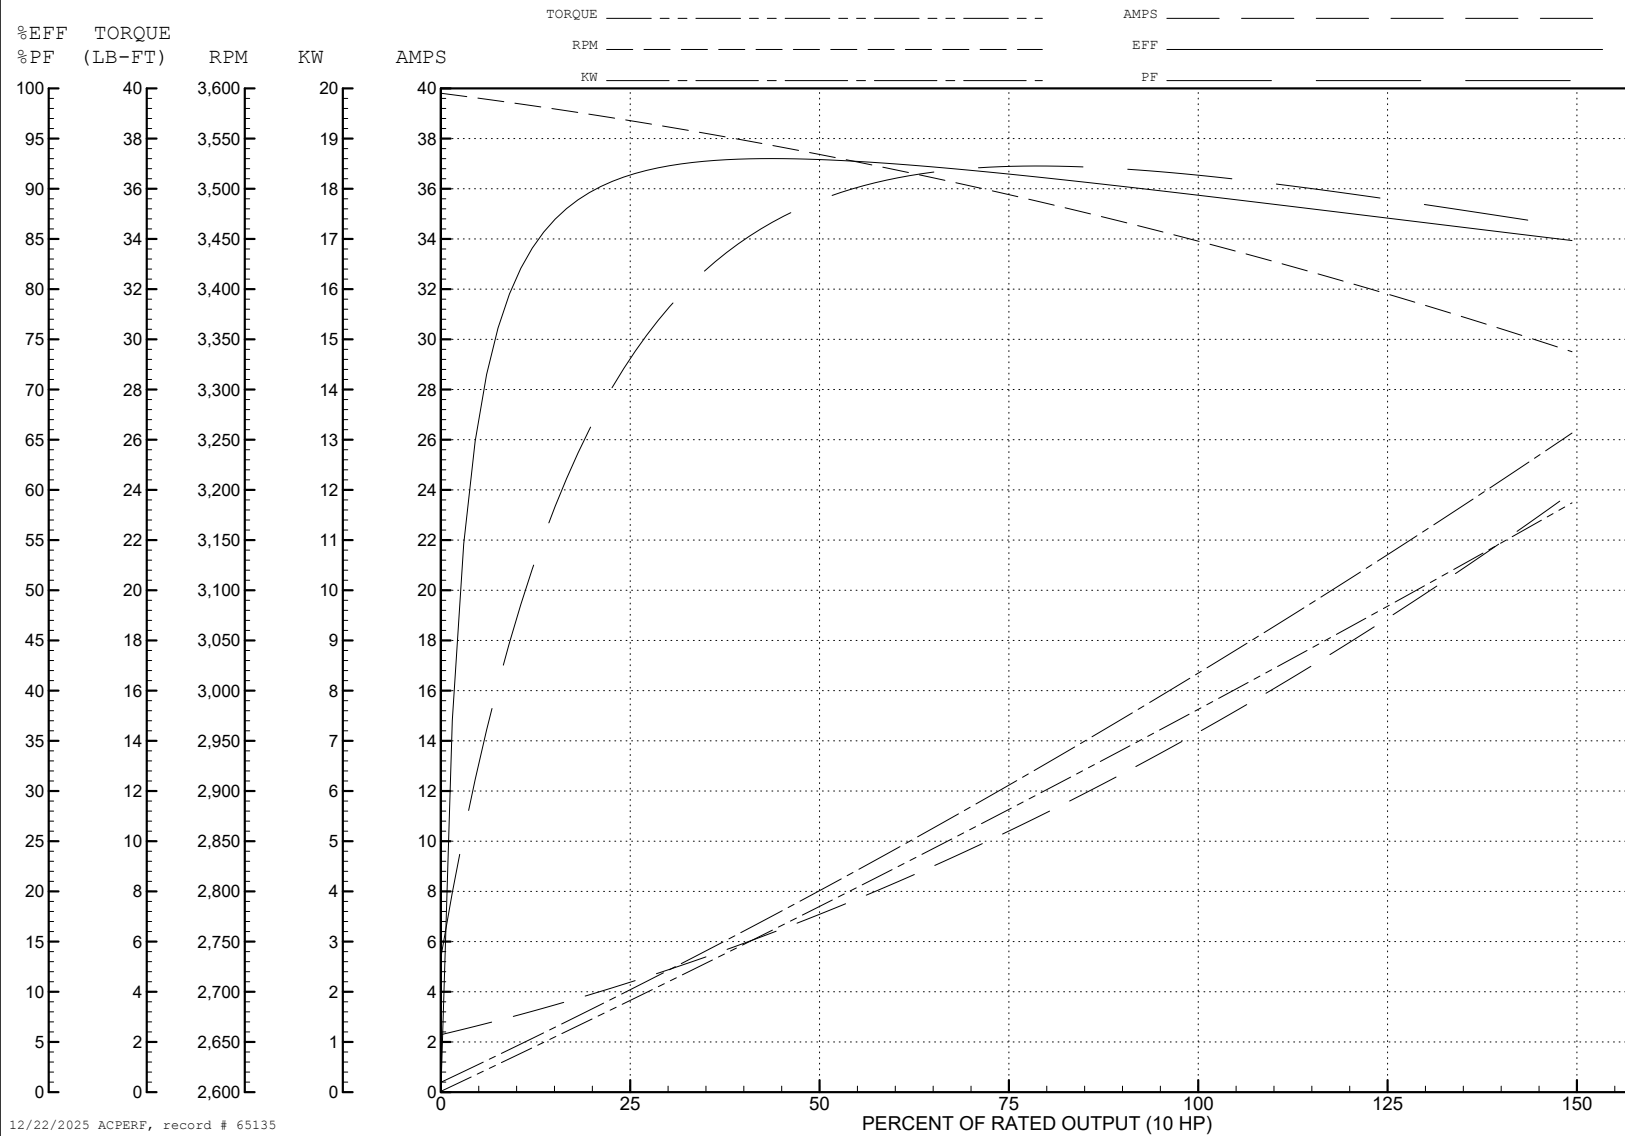

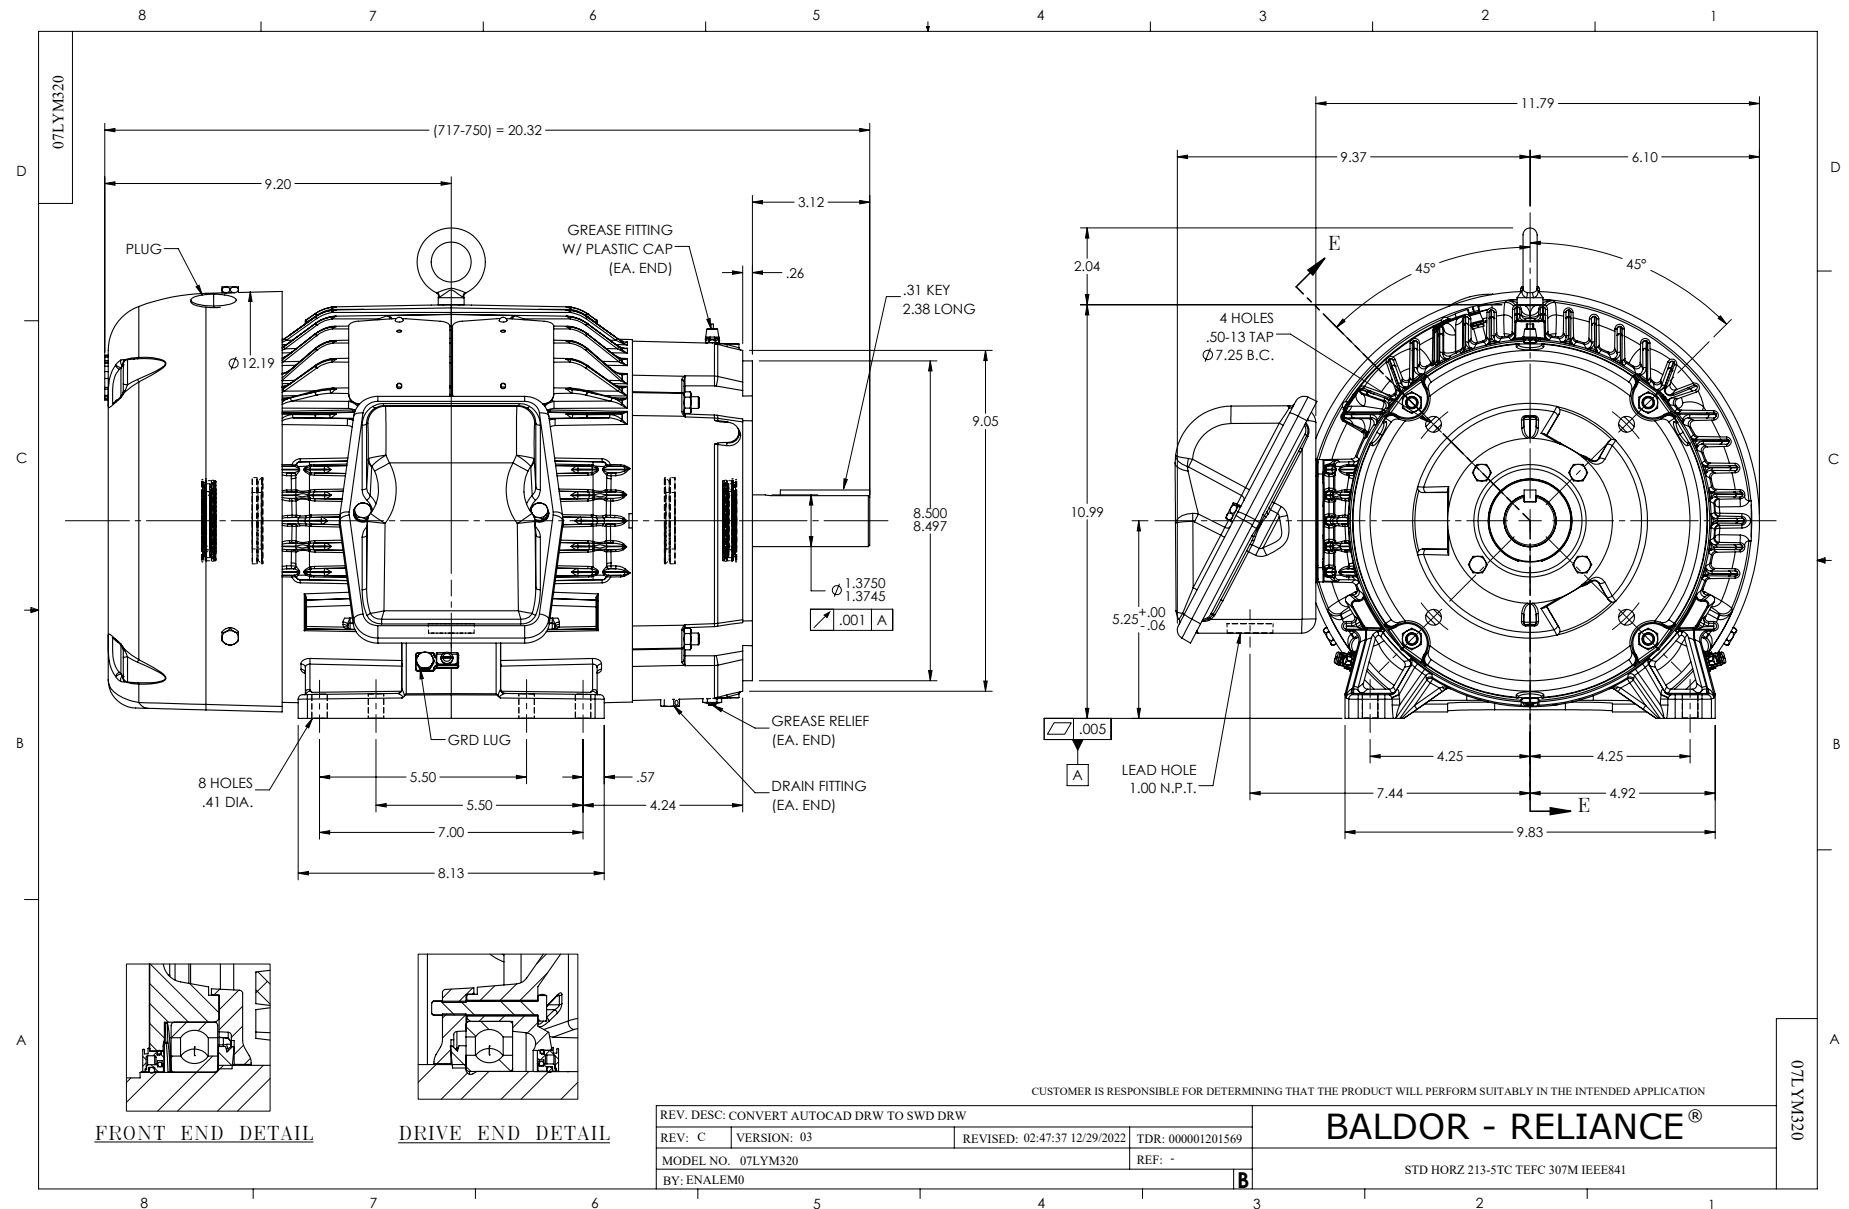

CD0006

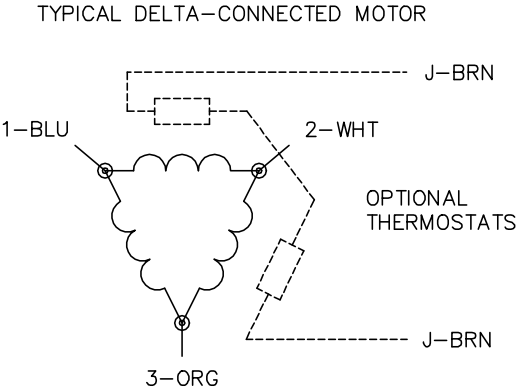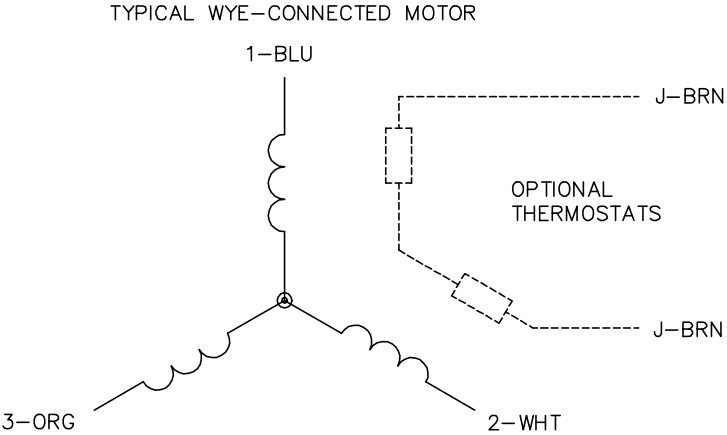

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1