



Customer information packet

EBM3710T-D

7.5HP, 1770RPM, 3PH, 60HZ, 213T, 3738M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CE CURUSEEV NEMA PREMIUM UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.500 A @ 460.0 V 20.000 A @ 208.0 V 19.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	D
Type	AC
Mech. spec.	37M908
Base	
Status	PRD/A
Elec. spec.	37WGL864
Layout	37LYM908
Eff. date	09-30-2024
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	02-01-2021

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3738M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	25.37 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2934L							
CAT.NO.	EBM3710T-D						
SPEC.	37M908L864G1						
HP	7.5/5.59KW IP44						
VOLTS	230/460 IC411						
AMP	19/9.5 77KG						
R.P.M. (1/MIN)	1770						
FRAME	213T		HZ	60		PH	3
SER.F.	1.15		CODE	J		DES	A
						CL	F
NEMA-NOM-EFF	91.7		PF	80			
RATING	40C AMB-CONT						
CC	010A						
DE	6307		ODE	6206			
ENCL	TEFC		SN				
	IE3-92(75%)91.4(50%)						

AC Induction Motor Performance Data

Record # 85467

Preliminary Data Sheet

Winding: 37WGL864-R001				Type: 3738M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		7.5		Full Load Torque		22.2 LB-FT		
Volts		230/460		Start Configuration		direct on line		
Full Load Amps		19.0/9.5		Breakdown Torque		69.8 LB-FT		
R.P.M.		1770		Pull-up Torque		31.5 LB-FT		
Hz		60 Phase		3		Locked-rotor Torque		41 LB-FT
NEMA Design Code		A KVA Code		J		Starting Current		70.7 A
Service Factor (S.F.)		1.15		No-load Current		4.32 A		
NEMA Nom. Eff.		91.7 Power Factor		80		Line-line Res. @ 25°C		1.48 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		64°C		
S.F. Amps		21.4/10.7		Temp. Rise @ S.F. Load		84°C		
				Locked-rotor Power Factor		41.9		
				Rotor inertia		0.934 lb-ft²		

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	80	83	84	83
Efficiency	87.1	91.4	92	91.7	90.7	89.6	90.7
Speed	1793	1786	1778	1770	1760	1750	1761
Line amperes	4.83	6.03	7.64	9.5	11.6	13.9	10.7


ABB Motors and Mechanical Inc.


WINDING # 37WGL864

Typical performance - not guaranteed values.


7.5 HP 3 PH 60 HZ 1770 RPM 460 V 3738M

TORQUES (LB-FT): PO=69.8 PU=31.5 LR=41 LRA=70.7

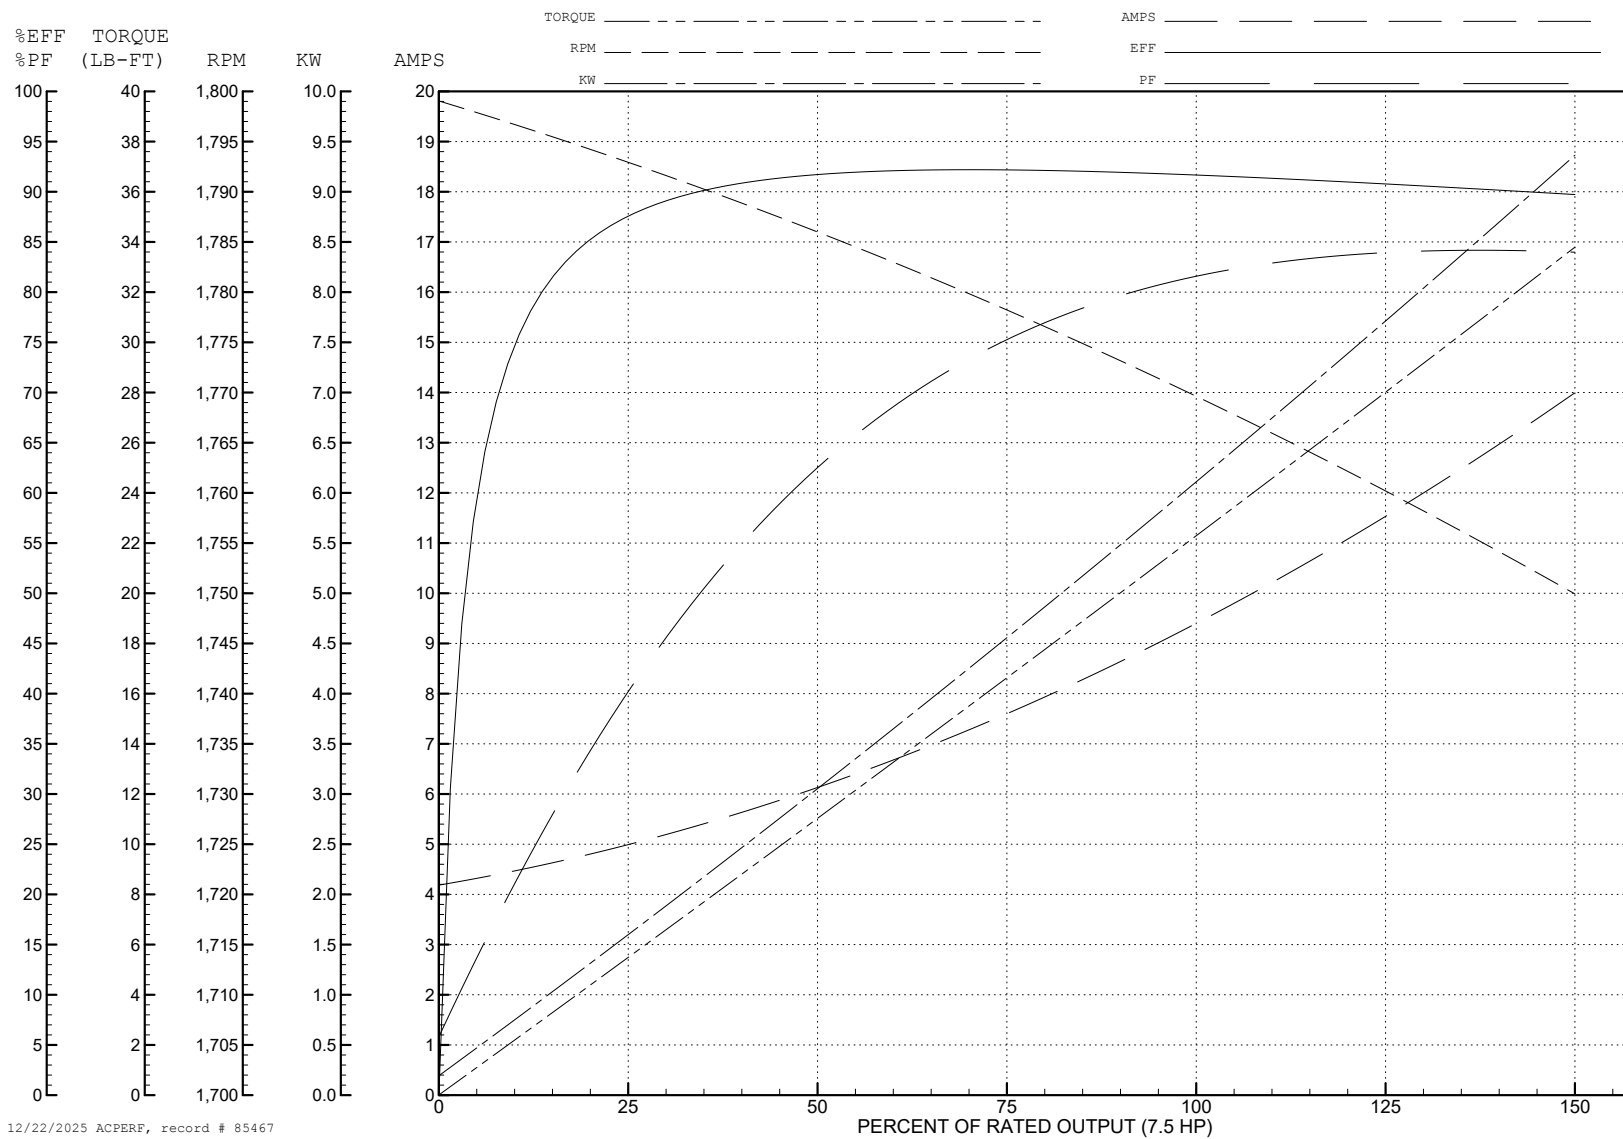

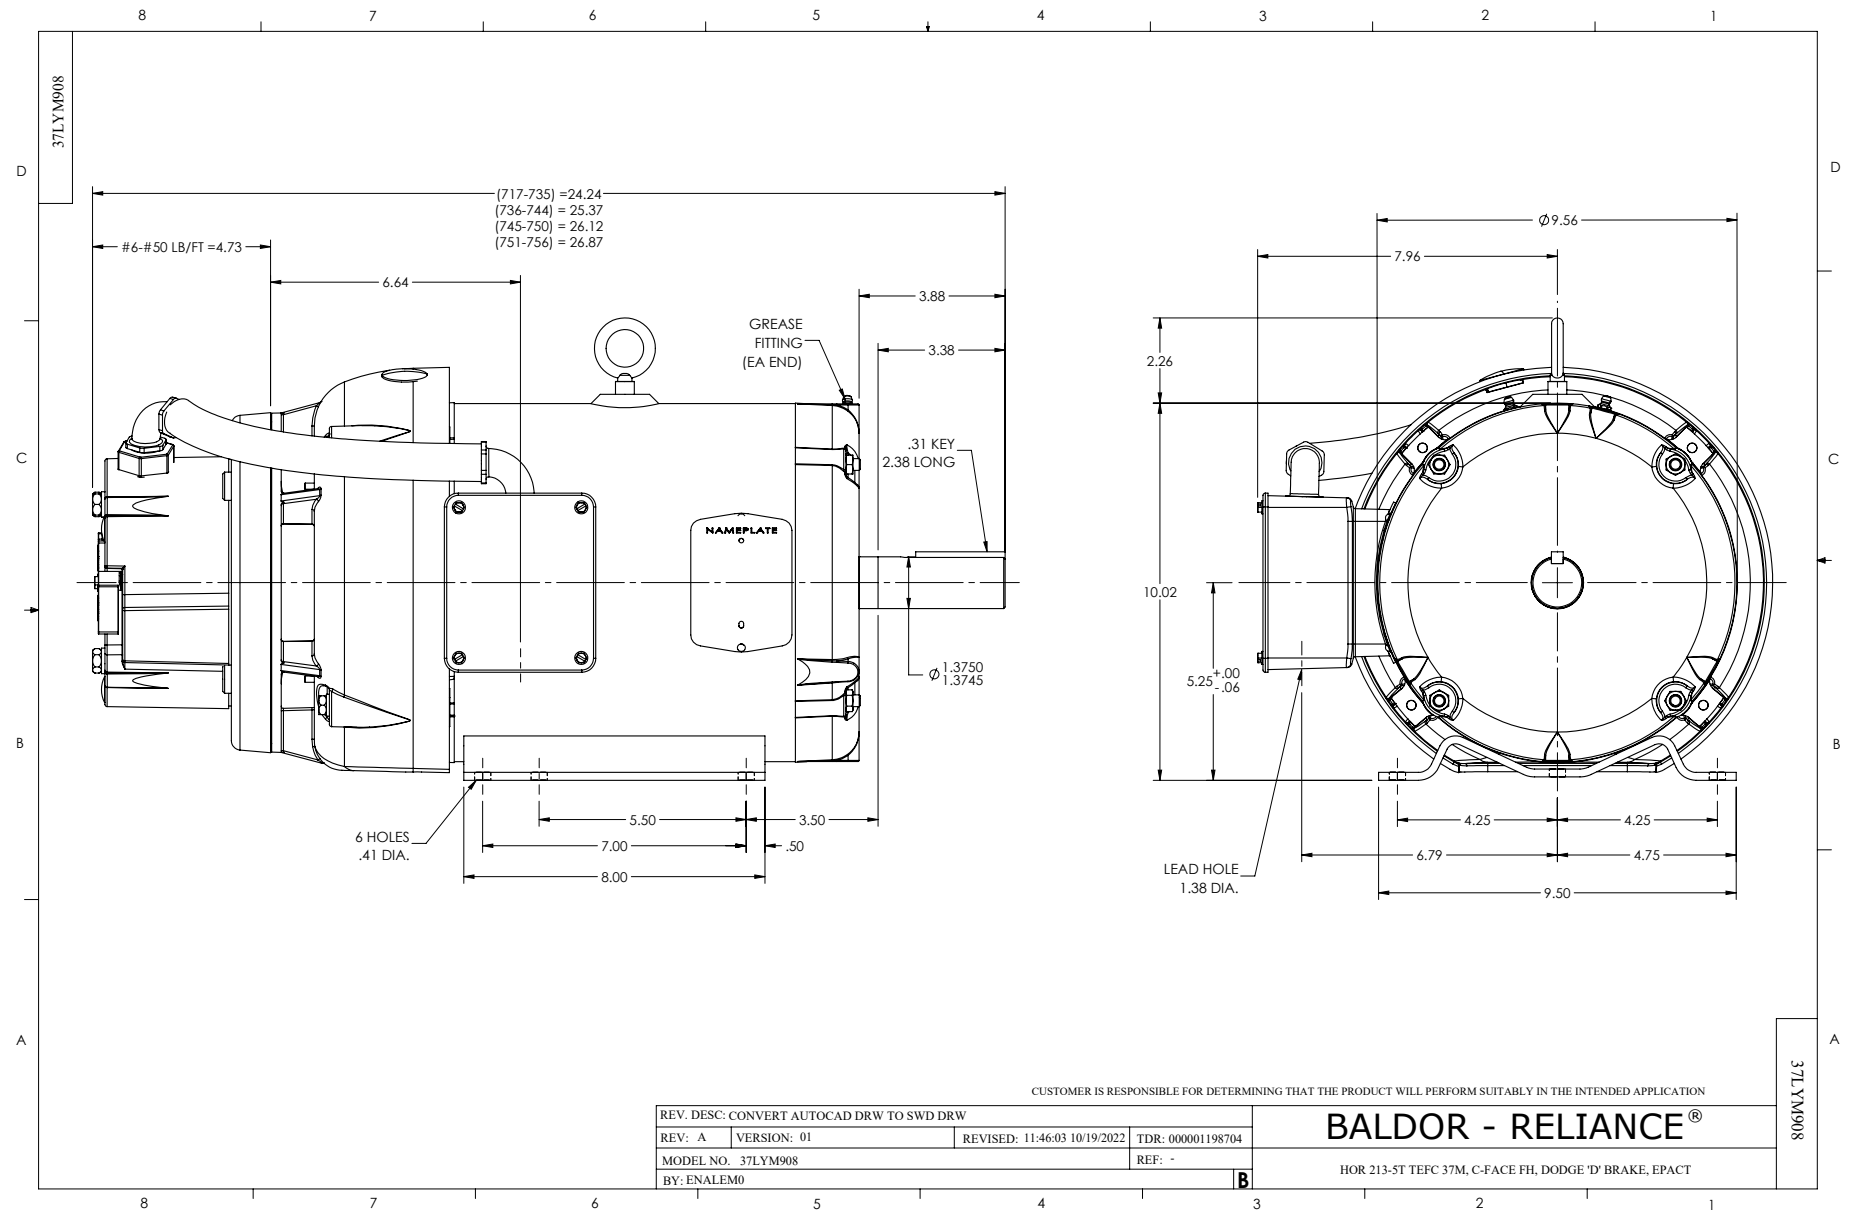

CD0005

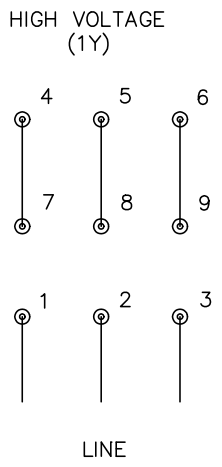

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
 B2 BLACK
 B3 GRAY
 B4 BLUE
 B5 RED

CD2120

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000000741785

FILE: \CKA\00037\282

REVISED: 12: 28: 11 04/12/2012

MTL: -

BY: CKRONSO

BALDOR • DODGE • RELIANCE

D-SERIES MOTOR BRAKE 5LD AC\DC

SH 1 of 1