



Customer information packet

ECP3772T-4

2HP, 865RPM, 3PH, 60HZ, 213T, 0732M, TEFC, F1, N

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	900 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	2
Current @ Voltage	3.800 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	Y
Type	AC
Mech. spec.	07K374
Base	
Status	PRD/A
Elec. spec.	07WGY780
Layout	07LYK374
Eff. date	10-01-2025
CD Diagram	CD0006
Poles	08
Leads	3#14
Proprietary	False
Created date	01-04-2011

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.8 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Max Speed	1350 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0732M
Mounting Arrangement	F1
Number of Poles	8
Overall Length	19.50 IN
Power Factor	57
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	865 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3258									
CAT.NO.	ECP3772T-4								
SPEC.	07K374Y780G1								
HP	2 TE								
VOLTS	460								
AMP	3.8								
RPM	865								
FRAME	213T		HZ	60		PH	3		
SER.F.	1.15		CODE	H	DES	B	CL	F	
RATING	40C AMB-CONT								
SN									
DE	6307		ODE	6307					
NEMA-NOM-EFF	85.5		PF	57					
G.MIN.EFF	82.5		CC	010A					
T. CODE	T3C		T=	160					

NP3261			
SPEC.	07K374Y780G1		
D.E. BRG.	35BC03XP30X		
O.D.E. BRG.	35BC03XP30X		
GREASE	POLYREX EM		
RPM MAX	1350	MAX. KVAR	1.67
BLANK			
INV.TYPE	PWM		
T=	160		
C HP FR	60	C HP TO	90
CT HZ FROM	2	CT HZ TO	60
VT HZ FROM	0-	VT HZ TO	60
HTR-VOLTS		HTR-AMPS	
HTR-WATTS		MAX. SPACE HEATER TEMP.	

AC Induction Motor Performance Data

Record # 53272

Typical performance - not guaranteed values

Winding: 07WGY780-R008				Type: 0732M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		2		Full Load Torque		12.1 LB-FT	
Volts		460		Start Configuration		direct on line	
Full Load Amps		3.8		Breakdown Torque		33.1 LB-FT	
R.P.M.		865		Pull-up Torque		19.5 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		B		KVA Code		H	
Service Factor (S.F.)		1.15		No-load Current		2.58 A	
NEMA Nom. Eff.		85.5		Power Factor		57	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	
S.F. Amps						Temp. Rise @ S.F. Load	
						Locked-rotor Power Factor	
						Rotor inertia	

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	23	38	48	56	62	66	60
Efficiency	73.3	82.4	85.4	86.7	84.4	82.8	85.3
Speed	893	885	878	869	859	844	863
Line amperes	2.68	2.96	3.35	3.84	4.47	5.16	4.22


ABB Motors and Mechanical Inc.


WINDING # 07WGY780

Typical performance - not guaranteed values.



2 HP 3 PH 60 HZ 865 RPM 460 V 0732M

TORQUES (LB-FT): PO=33.1 PU=19.5 LR=21 LRA=18.3

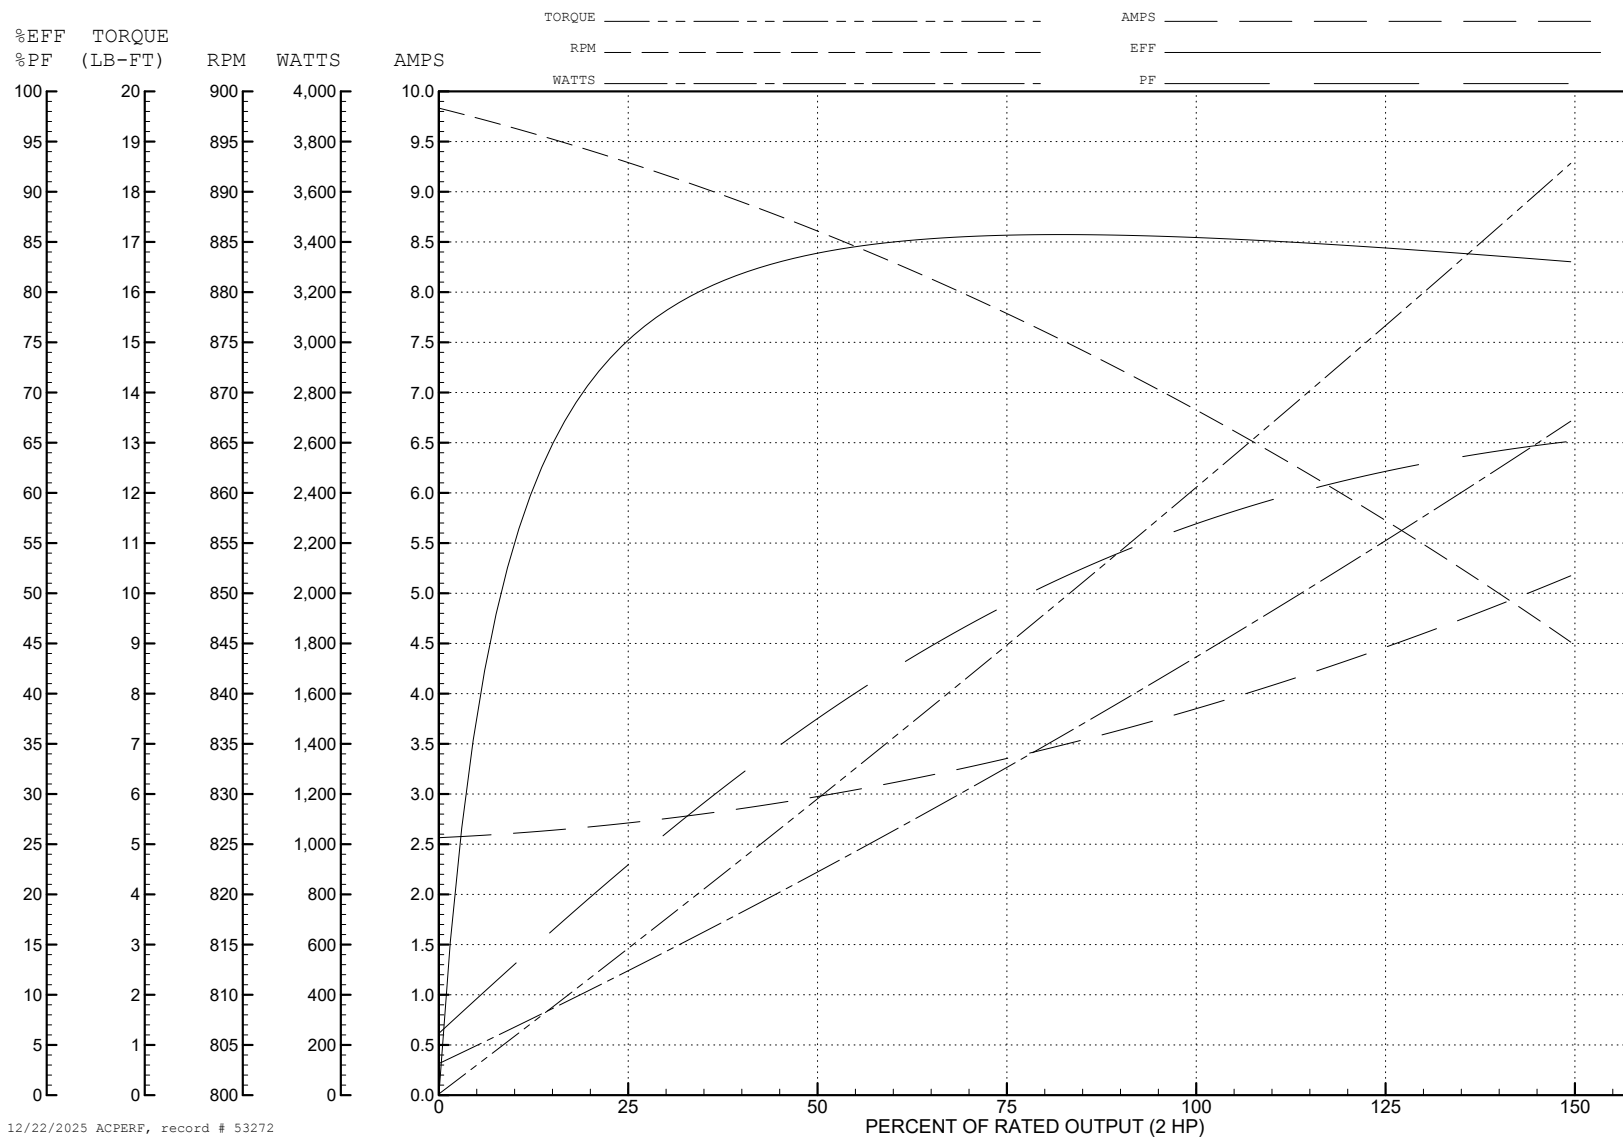

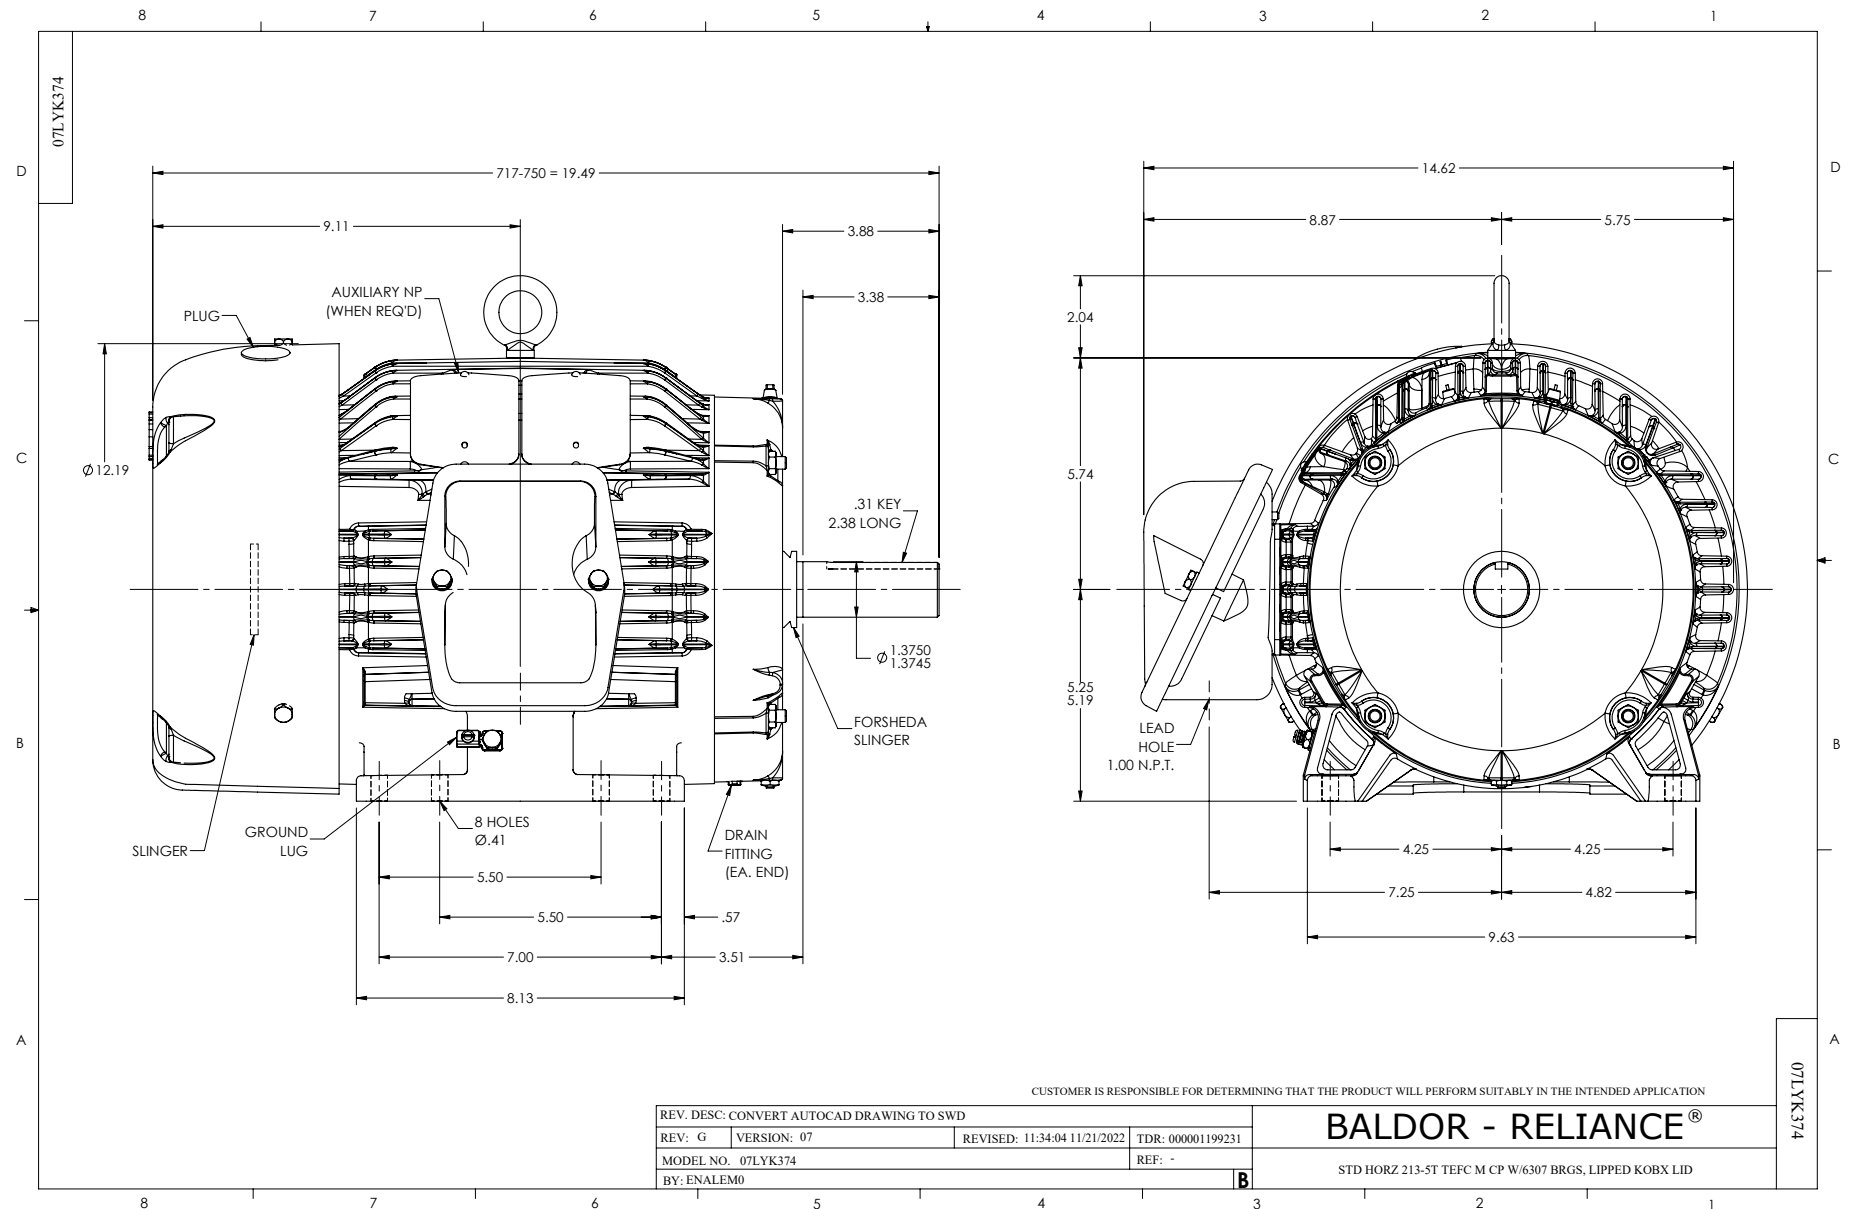

CD0006

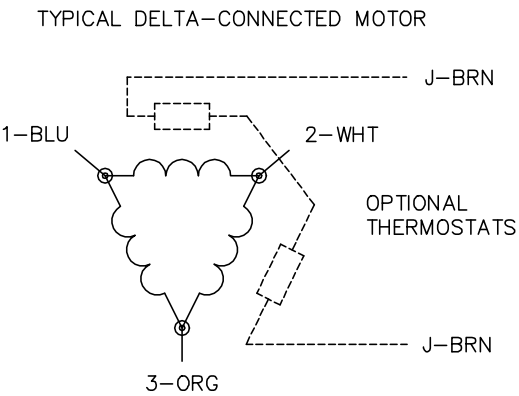

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1