



Customer information packet

ECS101M0K3EF4

3KW, 1500RPM, 3PH, 50HZ, D112S, 3632B, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	D112S
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Brushless Wound Field PM Rotor
Output @ Frequency	3.000 KW @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 380.0 V @ 50 HZ
Agency Approvals	CE WEEE CULUS
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	5
Current @ Voltage	5.300 A @ 380.0 V 10.600 A @ 190.0 V
Drip Cover	No Drip Cover
Duty Rating	S1
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Heater Indicator	No Heater
High Voltage Full Load Amps	5.3 a

Part detail

Revision	G
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGA0020
Layout	36LYT499
Eff. date	07-09-2024
CD Diagram	CD0005A25
Poles	04
Leads	9#12
Proprietary	False
Created date	09-26-2022

Insulation Class	F
Inverter Code	Inverter Duty
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3632B
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.16 IN
Power Factor	97
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.103 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3968B01A01												
CAT.NO.	ECS101MOK3EF4											
SPEC.	36-0000-3633					YR						
FRAME	D112S			IP		55	WT.		30			
KW	3	HZ		50		PH		3	DUTY-IPM		S1	
INS CL	F	CLASS RISE				B	AMB-C		40			
EFF. CL	IE5		EFF		92.4		COSØ		97			
VOLTS	190/380			FLA		10.6/5.3						
1/MIN	1500			1/MIN MAX				3000				
BEMF (V)	105/210			RS (OHMS)				0.82/3.30				
LD (MH)	13.5/54.0			LQ (MH)				47.8/191.0				
VPWM	CP =		50		TO		100					
CT	5	TO		50		VT		1	TO		50	
MATCHED INV												
DE	6206			ODE		6205						
SERIAL #												

Volts	380	Max RPM	3000	Conn Diag.	CD0006B03	Leads	3
Amps	5.3	Max Amps		Cs Diagram	CS1126	BEMF	210
KW	3	VFD#	ECIN4A5P8			LD	54
RPM	1500	S.F.	1.00			LQ	191
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.0984
							Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1336	90%	14.1	100%	3.6	92.9	6.79%	204
P2	750	50%	14.1	100%	2.0	90.1	5.49%	165
P3	380	25%	14.1	100%	1.0	83.9	4.85%	146
P4	1350	90%	7.0	50%	1.8	93.3	3.26%	98
P5	750	50%	7.0	50%	1.0	91.3	2.40%	72
P6	750	50%	3.5	25%	0.5	91.2	1.22%	36
P7	378	25%	3.5	25%	0.3	87.7	0.88%	27


61800-9-2 PDS Performance at Reference Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1508	100%	14.1	100%	4.0	90.2	10.89%	327
P2	750	50%	14.1	100%	2.0	86.8	7.63%	229
P3	255	17%	14.1	100%	0.7	72.0	6.59%	198
P4	1494	100%	7.0	50%	2.0	91.2	4.79%	144
P5	750	50%	7.0	50%	1.0	86.8	3.79%	114
P6	255	17%	7.0	50%	0.3	73.2	3.11%	93
P7	750	50%	3.5	25%	0.5	84.8	2.24%	67
P8	255	17%	3.5	25%	0.2	70.6	1.77%	53


Points not taken in certified order.

BALDOR • RELIANCE	DR By: <u>R & D</u> CK By: <u>USTOSAN</u> APP By: <u>USJAROB1</u> Date: <u>01/09/2025</u>	AC MOTOR PERFORMANCE CURVES	36WGA0022 36-0000-3639 Test - 111783
--------------------------	--	------------------------------------	---




Volts	380	Max RPM	3000	Conn Diag.	CD0006B03	Leads	3
Amps	5.3	Max Amps		Cs Diagram	CS1126	BEMF	210
KW	3	VFD #	ECIN4A5P8			LD	54
RPM	1500	S.F.	1.00			LQ	191
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.0984 Meas L-L

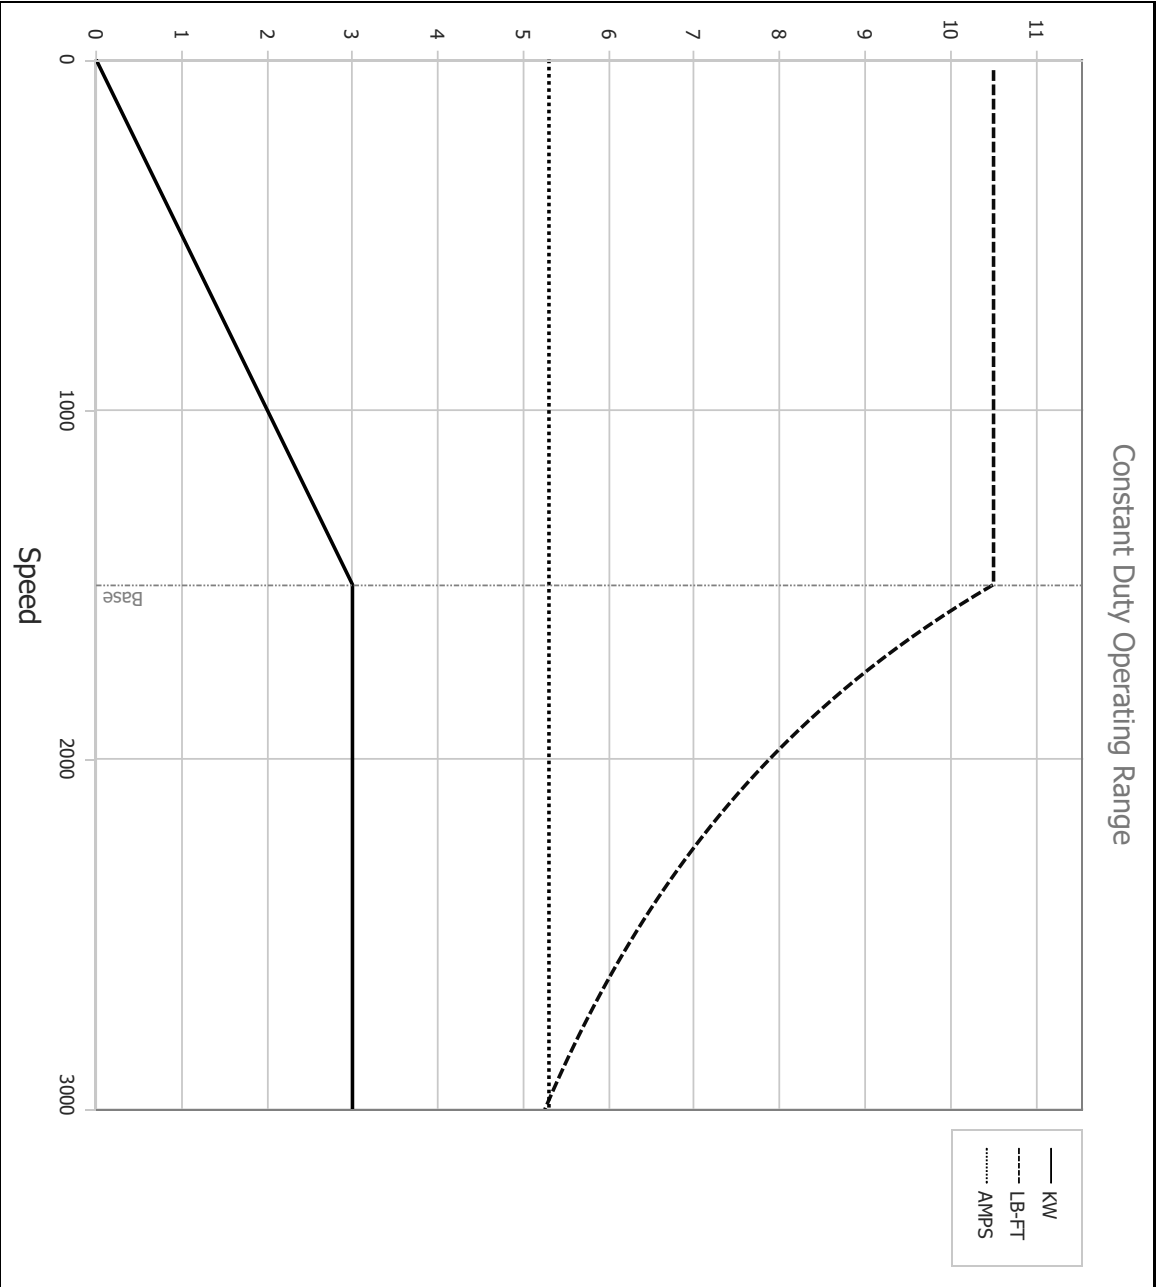

BALDOR • RELIANCE	DR By: <u>R & D</u> CK By: <u>USTOSAN</u> APP By: <u>USJAROB1</u> Date: <u>01/09/2025</u>	AC MOTOR PERFORMANCE CURVES	36WGA0022 36-0000-3639 Test - 111783
--------------------------	--	--	---

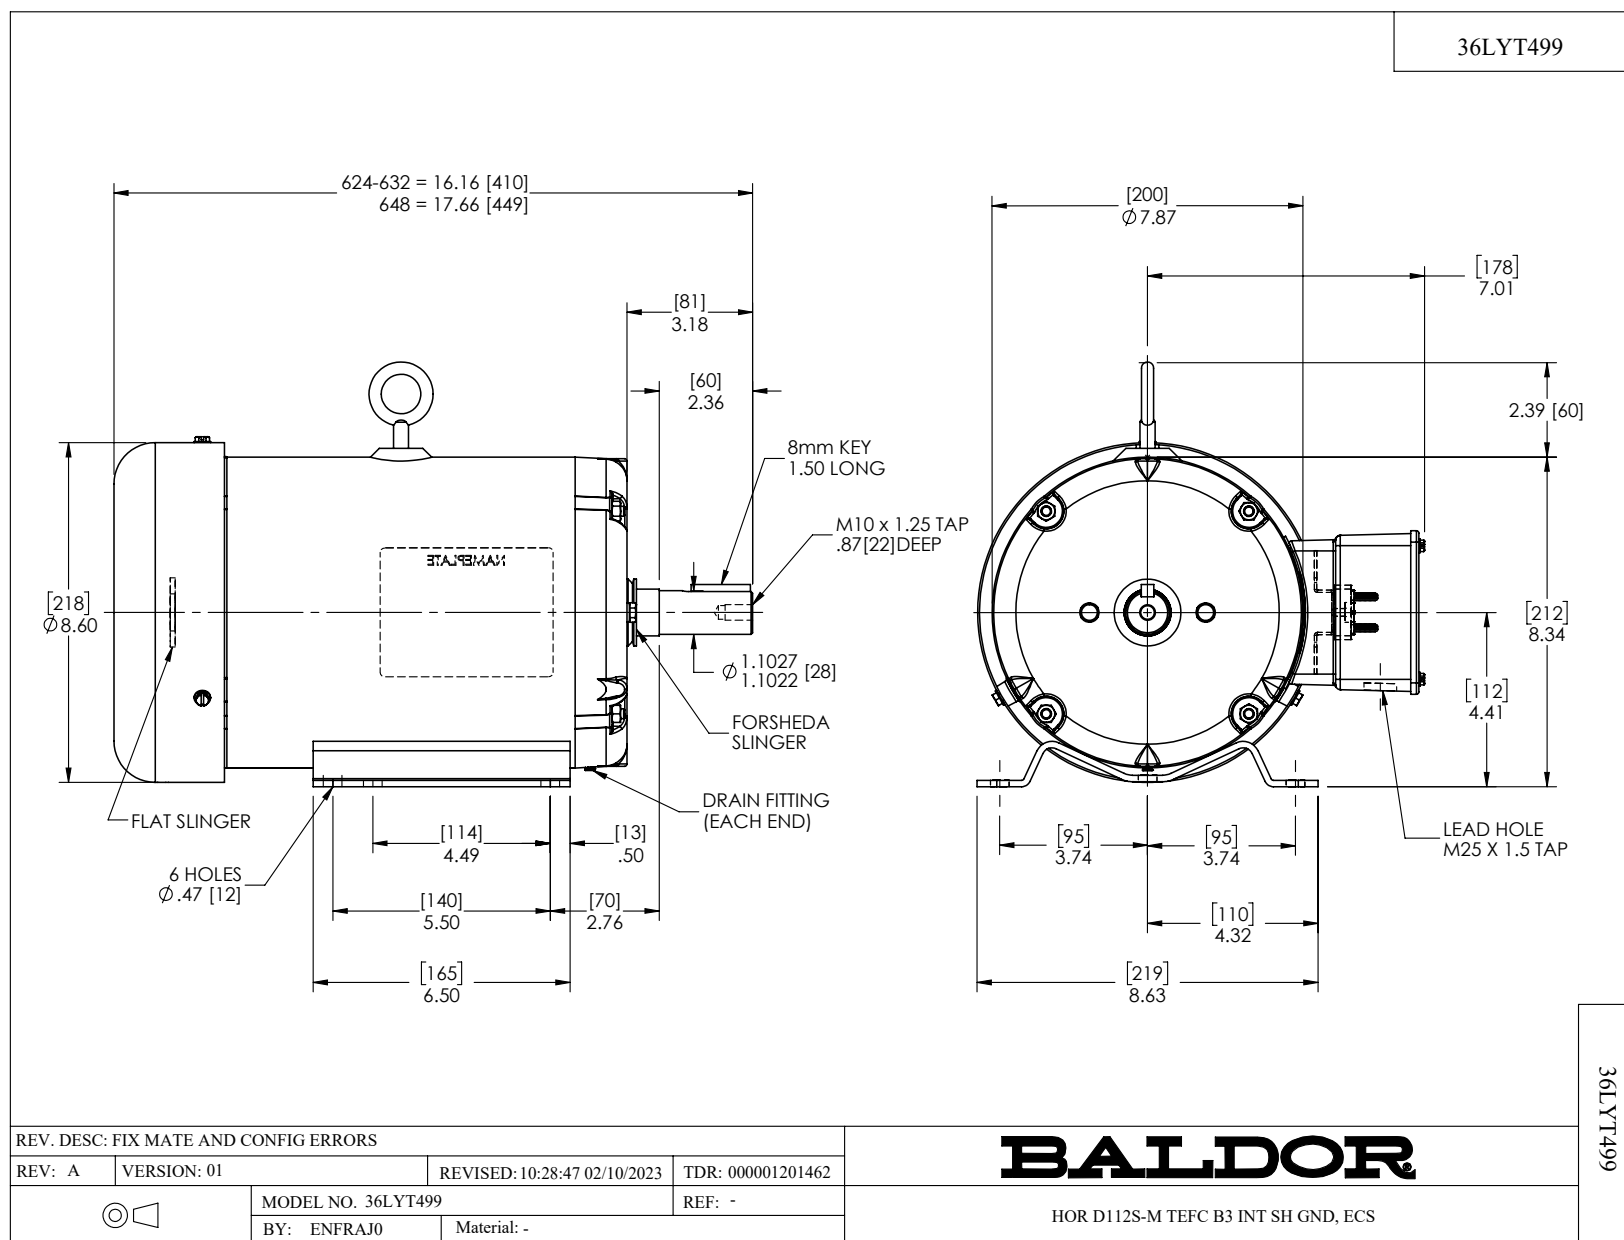

CD0006

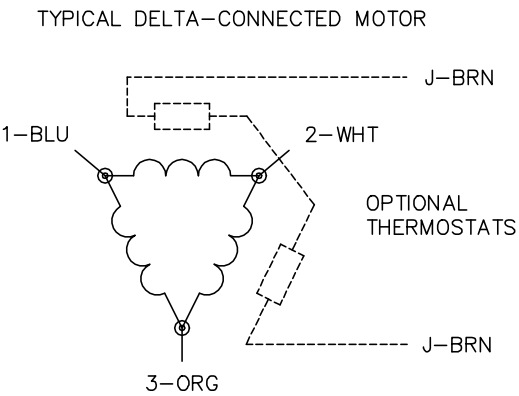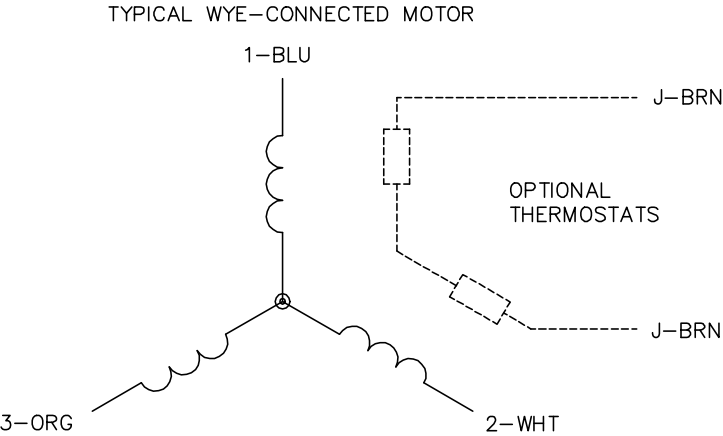

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006



REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®


3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD0005A25

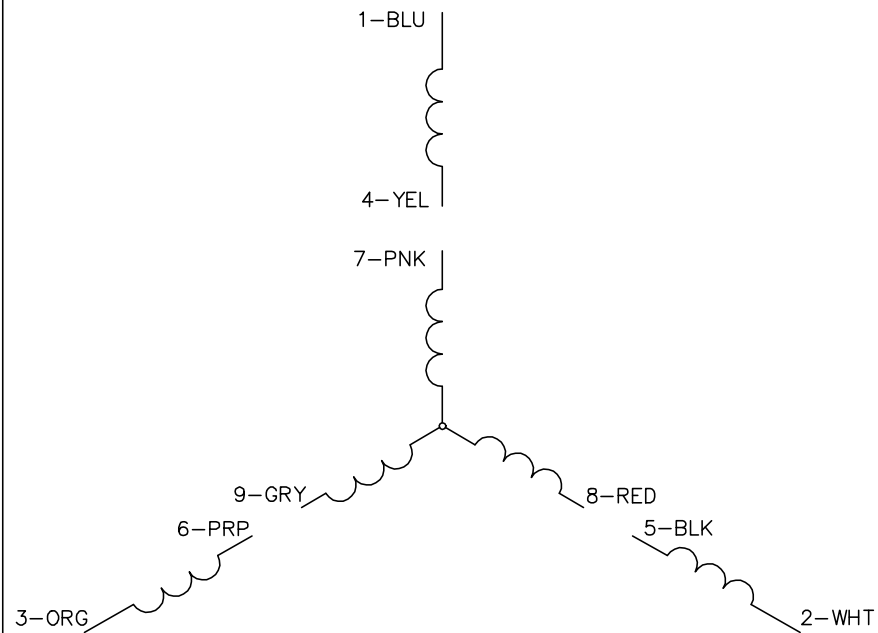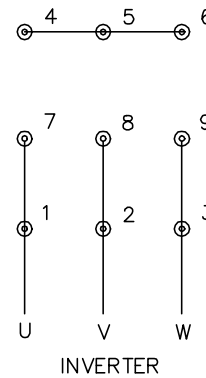LOW VOLTAGE
(2Y)

INVERTER

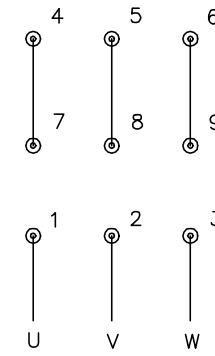HIGH VOLTAGE
(1Y)

INVERTER

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: NEW	VERSION: 00	TDR: 000001135746
REV. LTR: -	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
FILE: \AAA\00253\082		
MTL: -		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1

CD0005A25