



Customer information packet

ECTM4100T

15 AIR OVERHP, 1175RPM, 3PH, 60HZ, 284T, 1046

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	284T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	42.000 A @ 208.0 V 42.000 A @ 230.0 V 21.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	S
Type	AC
Mech. spec.	10K189
Base	
Status	PRD/A
Elec. spec.	10WGY561
Layout	10LYK189
Eff. date	10-08-2025
CD Diagram	CD0180
Poles	06
Leads	9#10
Proprietary	False
Created date	04-22-2016

Heater Indicator	No Heater
High Voltage Full Load Amps	21.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1046M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.63 IN
Power Factor	73
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1175 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	NONE (OLD)
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2178									
CAT.NO.	ECTM4100T								
SPEC.	10K189Y561G1								
HP	15 AIR OVER								
VOLTS	230/460								
AMP	42/21								
RPM	1175								
FRAME	284T	HZ		60		PH	3		
SER.F.	1.15	CODE	H	DES	A	CL	F		
NEMA-NOM-EFF	91.7	PF	73						
RATING	40C AMB-CONT								
CC									
DE	6311	ODE		6309					
ENCL	TEAO	SN							
	1900 FPM @ 360CFM								

AC Induction Motor Performance Data

Record # 66702

Typical performance - not guaranteed values

Winding: 10WGY561-R023			Type: 1046M		Enclosure: TEAO		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		15 AIR OVER		Full Load Torque		66.68 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		42/21		Breakdown Torque		213 LB-FT	
R.P.M.		1175		Pull-up Torque		93.1 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		114 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		144 A
Service Factor (S.F.)		1.15		No-load Current		12.4 A	
NEMA Nom. Eff.		91.7	Power Factor	73	Line-line Res. @ 25°C		0.502 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		43°C	
S.F. Amps				Temp. Rise @ S.F. Load		51°C	
				Locked-rotor Power Factor		32.9	
				Rotor inertia		5.63 lb-ft²	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	52	65	72	76	78	75
Efficiency	83	89.4	91.3	91.7	91.4	90.8	91.7
Speed	1196	1193	1189	1185	1181	1177	1181
Line amperes	13.2	15.1	17.9	21.3	25.3	29.6	23.4


ABB Motors and Mechanical Inc.

WINDING # 10WGY561


Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1175 RPM 460 V 1046M



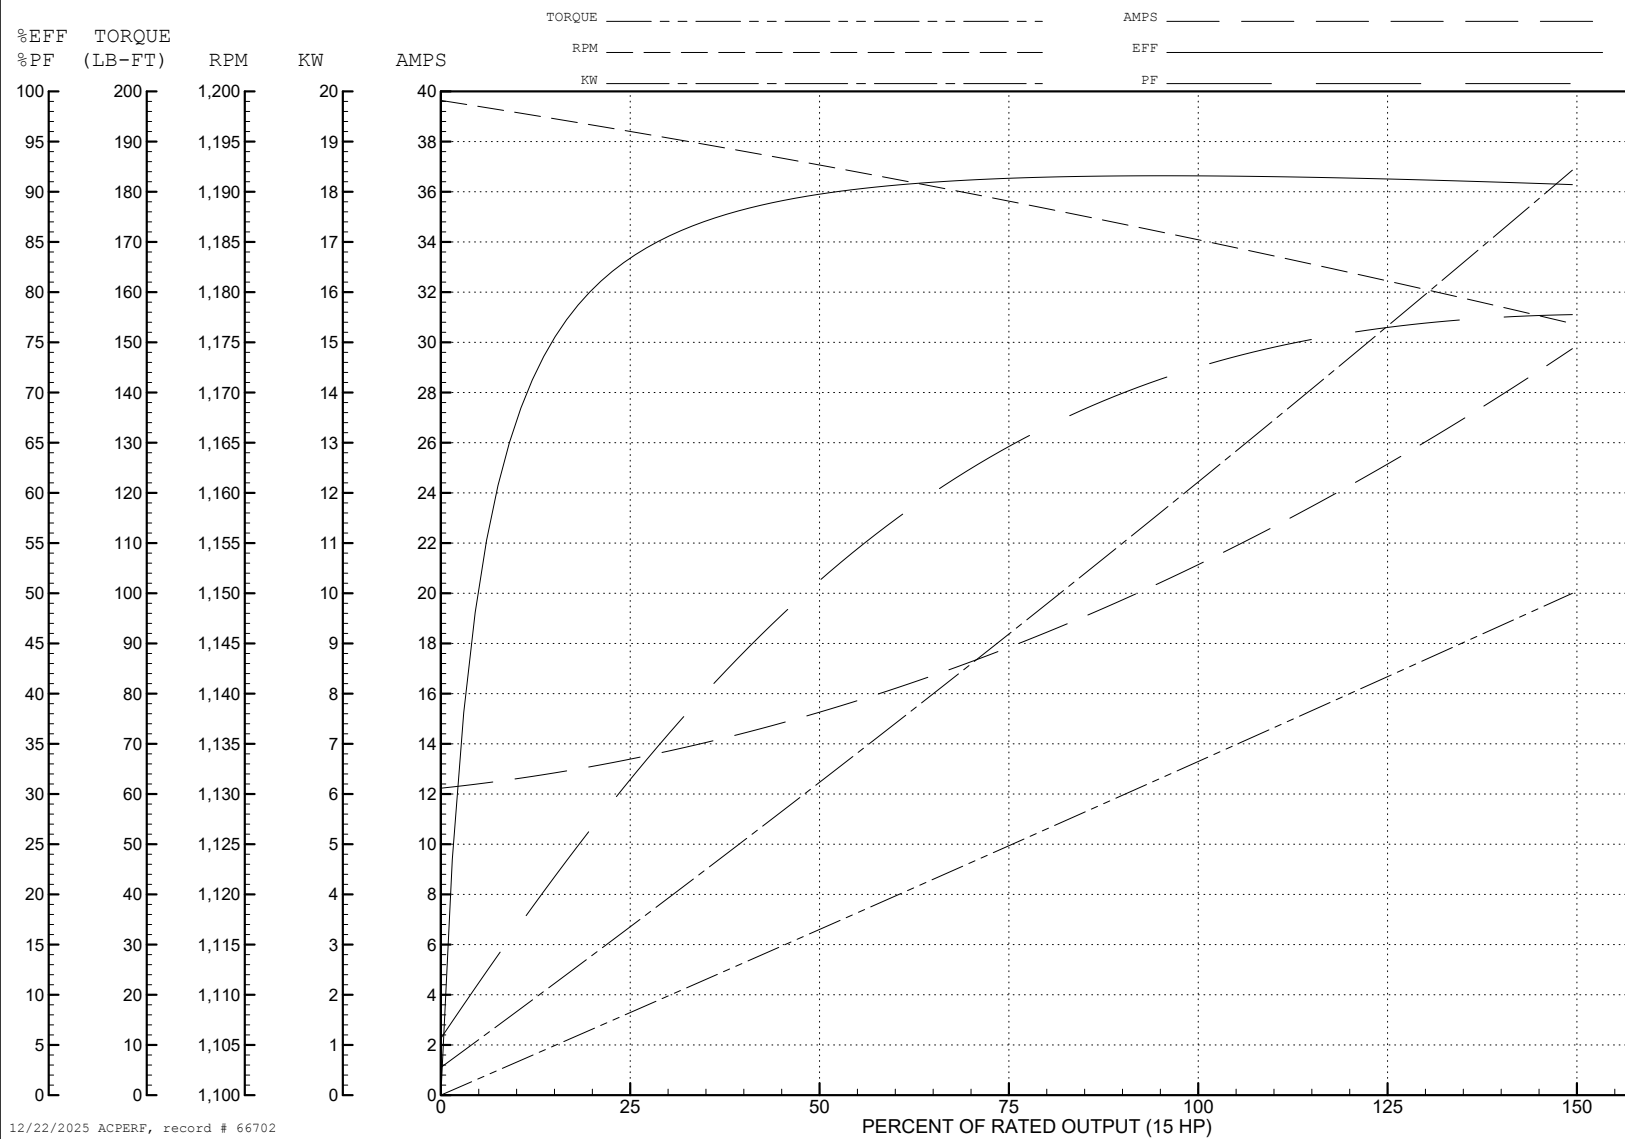
TORQUES (LB-FT): PO=213 PU=93.1 LR=114 LRA=144



12/22/2025 ACPERF, record # 66702

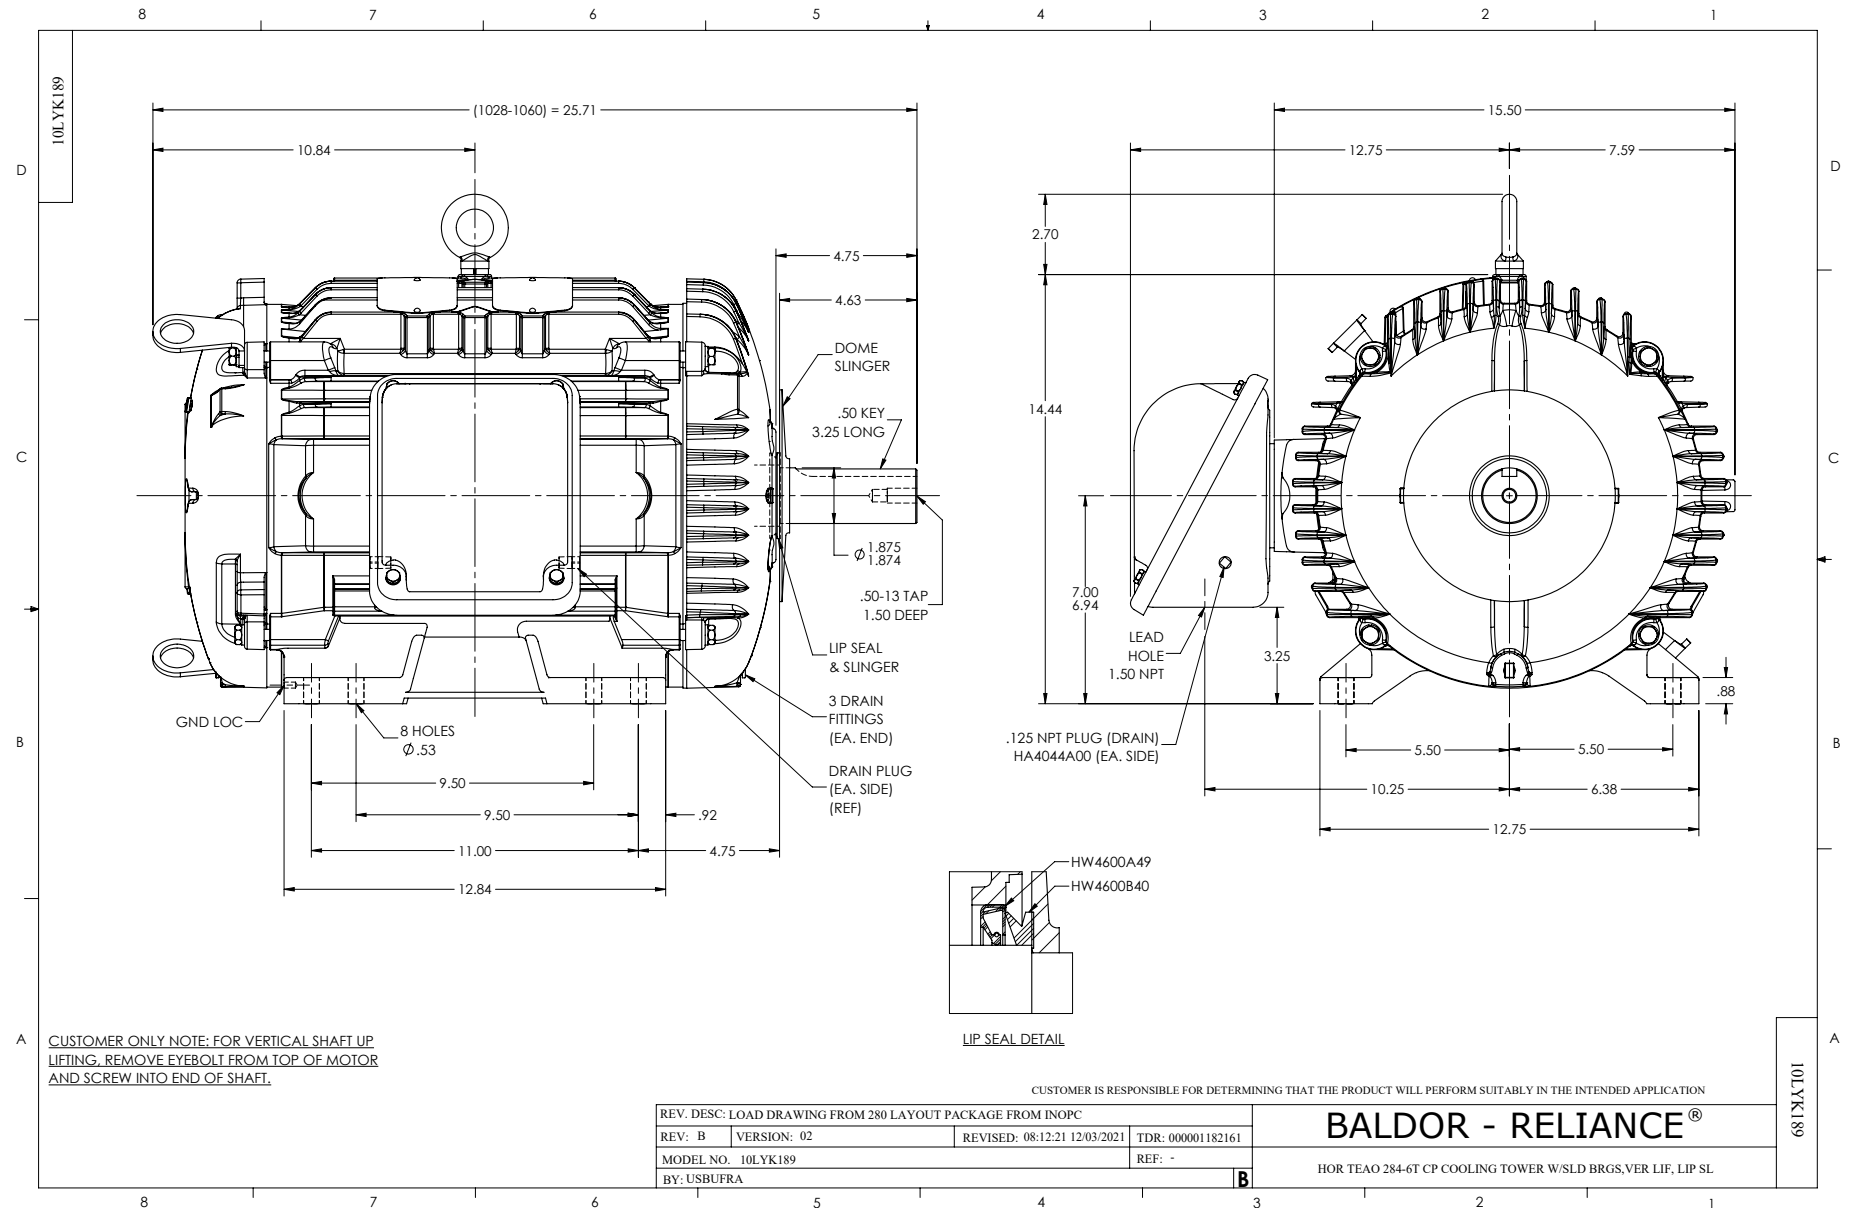

CD0180

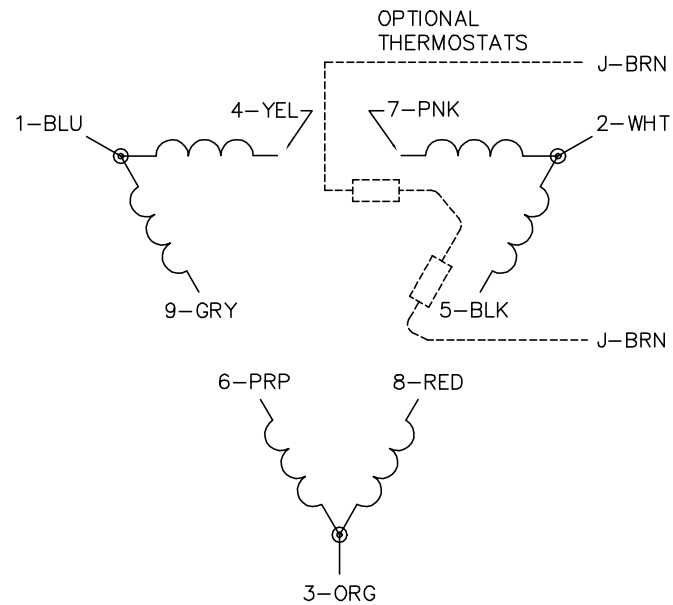LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1

CD0180