



Customer information packet

EM3615T-57

5HP, 1450RPM, 3PH, 50HZ, 184T, 3646M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 50 HZ 400.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS IE3 UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.800 A @ 230.0 V 8.000 A @ 400.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	L
Type	AC
Mech. spec.	36A001
Base	
Status	PRD/A
Elec. spec.	36WGR998
Layout	36LYA001
Eff. date	05-20-2025
CD Diagram	CD0022
Poles	04
Leads	6#14
Proprietary	False
Created date	12-22-2015

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	8.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3646M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.04 IN
Power Factor	75
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2716L									
CAT NO	EM3615T-57								
SPEC.	36A001R998G1								
HP	5/3.7KW					PH	3		
VOLTS	230/400								
AMP	13.8/8								
R.P.M. (1/MIN)	1450								
FRAME	184T		HZ	50		I.P.	44		
SER.F.	1.15	CODE	K	DES	B	CL	F		
NOM.EFF.	88.4		% (100%)						
PF	75								
RATING	40C AMB-S1 CONT				CC				
DE BRG	6206		ODE	6205					
ENCL	TEFC	SN							
BLANK	IE3-89.0(75%)88.0(50%)								
	IC411 46KG								

AC Induction Motor Performance Data

Record # 73920

Typical performance - not guaranteed values

Winding: 36WGR998-R002			Type: 3646M		Enclosure: OPEN		
Nameplate Data				400 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		5		Full Load Torque		18.05 LB-FT	
Volts		230/400		Start Configuration		direct on line	
Full Load Amps		13.8/8		Breakdown Torque		76.3 LB-FT	
R.P.M.		1450		Pull-up Torque		40.8 LB-FT	
Hz	50	Phase	3	Locked-rotor Torque		49.6 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		61.5 A
Service Factor (S.F.)		1.15		No-load Current		4.2 A	
NEMA Nom. Eff.		88.4	Power Factor	75	Line-line Res. @ 25°C		1.91 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		82°C	
S.F. Amps				Temp. Rise @ S.F. Load		100°C	
				Locked-rotor Power Factor		44.8	
				Rotor inertia		0.428 LB-FT2	

Load Characteristics 400 V, 50 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	57	71	78	82	84	80
Efficiency	82.6	88.3	89.2	88.6	87.4	85.7	87.9
Speed	1490	1478	1467	1453	1440	1423	1445
Line amperes	4.53	5.3	6.4	7.8	9.4	11.2	8.76


ABB Motors and Mechanical Inc.


WINDING # 36WGR998

Typical performance - not guaranteed values.


5 HP 3 PH 50 HZ 1450 RPM 400 V 3646M

TORQUES (LB-FT): PO=76.3 PU=40.8 LR=49.6 LRA=61.5

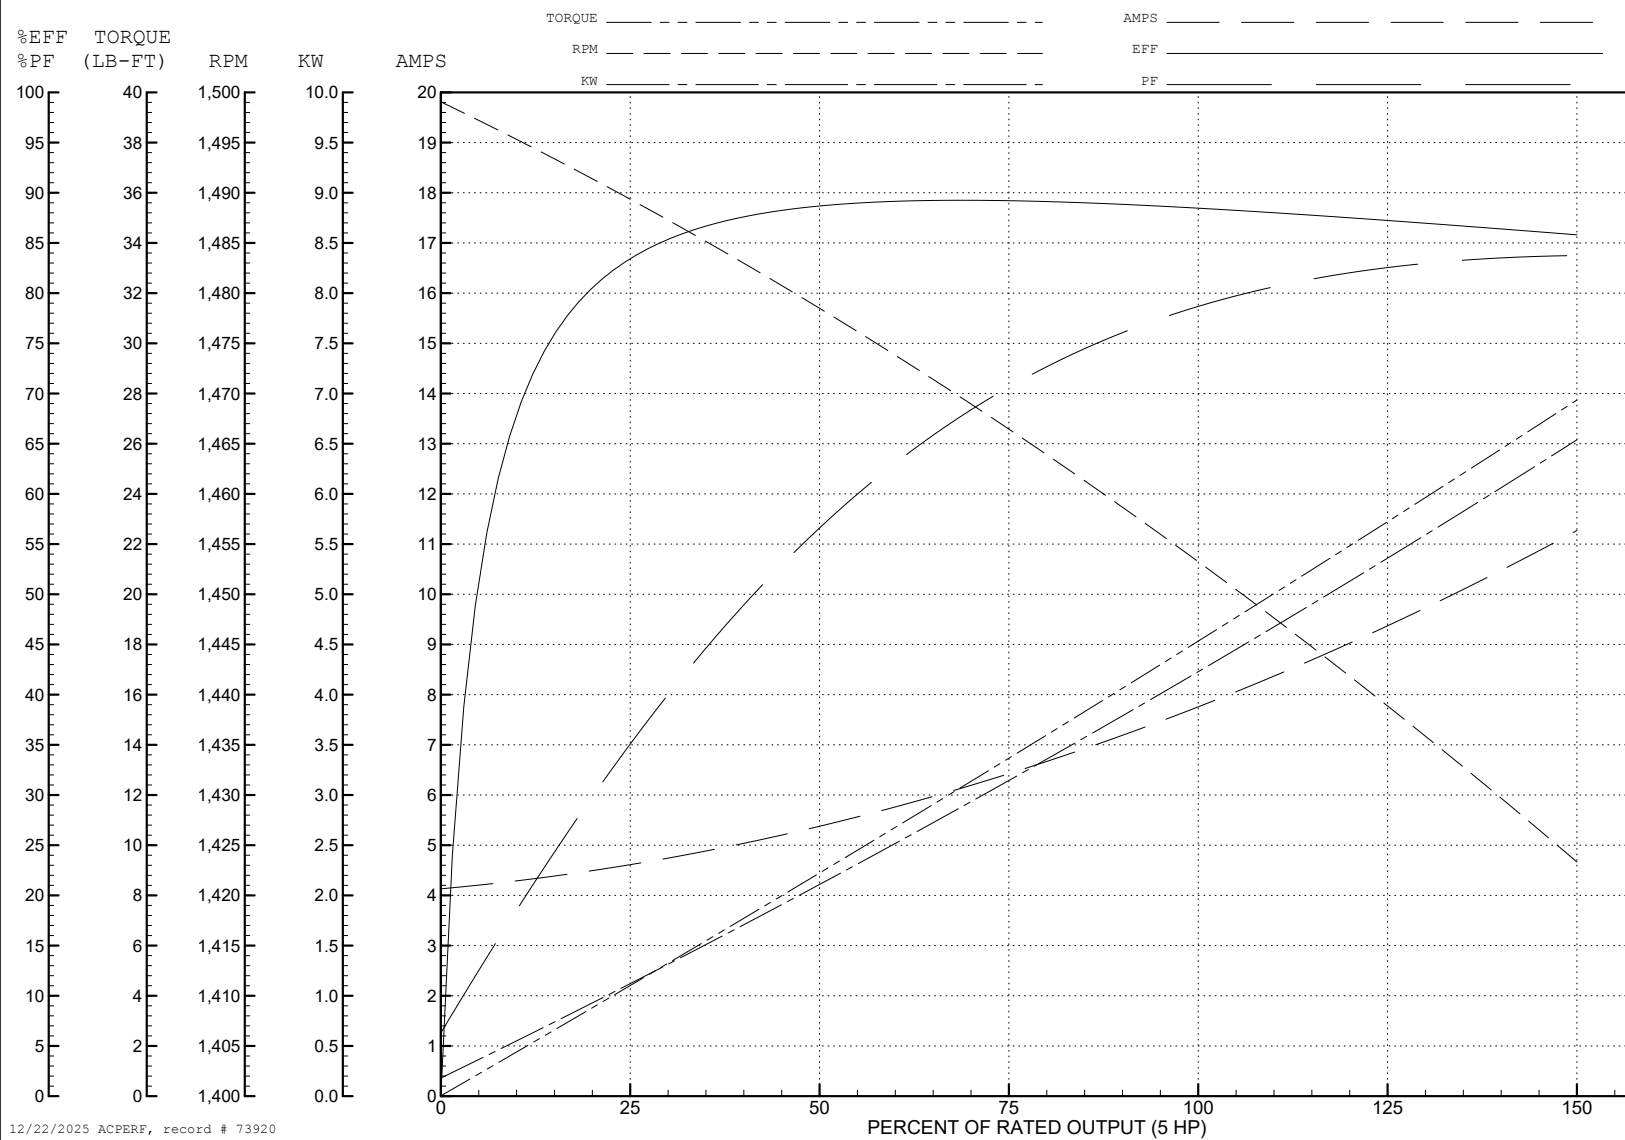


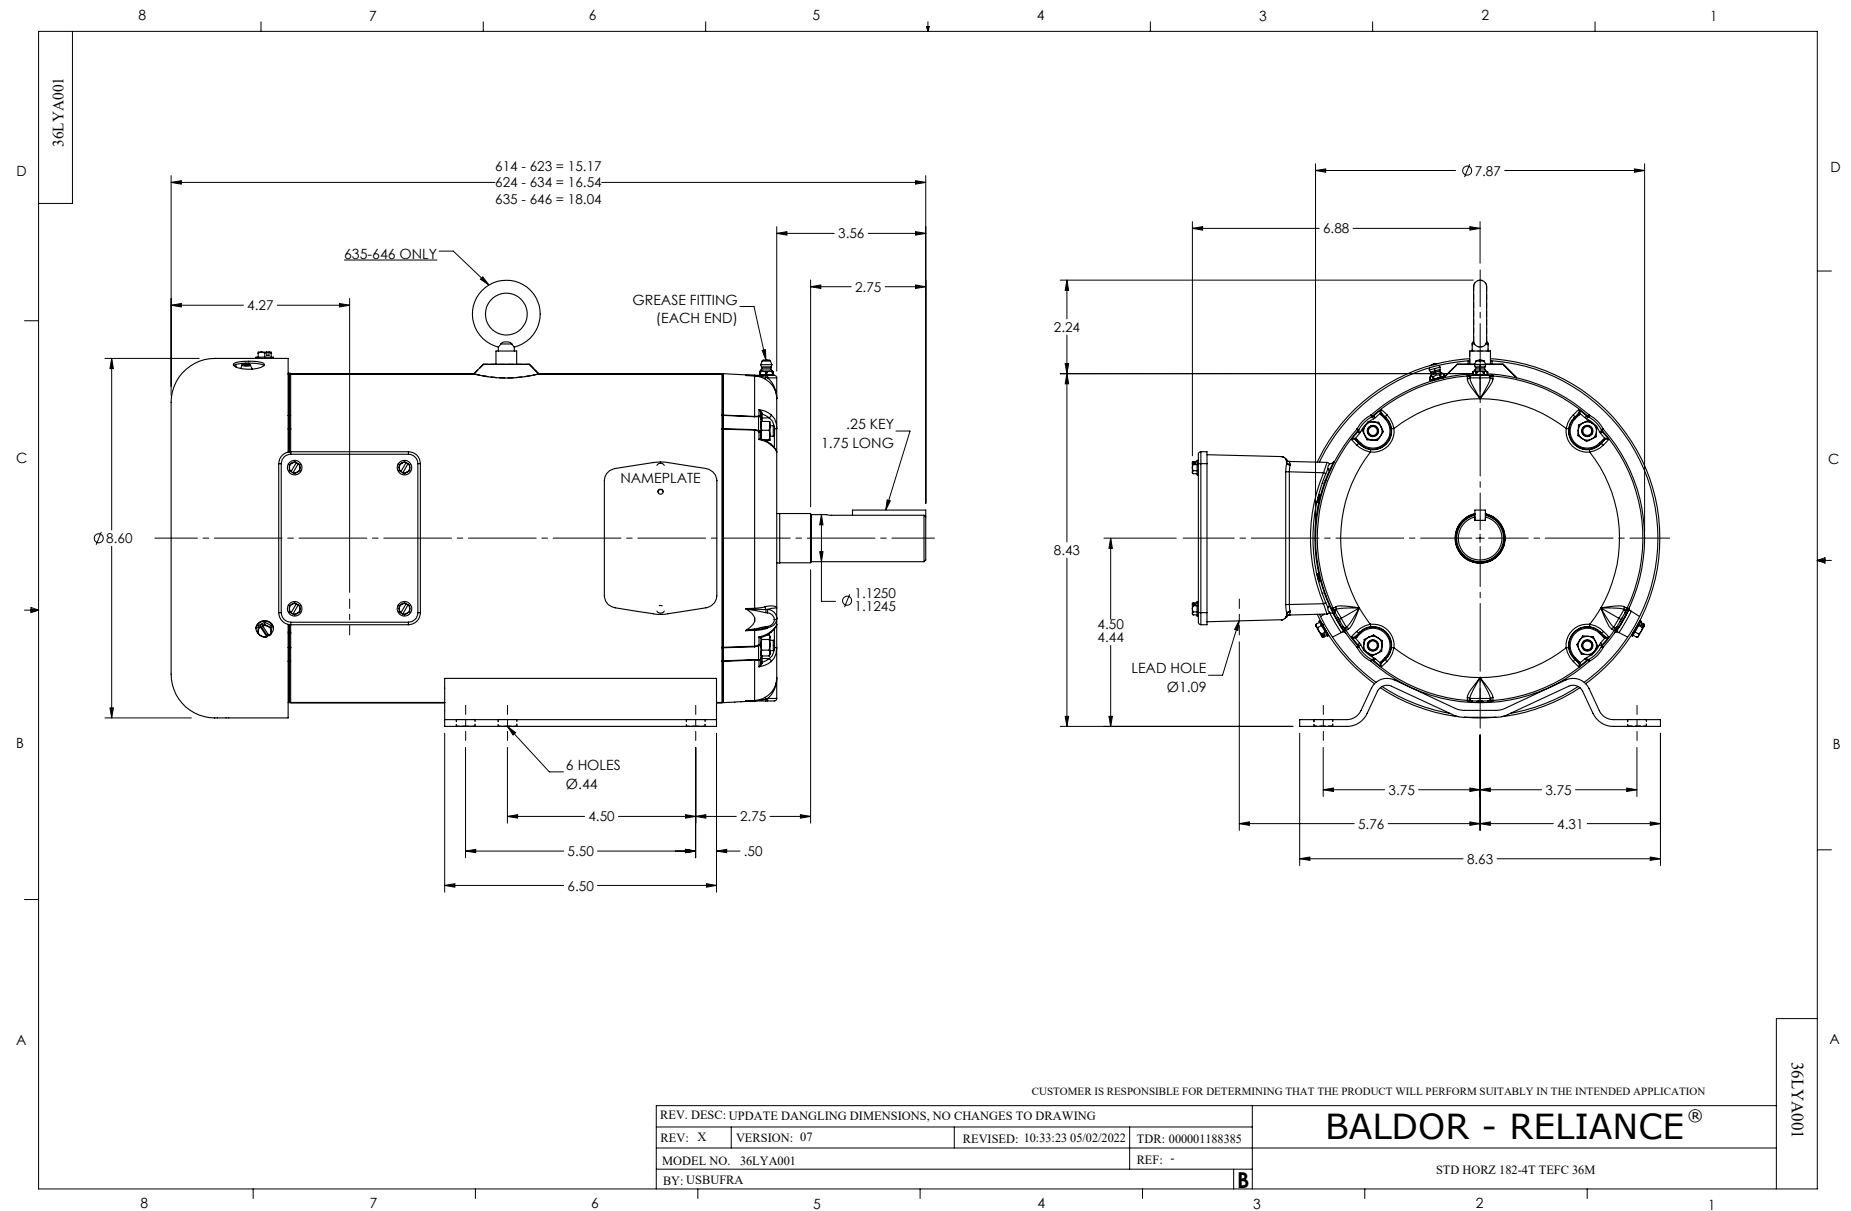

CD0022

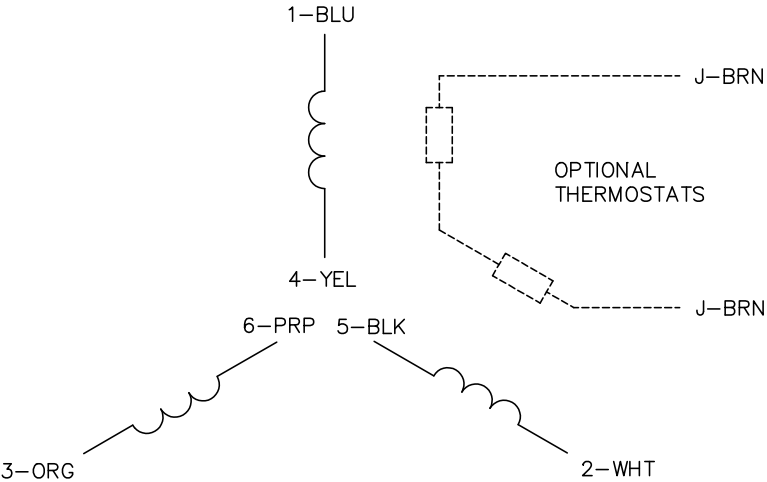


LOW VOLTAGE
(1D)



LINE

HIGH VOLTAGE
(1Y)



LINE

- NOTES:
1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: F

BY: JLP

REVISED: 01/21/99 3:54

TDR: 0171435

CD0022

FILE: AAA00005144

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 6 LEADS, DELTA/WYE CONNECTION

CD0022