



Customer information packet

FDAOL3504A

.5HP, 1745RPM, 1PH, 60HZ, 56H, 3424LC, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	56H
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.800 A @ 115.0 V 2.500 A @ 208.0 V 2.400 A @ 230.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	78.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.4 a

Part detail

Revision	G
Type	AC
Mech. spec.	34M951
Base	
Status	PRD/A
Elec. spec.	34WGX444
Layout	34LYM951
Eff. date	11-27-2024
CD Diagram	CD0320
Poles	04
Leads	7#18
Proprietary	False
Created date	03-13-2017

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3424LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.08 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.20
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1745 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Winding Thermal 2	None
--------------------------	-------------

Nameplate

NP1280L									
CAT.NO.	FDAOL3504A								
SPEC.	34M951X444G1								
HP	.5								
VOLTS	115/230								
AMP	4.8/2.4								
RPM	1745								
FRAME	56H		HZ	60		PH	1		
SER.F.	1.20		CODE	K	DES	-		CL	F
NEMA-NOM-EFF	78.5		PF	89					
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEAO	SN							
	SFA 5.4/2.7								

AC Induction Motor Performance Data

Record # 63044

Typical performance - not guaranteed values

Winding: 34WGX444-R008			Type: 3424LC		Enclosure: TEAO		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		.5	Full Load Torque		1.5 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		4.8/2.4	Breakdown Torque		3.6 LB-FT		
R.P.M.		1745	Pull-up Torque		3.1 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		4.2 LB-FT	
NEMA Design Code		-	KVA Code	K	Starting Current		36.2 A
Service Factor (S.F.)		1.2		No-load Current		2 A	
NEMA Nom. Eff.		78.5	Power Factor	89	Line-line Res. @ 25°C		1.18 Ω A Ph 4.17 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		37°C	
S.F. Amps		5.4/2.7		Temp. Rise @ S.F. Load		44°C	
				Locked-rotor Power Factor		87.7	
				Rotor inertia		0.057 LB-FT2	

Load Characteristics 115 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	73	81	89	89	91	92	91
Efficiency	57	72.4	76.9	78.5	78.1	75.8	78.2
Speed	1786	1773	1758	1742	1722	1699	1726
Line amperes	2	2.8	3.6	4.6	5.6	6.8	5.4


ABB Motors and Mechanical Inc.


WINDING # 34WGX444

Typical performance - not guaranteed values.


0.5 HP 1 PH 60 HZ 1745 RPM 115 V 3424LC

TORQUES (LB-FT): PO=3.6 PU=3.1 LR=4.2 LRA=36.2

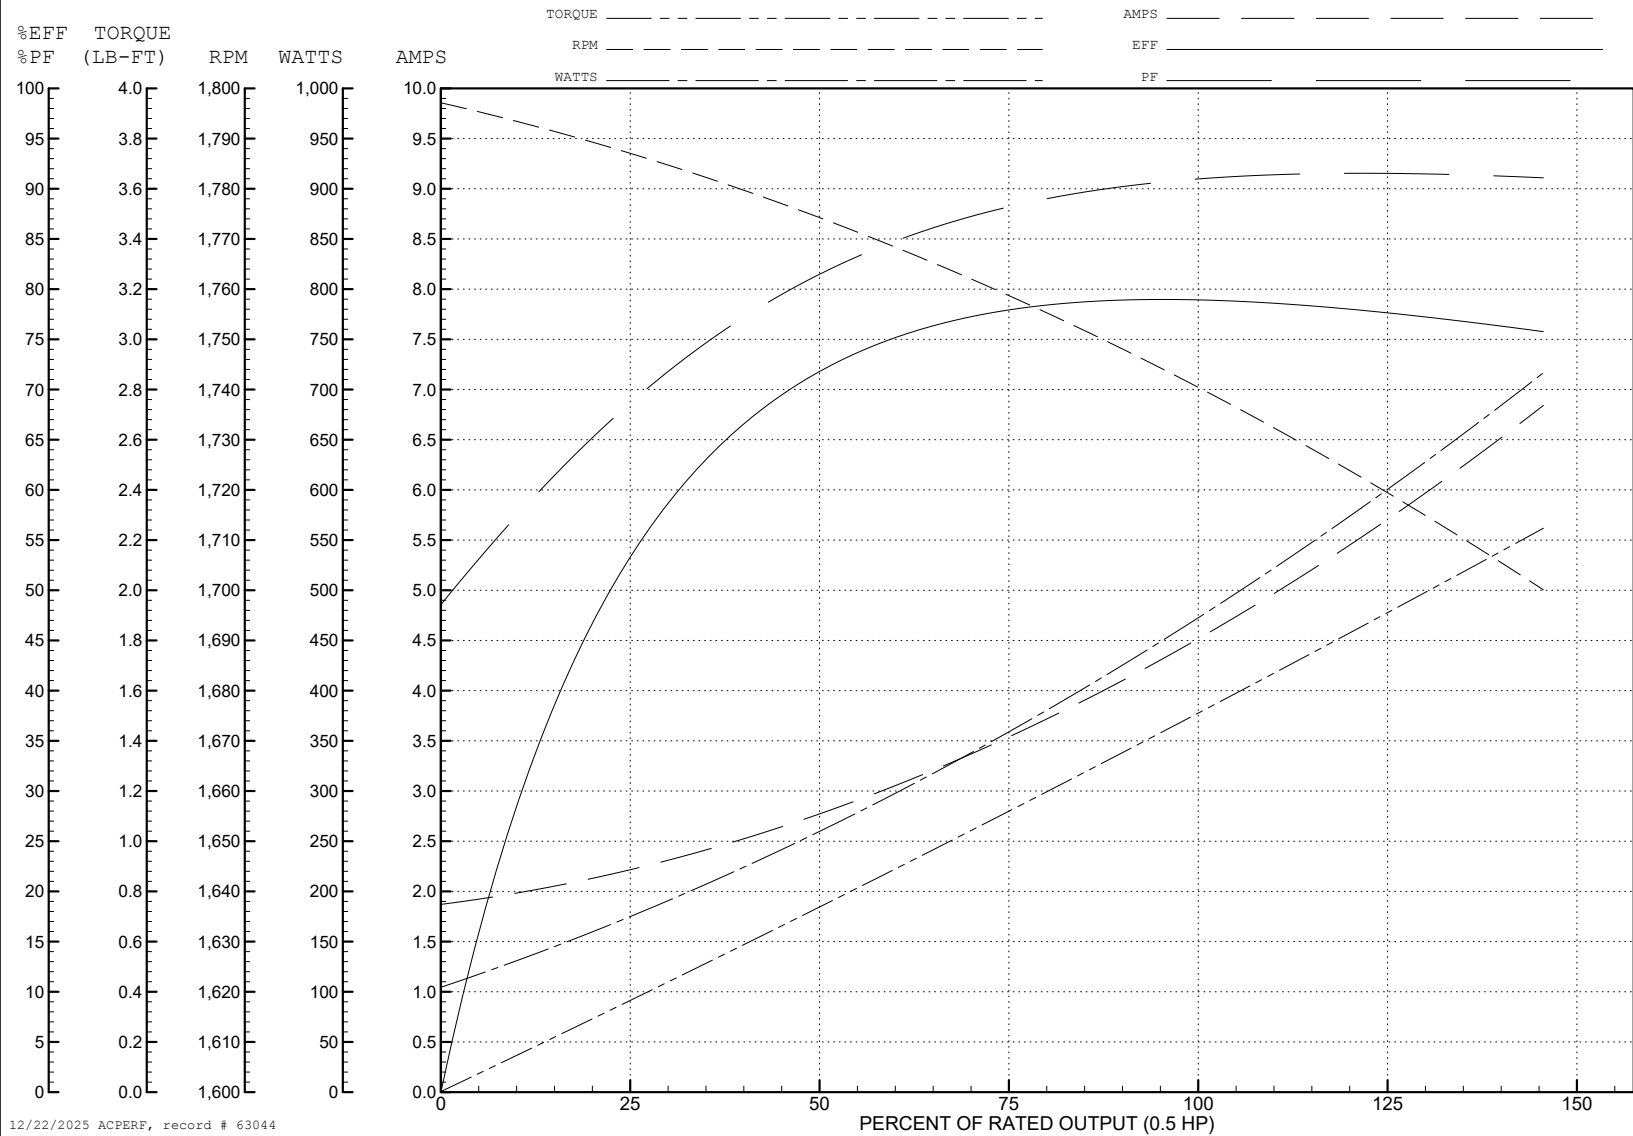

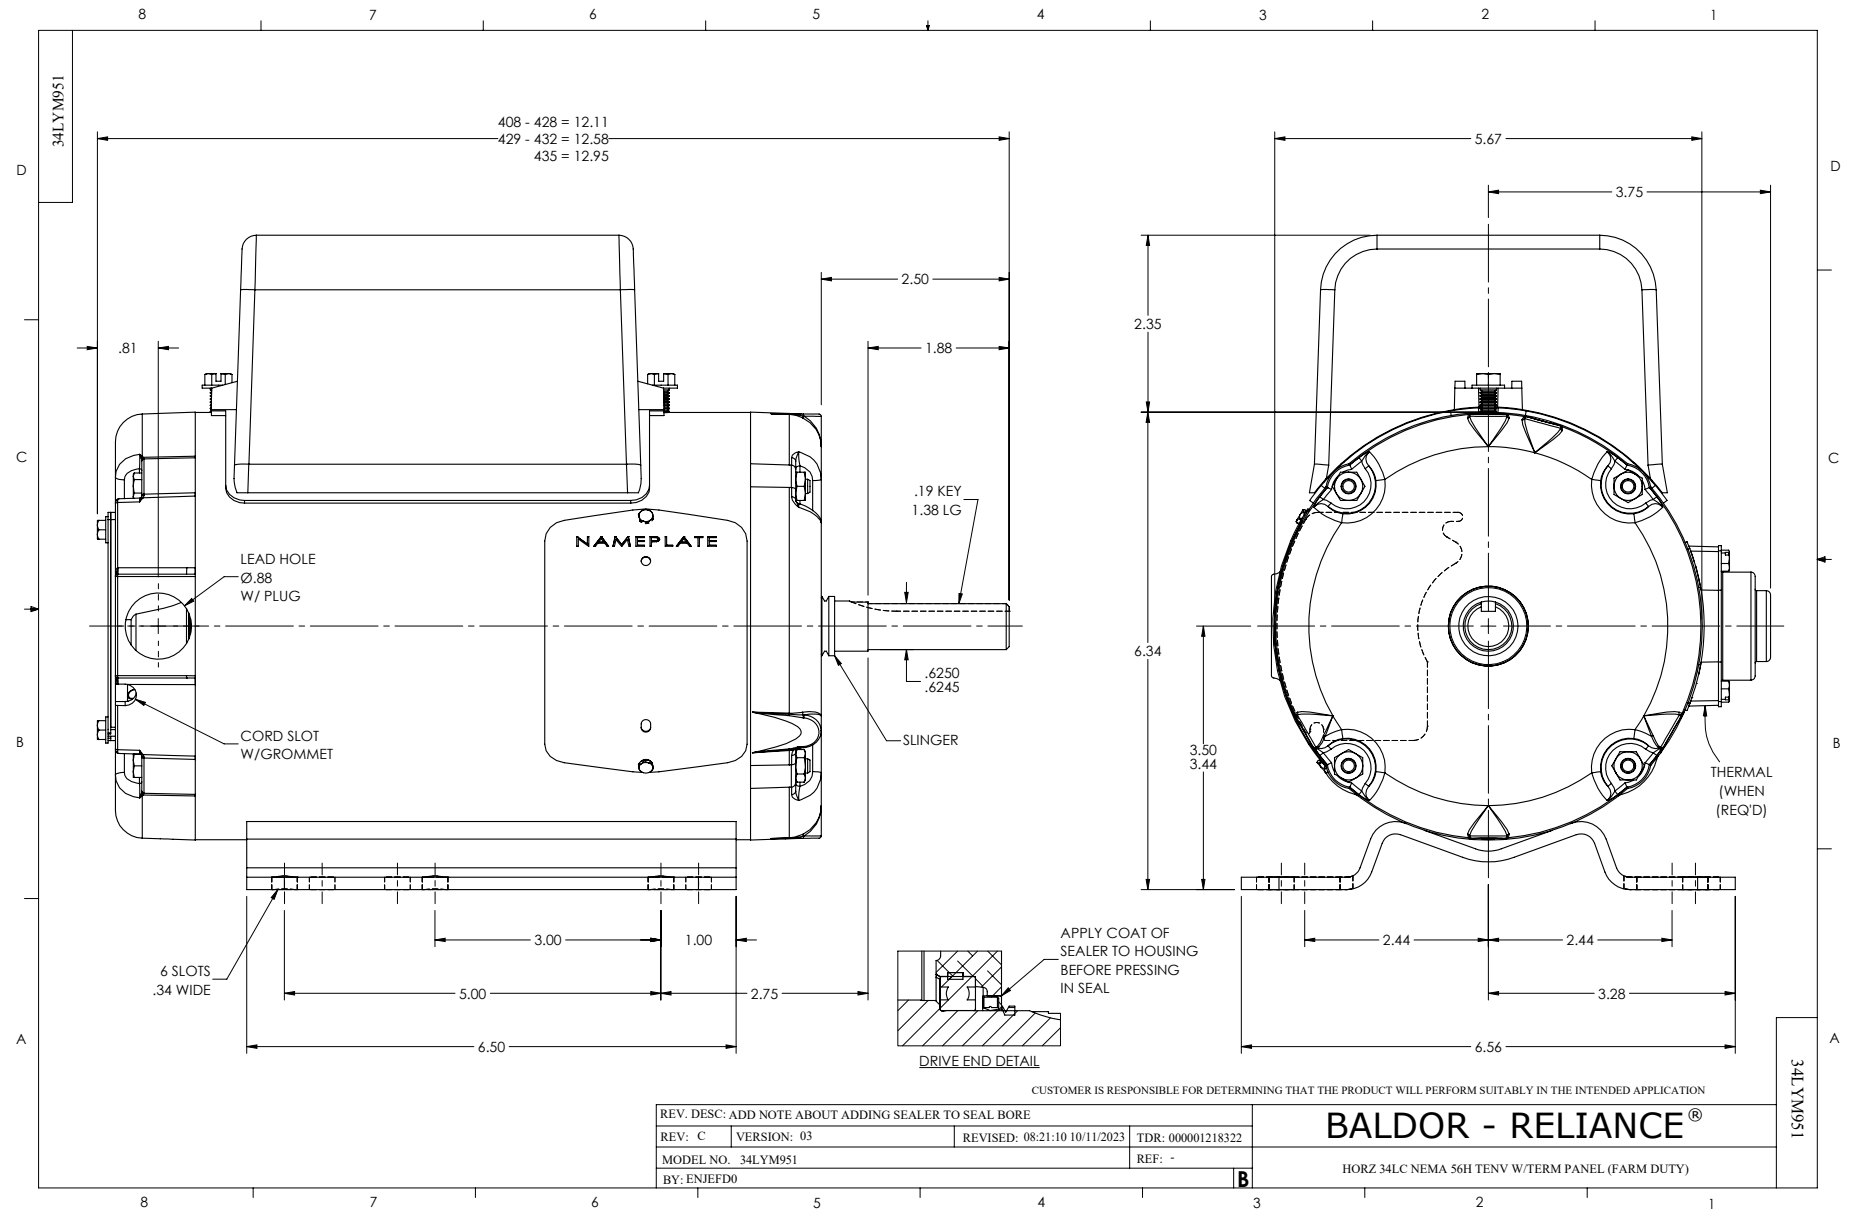

CD0320

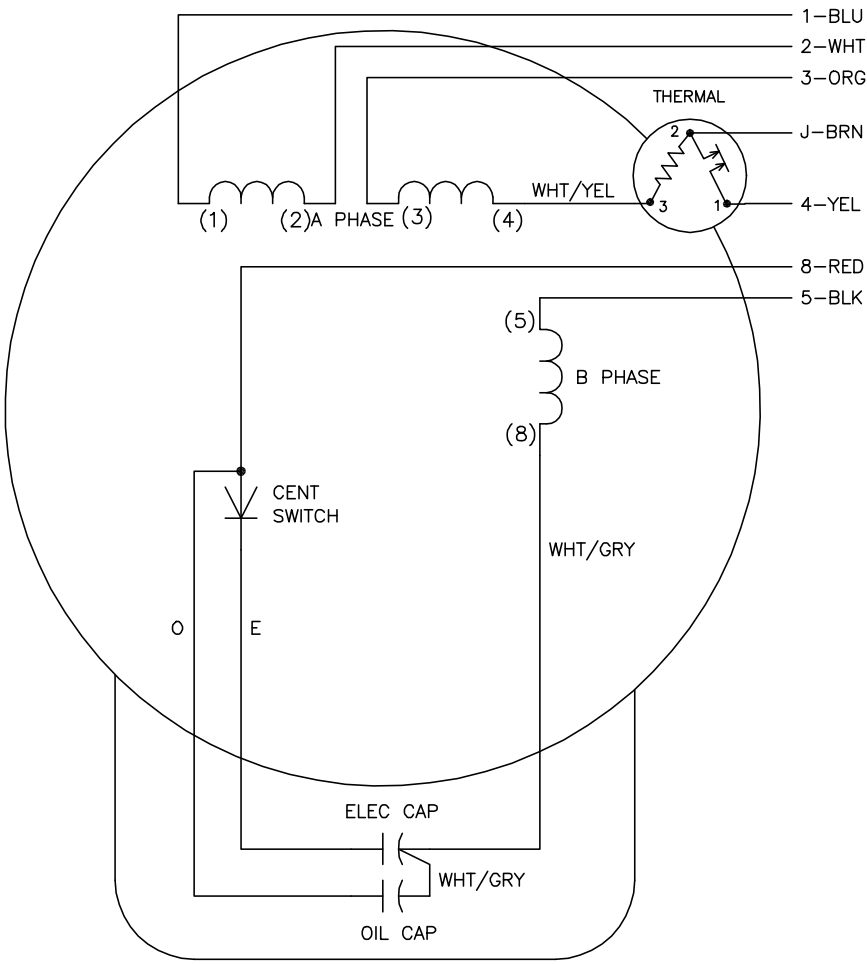

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1,8	4	2,3,5	J
HIGH OPP	1,5	4	2,3,8	J
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
- 1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 - 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 - 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0320

REV. DESC: ADD INTERNAL CONNECTION TO HELP MANUFACTURING		
REV. LTR: G	VERSION: 01	TDR: 000000941594
FILE: \AAA\00007\422	REVISED: 02: 21:00 08/28/2015	BY: ENALEMO
MTL: —	© □	

BALDOR

TYPE LC, DV, REV, THERMAL, B PH AMPS THRU HTR HVC, 7 LEAD
SH 1 of 1