



Customer information packet

FDEM4107T-5

46M 2P TEFC HOR 284TS FARM DUTY SE

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	284TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	23.000 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	23.0 a
Insulation Class	F

Part detail

Revision	L
Type	AC
Mech. spec.	09L813
Base	
Status	PRD/A
Elec. spec.	09WGT369
Layout	09LYL813
Eff. date	12-16-2025
CD Diagram	CD0006
Poles	02
Leads	3#10
Proprietary	False
Created date	06-14-2018

Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0946M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	24.77 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3525 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3126L									
CAT.NO.	FDEM4107T-5								
SPEC.	09L813T369G1								
HP	25								
VOLTS	575								
AMP	23								
RPM	3525								
FRAME	284TS		HZ	60			PH	3	
SER.F.	1.15	CODE	J	DES	A	CL	F		
NEMA-NOM-EFF	91.7	PF	88						
RATING	40C AMB-CONT								
CC	010A								
DE	6311		ODE	6208					
ENCL	TEFC	SN							

AC Induction Motor Performance Data

Record # 59038

Typical performance - not guaranteed values

Winding: 09WGT369-R001				Type: 0946M		Enclosure: TEFC	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		25		Full Load Torque		37.15 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		23		Breakdown Torque		120 LB-FT	
R.P.M.		3525		Pull-up Torque		71.02 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		A		KVA Code		J	
Service Factor (S.F.)		1.15		Starting Current		200 A	
NEMA Nom. Eff.		91.7		Power Factor		88	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		84°C	
S.F. Amps				Temp. Rise @ S.F. Load		103°C	
				Locked-rotor Power Factor		29.4	
				Rotor inertia		1.17 LB-FT2	

Load Characteristics 575 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	54	75	84	88	90	90	89
Efficiency	87	91.3	92.2	91.9	91.1	90.2	91.4
Speed	3582	3565	3550	3529	3509	3487	3517
Line amperes	9.93	13.56	18.15	23.1	28.66	34.35	26.4


ABB Motors and Mechanical Inc.


WINDING # 09WGT369

Typical performance - not guaranteed values.




25 HP 3 PH 60 HZ 3525 RPM 575 V 0946M

TORQUES (LB-FT): PO=120 PU=71.02 LR=85.16 LRA=200

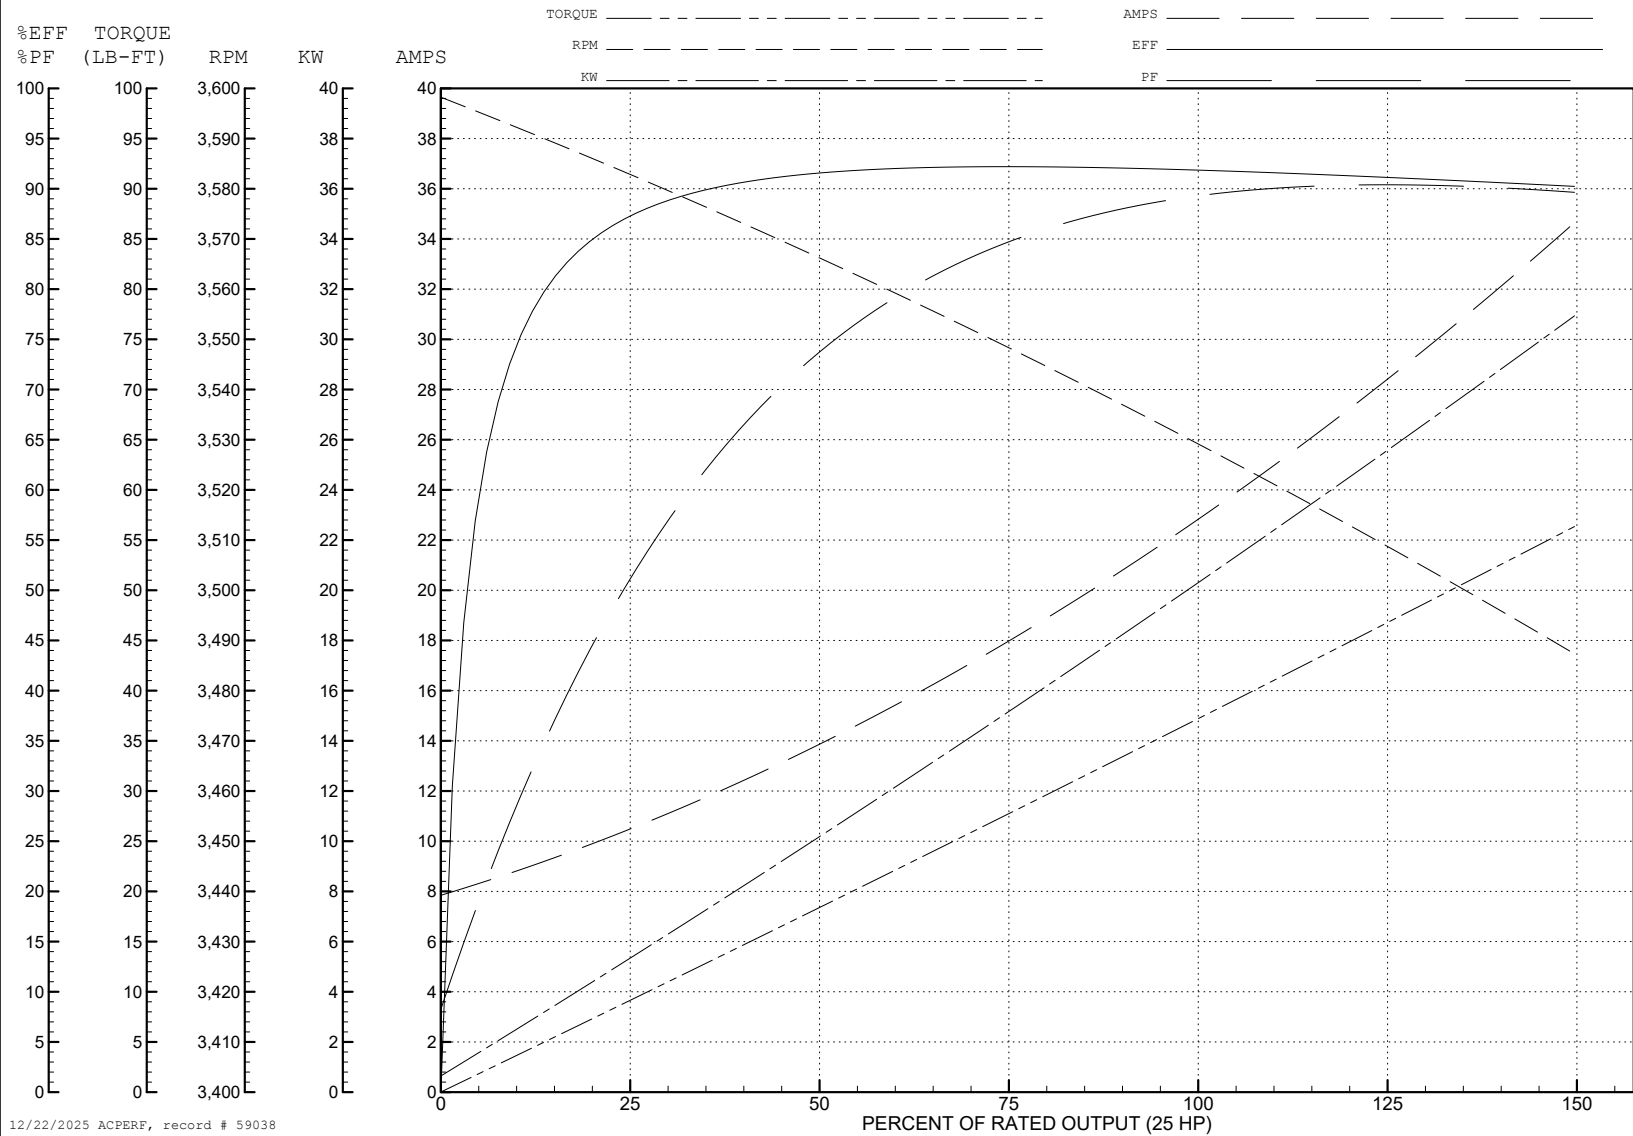

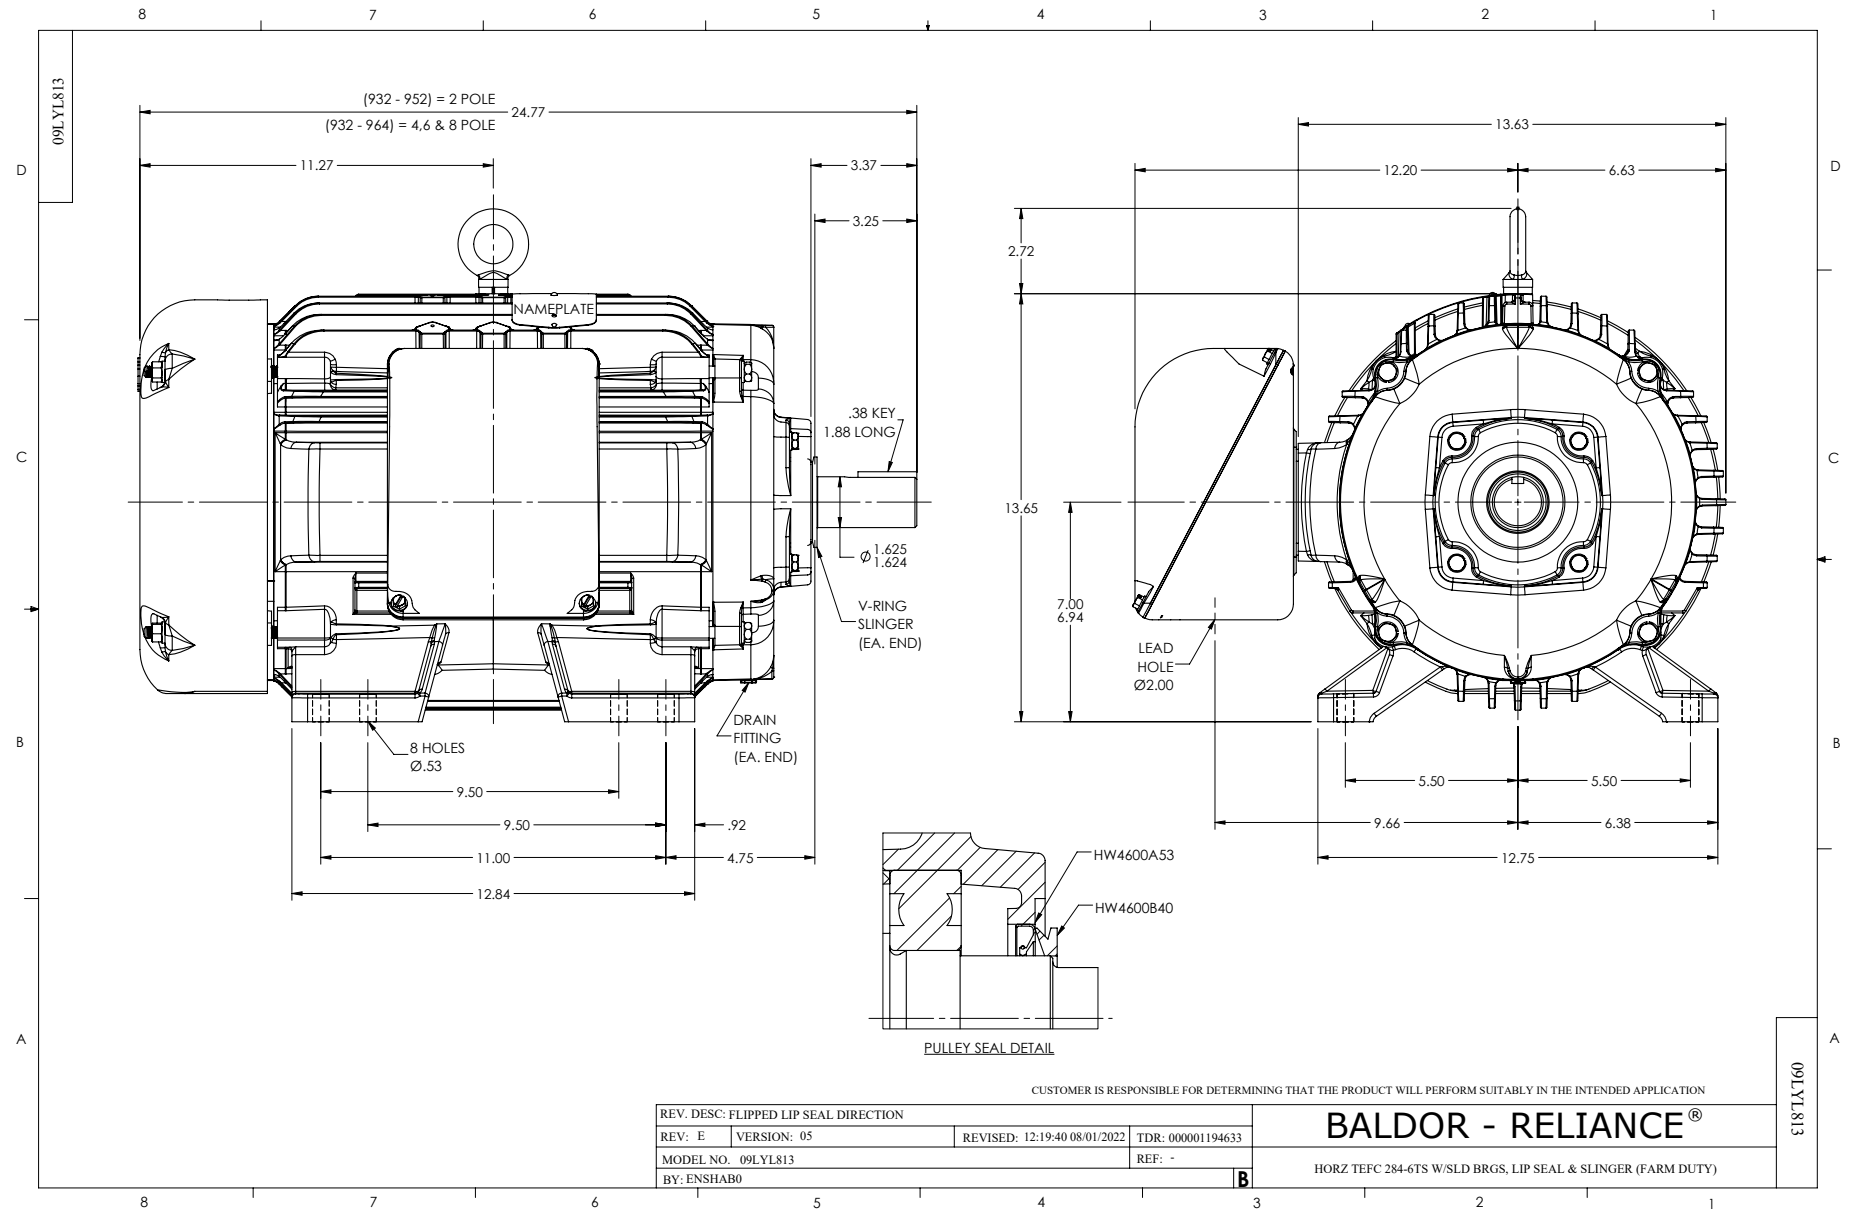

CD0006

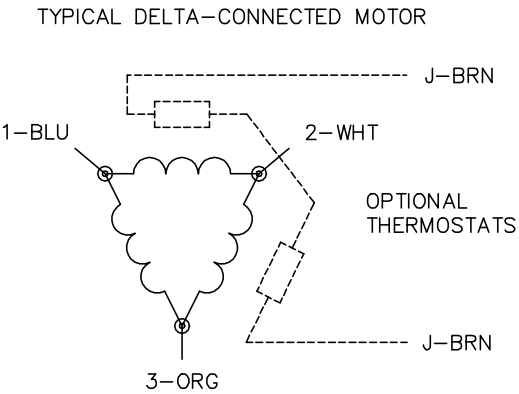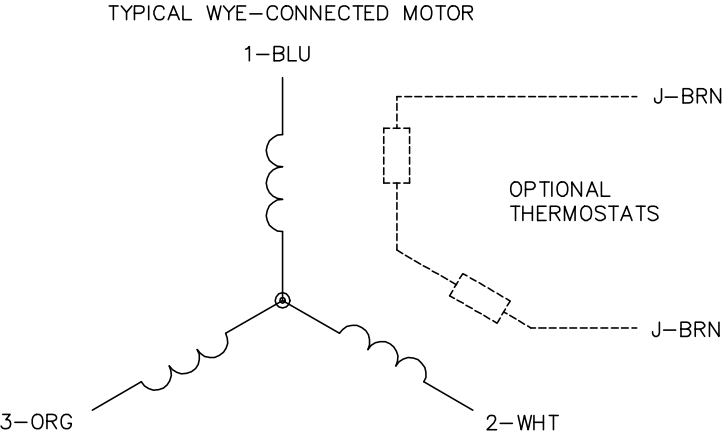

- NOTES:
1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1