



Customer information packet

GNEM3311T-G

7.5HP, 1770//1460RPM, 3PH, 60//50HZ, 213T, 37

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	213T
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 50 HZ 7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CE UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	22.800 A @ 190.0 V 9.700 A @ 460.0 V 20.400 A @ 208.0 V 19.700 A @ 208.0 V 19.400 A @ 230.0 V 11.400 A @ 380.0 V
Design Code	B

Part detail

Revision	L
Type	AC
Mech. spec.	37J839
Base	
Status	PRD/A
Elec. spec.	37WGZ617
Layout	37LYJ839
Eff. date	06-26-2025
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	02-26-2017

Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.7 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3738M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	17.45 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible

Shaft Slinger Indicator	No Slinger
Speed	1460 rpm
	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4304L									
CAT.NO.	GNEM3311T-G								
SPEC.	37J839Z617G1								
HP	7.5/5.5KW					PH	3		
VOLTS	208-230/460//190/380								
AMPS	20.4-19.4/9.7//22.8/11.4								
R.P.M. (1/MIN)	1770//1460					WT.	64KG		KG
FRAME	213T		HZ	60//50			I.P.	23	
SER.F.	1.15	CODE	J	DES.	B	CLASS	H		
NOM.EFF.	91.7//89.6		% (100%)						
P.F.	80	IC01, 10:1 VT							
RATING	40C AMB-s1 CONT				CC	010A			
DE	6307		ODE	6206					
ENCL	OPSB	SN							
	IE3-50HZ 91.2(75%),90.4(50%)								
	IE3-60HZ 91.8(75%),90.4(50%)								

AC Induction Motor Performance Data

Record # 62756

Typical performance - not guaranteed values

Winding: 37WGZ617-R002		Type: 3738M	Enclosure: OPSB		
Nameplate Data		380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)	7.5	Full Load Torque	27.05 LB-FT		
Volts	208-230/460//190/380	Start Configuration	direct on line		
Full Load Amps	20.4-19.4/9.7//22.8/11.4	Breakdown Torque	76.52 LB-FT		
R.P.M.	1770//1460	Pull-up Torque	40.37 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque	48.4 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	71.13 A
Service Factor (S.F.)	1.15			No-load Current	4.53 A
NEMA Nom. Eff.	91.7	Power Factor	80	Line-line Res. @ 25°C	1.33 Ω
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load		44°C
S.F. Amps			Temp. Rise @ S.F. Load		56°C
				Locked-rotor Power Factor	37.1
				Rotor inertia	0.934 LB-FT2

Load Characteristics 380 V, 50 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	46	69	79	83	85	85	84
Efficiency	87.8	91	91.6	90.8	89.4	87.7	90
Speed	1492	1484	1475	1465	1455	1441	1459
Line amperes	5.14	6.76	8.84	11.35	14.06	17.08	13


ABB Motors and Mechanical Inc.

WINDING # 37WGZ617

Typical performance - not guaranteed values.

7.5 HP 3 PH 50 HZ 1465 RPM 380 V 3738M

TORQUES (LB-FT) : PO=76.52 PU=40.37 LR=48.4 LRA=71.13

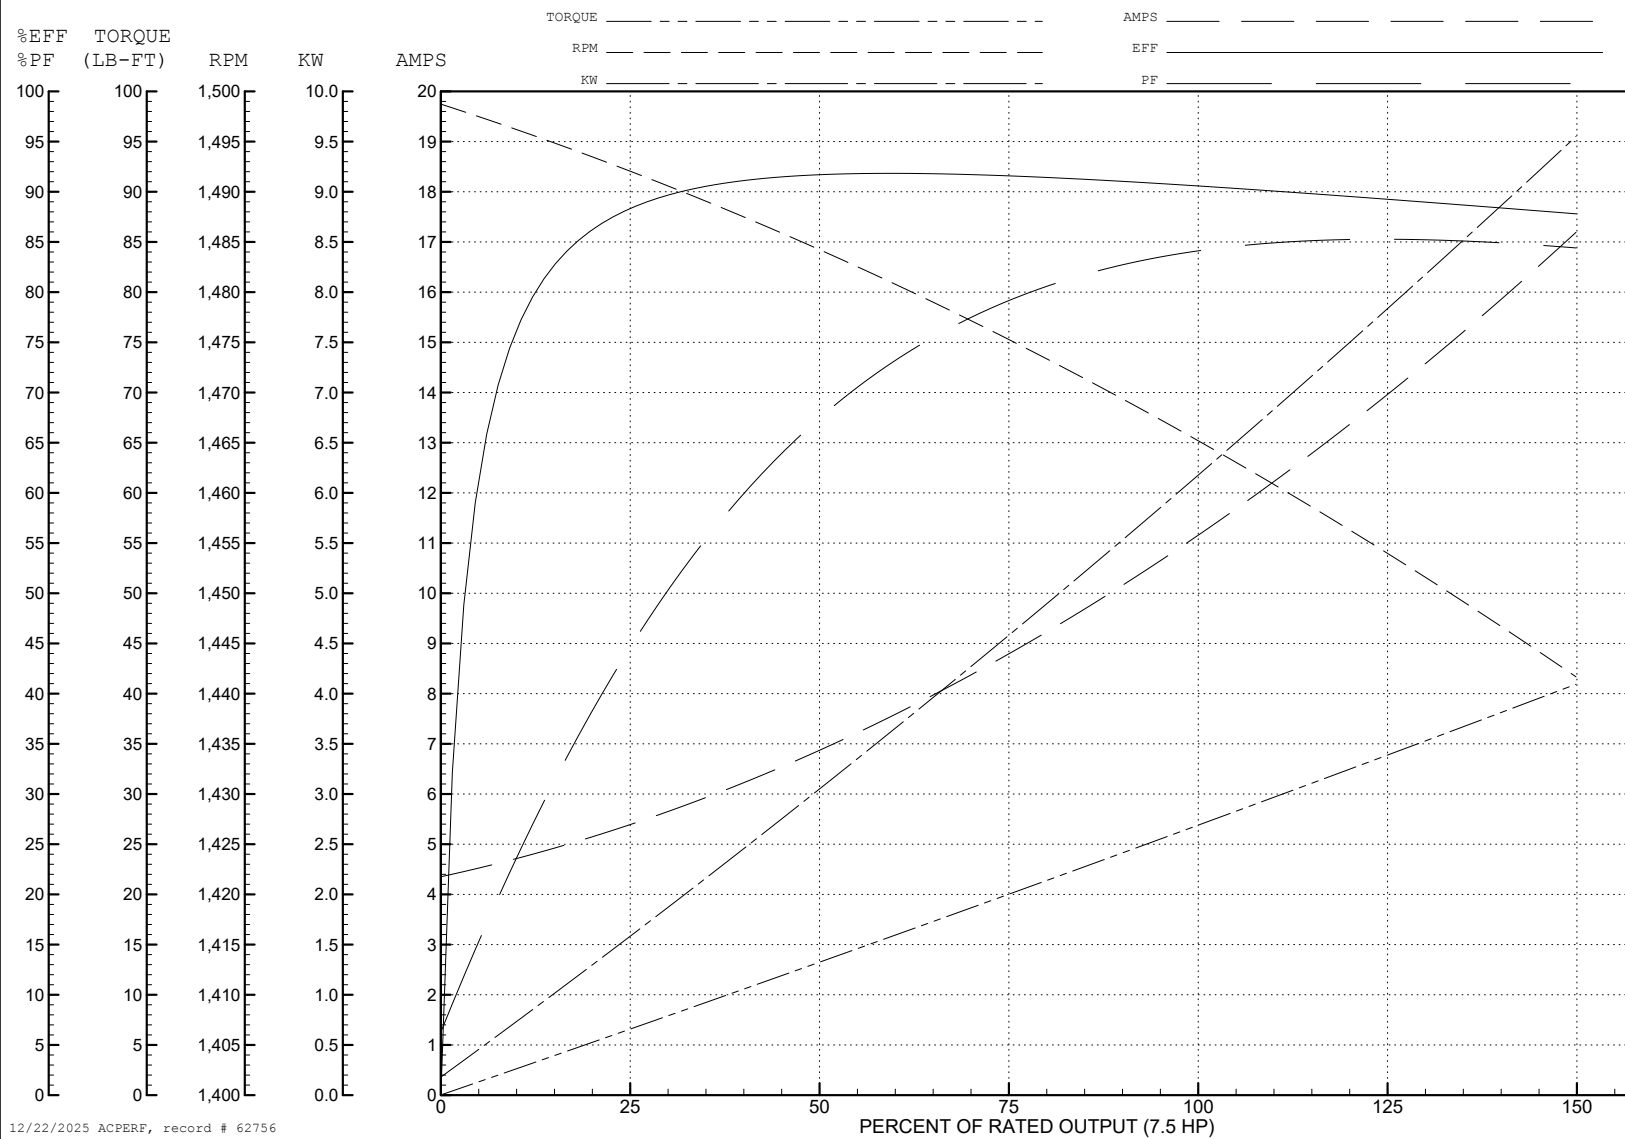

AC Induction Motor Performance Data

Record # 95868

Typical performance - not guaranteed values

Winding: 37WGZ617-R002		Type: 3738M	Enclosure: OPSB			
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)	7.5	Full Load Torque	22.4 LB-FT			
Volts	208-230/460//190/380	Start Configuration	direct on line			
Full Load Amps	20.4-19.4/9.7//22.8/11.4	Breakdown Torque	80.4 LB-FT			
R.P.M.	1770//1460	Pull-up Torque	39.2 LB-FT			
Hz	60//50	Phase	3	Locked-rotor Torque	47 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	73.5 A	
Service Factor (S.F.)	1.15	No-load Current	4.63 A			
NEMA Nom. Eff.	91.7	Power Factor	80	Line-line Res. @ 25°C	1.33 Ω	
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load			34°C
S.F. Amps				Temp. Rise @ S.F. Load		42°C
			Locked-rotor Power Factor			37.1
			Rotor inertia			0.934 lb-ft²

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	40	62	73	80	82	84	81
Efficiency	86	90	92	92	91	90	91.4
Speed	1793	1786	1779	1770	1762	1752	1765
Line amperes	5.07	6.26	7.81	9.69	11.71	13.92	10.9

ABB Motors and Mechanical Inc.

WINDING # 37WGZ617

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 1770 RPM 460 V 3738M

TORQUES (LB-FT): PO=80.4 PU=39.2 LR=47 LRA=73.5

