



Customer information packet

HBEM2276T

54M 6P TEFC HOR 254T

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	22.000 A @ 230.0 V 23.000 A @ 208.0 V 11.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Electrically Isolated Bearings
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	H
Type	AC
Mech. spec.	09T115
Base	
Status	PRD/A
Elec. spec.	09WGT118
Layout	09LYT115
Eff. date	12-06-2024
CD Diagram	CD0005
Poles	06
Leads	9#12
Proprietary	False
Created date	01-06-2022

High Voltage Full Load Amps	11.0 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0954M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.36 IN
Power Factor	70
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

NP4312A01A01L

Page 4 of 8

AC Induction Motor Performance Data

Record # 47558

Typical performance - not guaranteed values

Winding: 09WGT118-R002			Type: 0954M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5		Full Load Torque		33.2 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		22/11		Breakdown Torque		113 LB-FT	
R.P.M.		1180		Pull-up Torque		41.3 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		57.4 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		74.8 A
Service Factor (S.F.)		1.15		No-load Current		6.06 A	
NEMA Nom. Eff.		91	Power Factor	70	Line-line Res. @ 25°C		0.87037 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		36°C	
S.F. Amps				Temp. Rise @ S.F. Load		42°C	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	52	63	70	74	75	72
Efficiency	83.2	89.4	90.9	91.1	90.7	89.9	90.9
Speed	1196.5	1192.4	1188.3	1183.7	1178.7	1173.2	1181
Line amperes	6.49	7.59	9.09	11	13.1	15.5	12.3


ABB Motors and Mechanical Inc.


WINDING # 09WGT118

Typical performance - not guaranteed values.


7.5 HP 3 PH 60 HZ 1180 RPM 460 V 0954M

TORQUES (LB-FT): PO=113 PU=41.3 LR=57.4 LRA=74.8

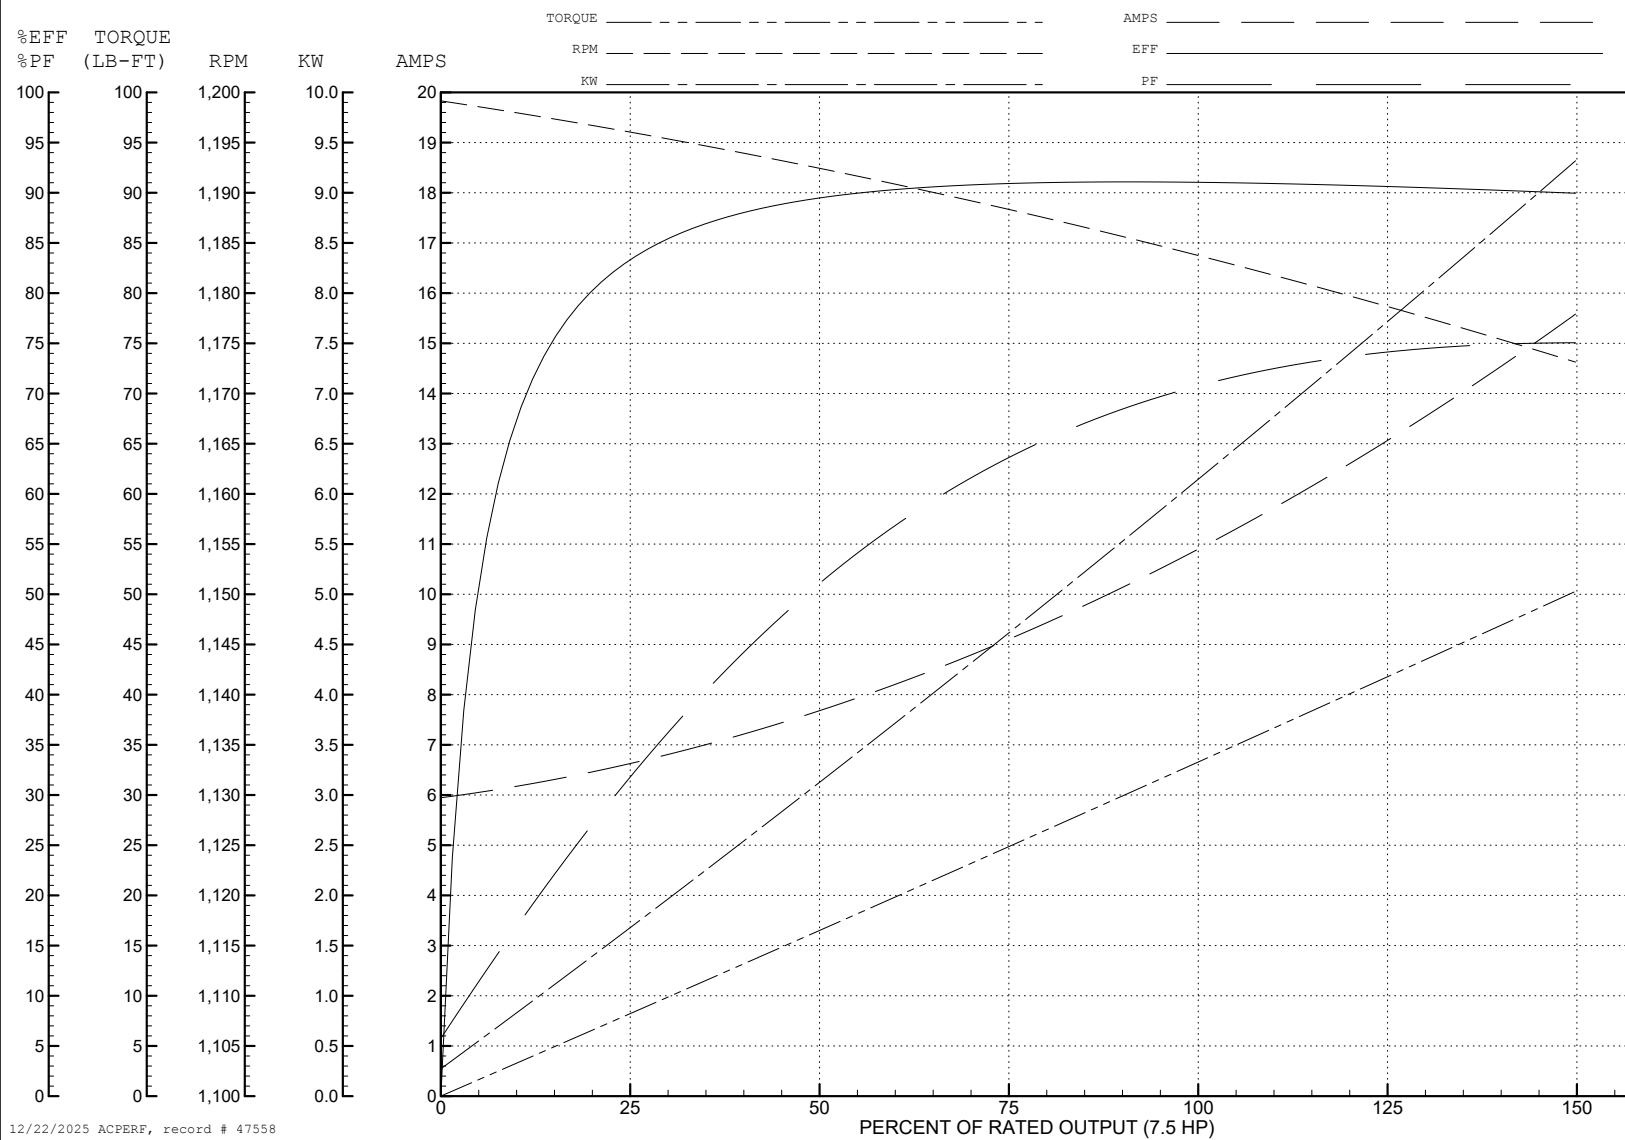

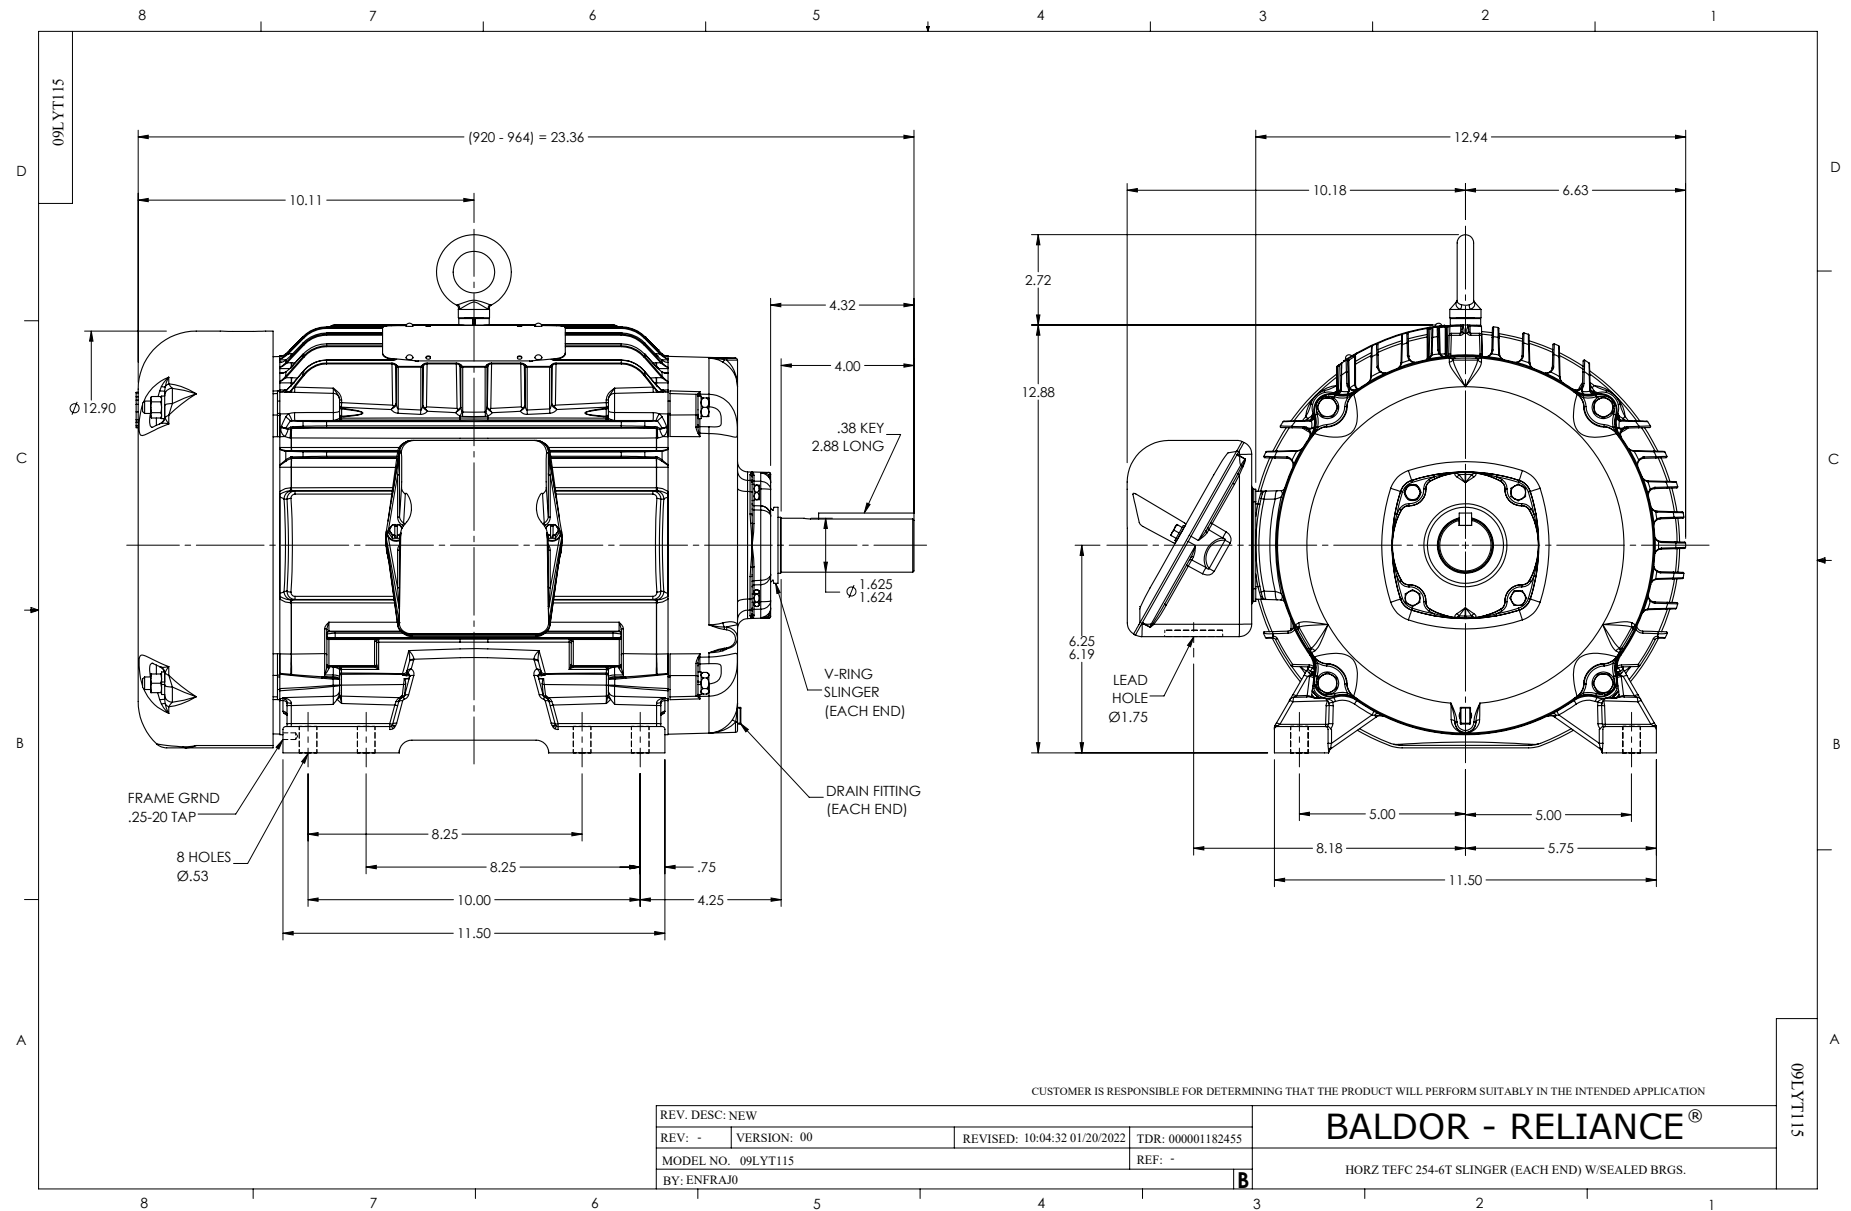

CD0005

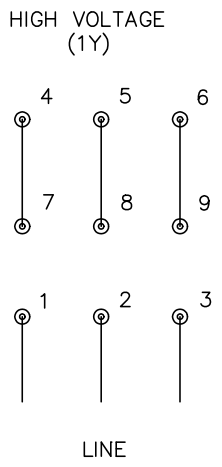

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005