



Customer information packet

IDM2333T-5

44M 4P TEBC HOR 256TC T'STAT INV DUTY

Class - None

Division - Not Applicable

Specifications

Enclosure	TEBC
Frame	256TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	BLOWER
Current @ Voltage	14.600 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	14.6 a
Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	H

Part detail

Revision	H
Type	AC
Mech. spec.	09T110
Base	
Status	PRD/A
Elec. spec.	09WGT124
Layout	09LYT110
Eff. date	08-28-2025
CD Diagram	CD0006
Poles	04
Leads	3#12
Proprietary	False
Created date	03-19-2019

Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5000 rpm
Motor Lead Quantity/Wire Size	3 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	29.41 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1163L									
CAT NO	IDM2333T-5								
SPEC.	09T110T124G1								
FRAME	256TC		HP		15 TE				
VOLTS	575								
MAG CUR	6.1			FLA		14.6			
RPM	1765			RPM MAX		5000			
HZ	60		PH	3		CLASS		H	
SER.F.	1.00		DES	A		SL HZ		1.2	
NEMA-NOM-EFF	92.4		WK2	1.93					
BLWR V		PH		HZ		A			
RATING	40C AMB-CONT								
DE BRG	6309			ODE BRG		6208			
CC	010A	SN							
	1000:1 CT, 1000:1 VT								

NP VOLTS	575	MAX SAFE RPM	5000	WYE CONN. EQ. CT. OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	14.6	Base Volt	575	R1	0.457	X1	1.770
HP	15HP	NL AMPS	6.1	R2	0.372	X2	2.090
BASE SPEED	1765	Slips (Hz)	1.17			XM	52.900
PHASE/HZ	3/60	WK ² (lb-ft ²)	1.92				

Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1765	15.0	44.5	575	60	14.6
Max Speed	2646	15.0	29.7	575	90	13.9
Min Speed	0	0.0	44.5	32.31	1.17	14.6

Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.0	575	60	6.1
1/4	1791	3.7	10.8	575	60	6.9
1/2	1783	7.5	22.1	575	60	8.8
3/4	1774	11.3	33.3	575	60	11.6
Full Load	1765	15.0	44.5	575	60	14.6
O/L	1730	29.9	90.8	575	60	29.1

Blower Data	Volts	Ph/Hz	FL Amps	L/R Amps	Frame	CFM

Remarks: Calculated Data
Vector PWM Inverter Duty

BALDOR

A MEMBER OF THE ABB GROUP

DR BY

CK BY

APP BY

DATE

BR

BR

BR

3/28/2017

A-C MOTOR

PERFORMANCE


CURVES

09WGT124

Page 5 of 9

NP VOLTS	575	MAX SAFE RPM	5000	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)
NP AMPS	14.6	Base Volt	575	R1 0.457 X1 1.770
HP	15HP	NL AMPS	6.05	R2 0.372 X2 2.090
BASE SPEED	1765	Slips (Hz)	1.17	XM 52.900
PHASE/HZ	3/60	Wk2 (lb-ft2)	1.92	

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

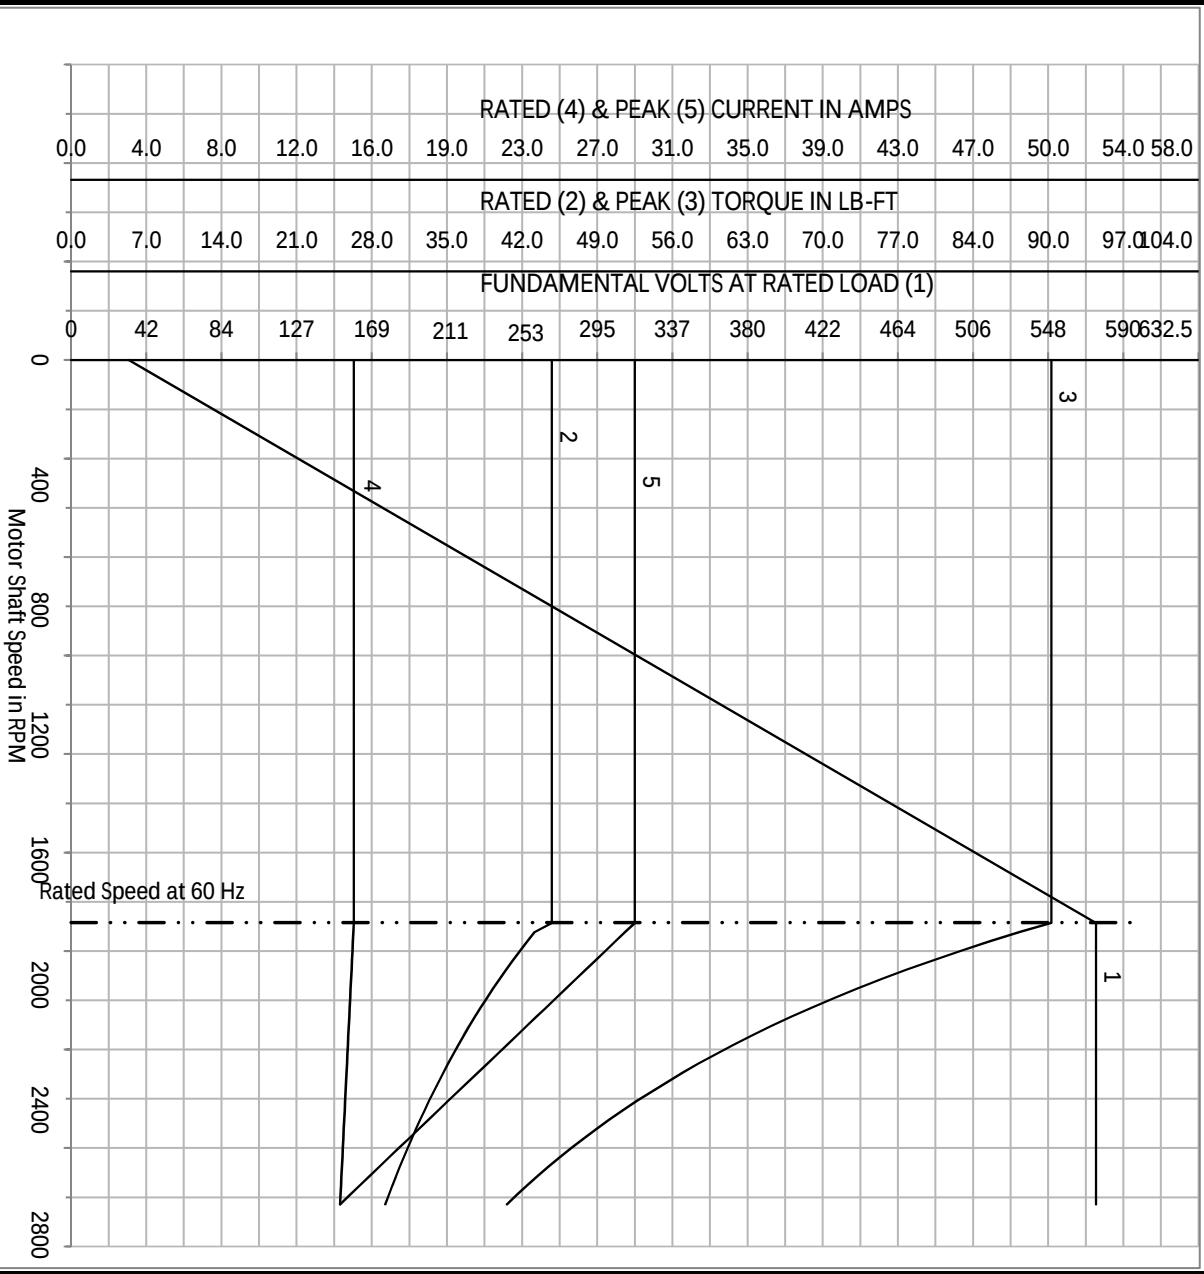

Calculated Data
Data Valid For Nameplate Speed Range only

BALDOR
A MEMBER OF THE ABB GROUP


DR BY BR
CK BY BR
APP BY BR
DATE 3/28/2017

A-C MOTOR
PERFORMANCE
CURVES

09WG1124

NP VOLTS	575	MAX SAFE RPM	5000	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)
NP AMPS	14.6	Base Volt	575	R1 0.457 X1 1.770
HP	15HP	NL AMPS	6.05	R2 0.372 X2 2.090
BASE SPEED	1765	Slips (Hz)	1.17	XM 52.900
PHASE/HZ	3/60	WK2 (lb-ft2)	1.92	

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

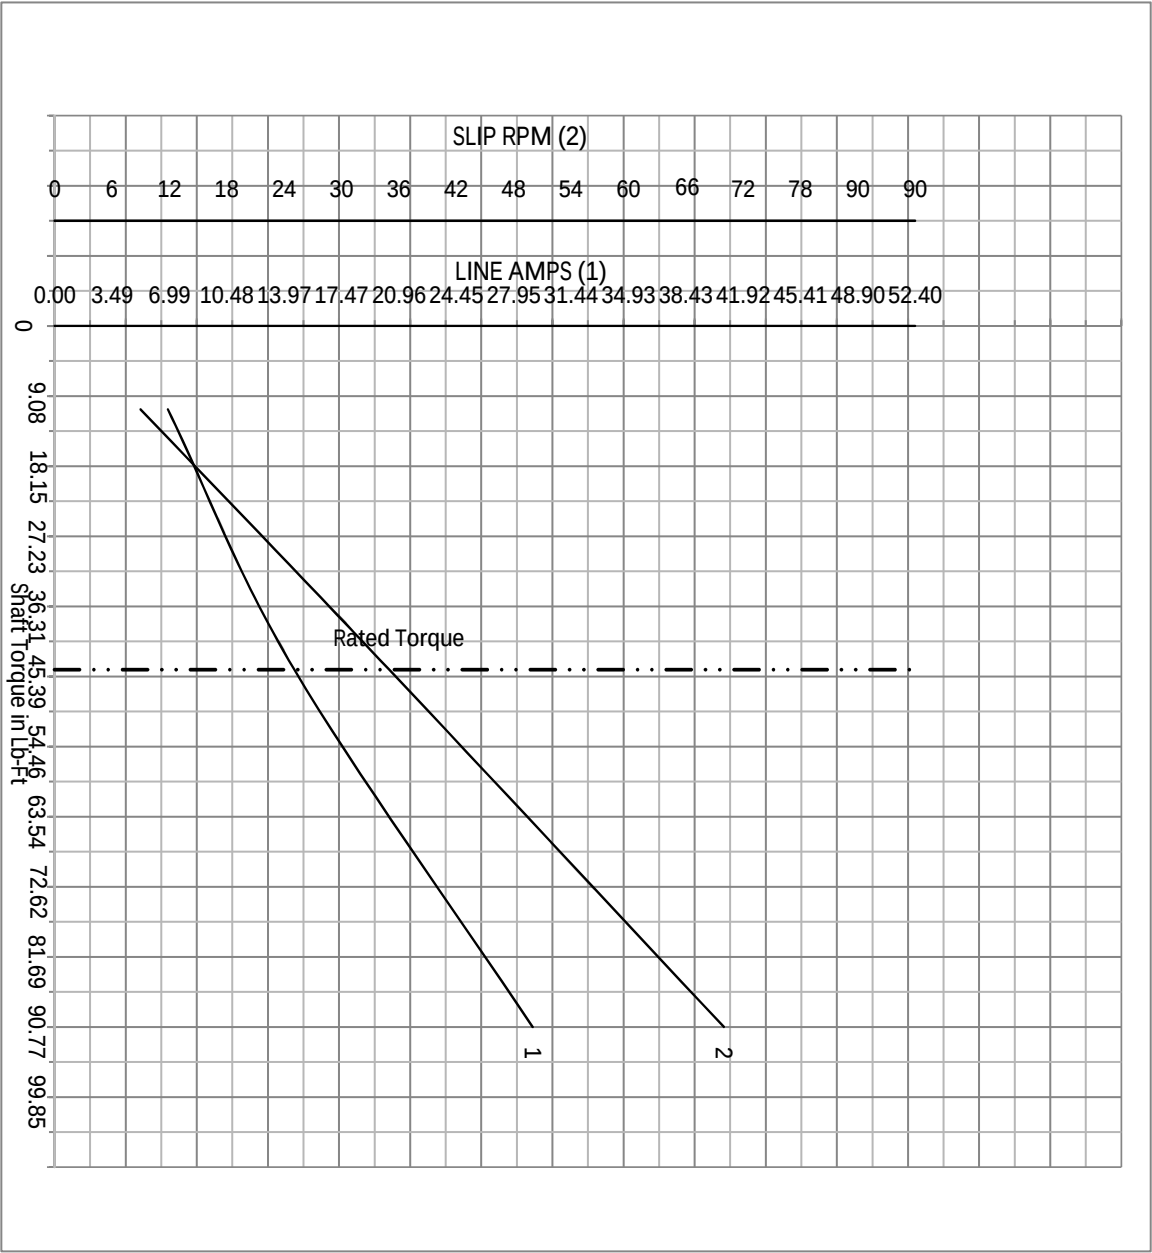


Calculated Data




Data Valid For Nameplate Speed Range only



DR BY BR
CK BY
APP BY BR
DATE 3/28/2017
A-C MOTOR PERFORMANCE CURVES
09WG1124

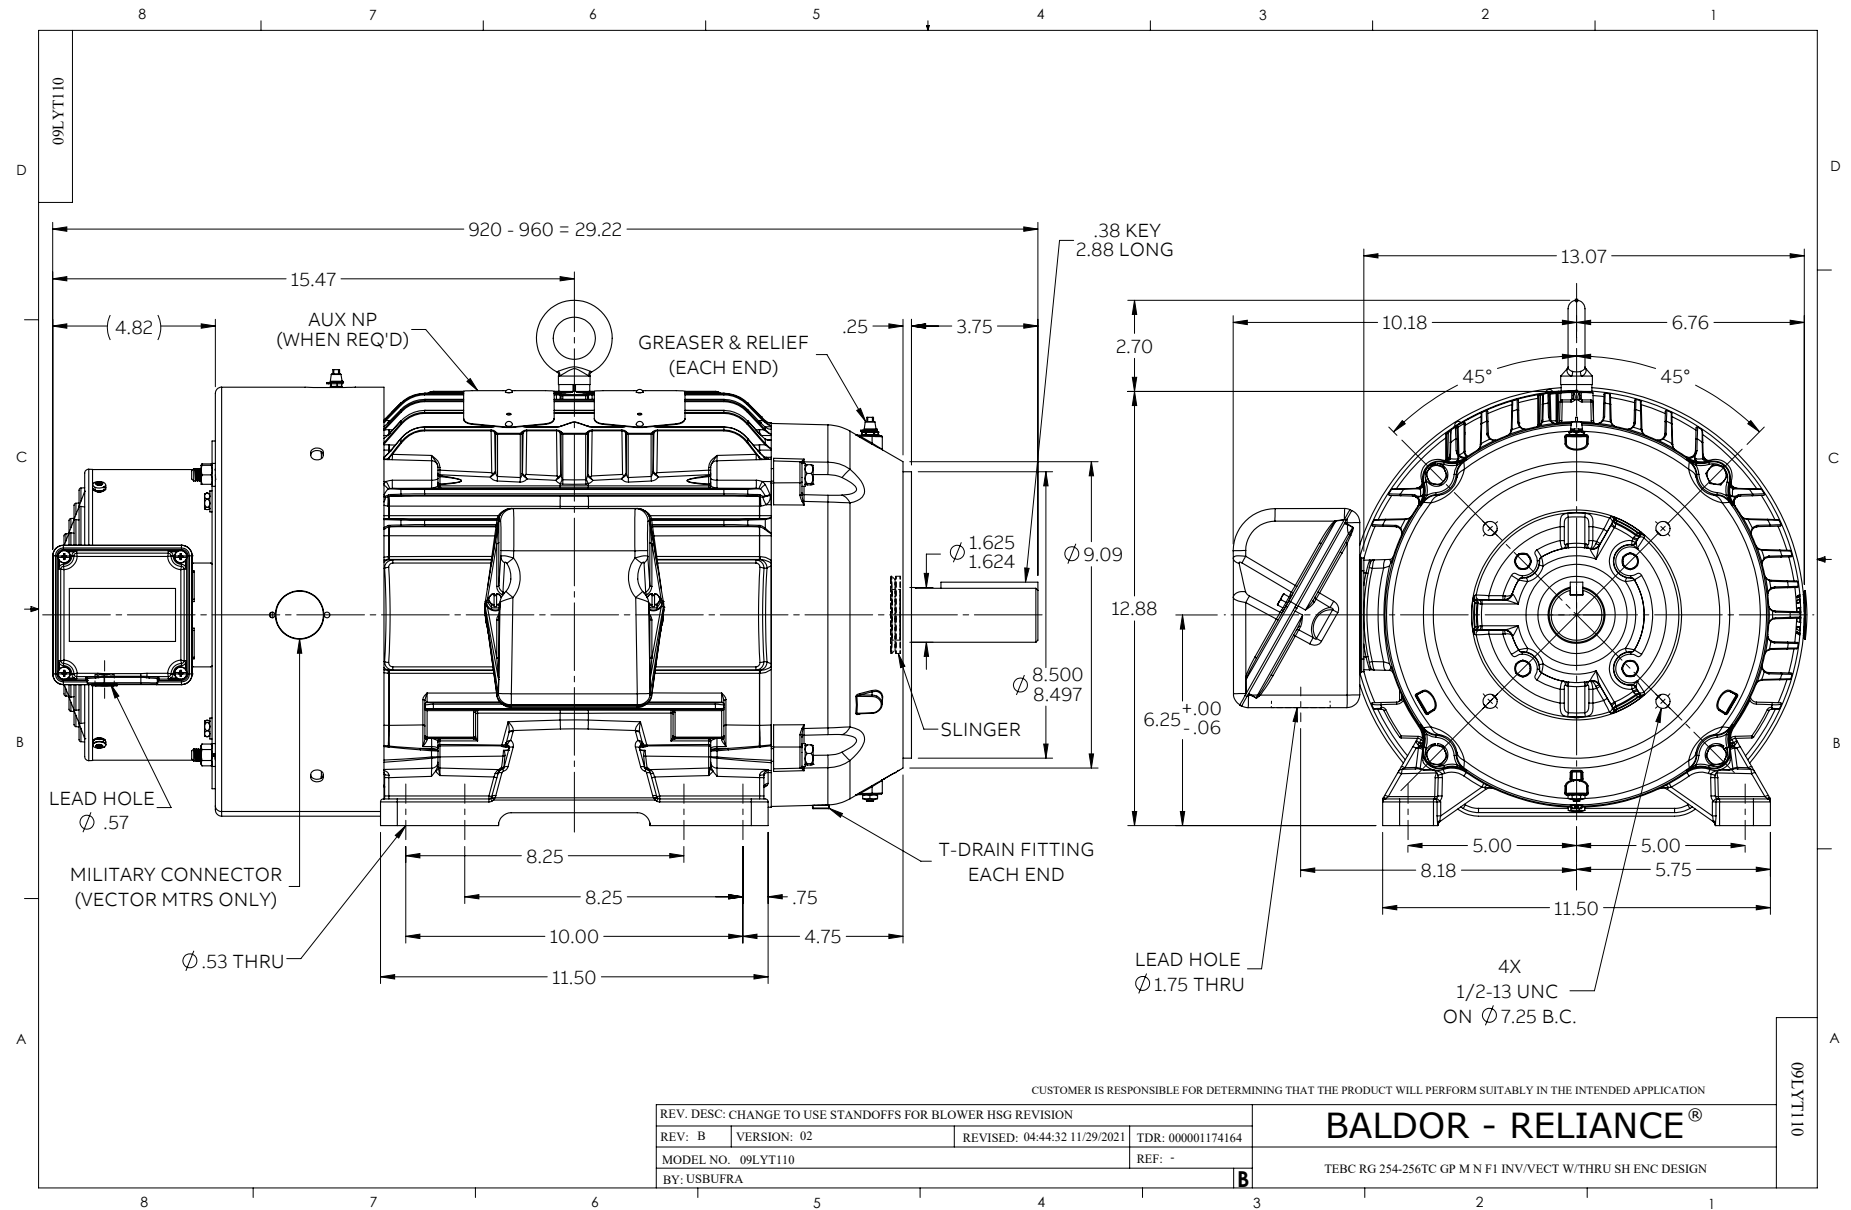

CD0006

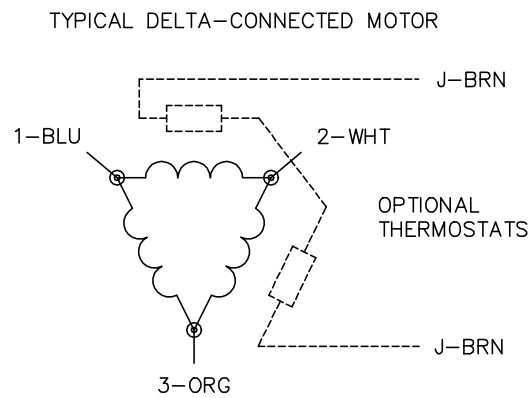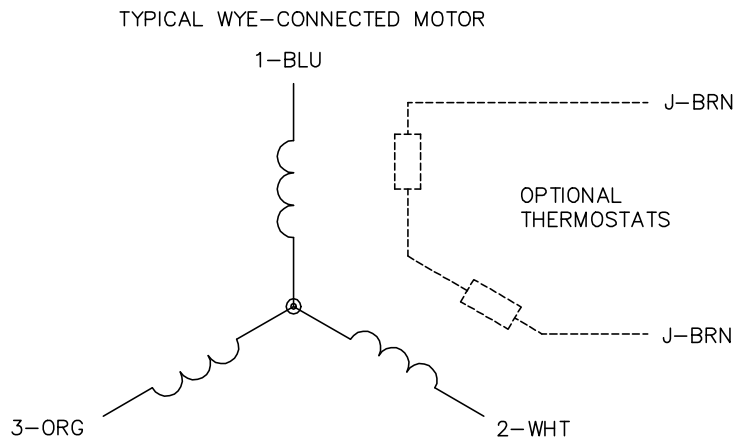

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1