



Customer information packet

IDM3665T

5HP, 1750RPM, 3PH, 60HZ, 184TC, 0640M, TEBC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEBC
Frame	184TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	115V 1-Phase EXT
Current @ Voltage	13.000 A @ 230.0 V 6.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Encoder/Feedback Device
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a

Part detail

Revision	AB
Type	AC
Mech. spec.	06F552
Base	
Status	PRD/A
Elec. spec.	06WGW352
Layout	06LYF552
Eff. date	09-30-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	01-01-0001

Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	6000 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0640M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.71 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4009L											
CAT.NO.	IDM3665T										
SPEC.	06F552W352G1										
FRAME	184TC			H.P.	5 TE						
VOLTS	230/460										
MAG. CUR.	6.8/3.4				F.L. AMPS			13/6.5			
R.P.M.	1750			R.P.M. MAX			6000				
HZ.	60		PH.	3		CLASS	H				
SER.F.	1.00		DES.	B		SL HZ	1.7				
NEMA NOM. EFF.	90.2		WK2	0.37							
BLOWER		V	115		PH	1	HZ	60	AMPS	.26	
RATING	40C AMB-CONT										
DE	6206		ODE	6205							
CC	010A	SN									
	1000:1 CT/VT										

**AC Induction Motor Performance Data**

Record # 20655

Typical performance - not guaranteed values

Winding: 06W/GW352	Type: 0640M	Enclosure: TEFC
---------------------------	--------------------	------------------------

Nameplate Data			General Characteristics at 460 V, 60 Hz: High Volt Connection				
Rated Output (HP)	5		Full Load Torque	15 LB-FT			
Volts	230/460		Start Configuration	DOL			
Full Load Amps	13/6.5		Break Down Torque	50 LB-FT			
R.P.M.	1750		Pull-Up Torque	30 LB-FT			
Hz	60	Phase	Locked-rotor Torque	32 LB-FT			
NEMA Design Code	B	KV/A Code	Starting Current	48 Amps			
Service Factor	1.00		No-load Current	3.4 Amps			
NEMA Nom. Eff.	90.2	P.F.	Line-line Res. @ 25°C.	2.61 Ohms			
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	47°C			
S.F. Amps			Temp. Rise @ S.F. Load				


Load Characteristics at 460 Volts, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	61	75	82	86	88	
Efficiency	84.1	89.4	90.4	90.2	89.4	88.3	
Speed	1789	1778	1767	1755	1742	1729	
Line Amperes	3.6	4.3	5.2	6.4	7.2	9	


Baldor Electric Company Fort Smith, Arkansas



Catalog	IDM3665T	NP VOLTS	230/460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)		
FRAME	184TC	NP AMPS	13/6.5	Base Volts	460	R1	1.200	X1
HP	5 HP	DUTY	Cont	Base AMPS	6.4	R2	0.977	X2
BASE SPEED	1800	MAX SAFE RPM	6000	Slip Hz	1.50	XM		
PHASE/HZ	3/60	AMB ⁸ /C/INSUL	40/H	WK ² (lb-ft ²)	0.372	78.683		

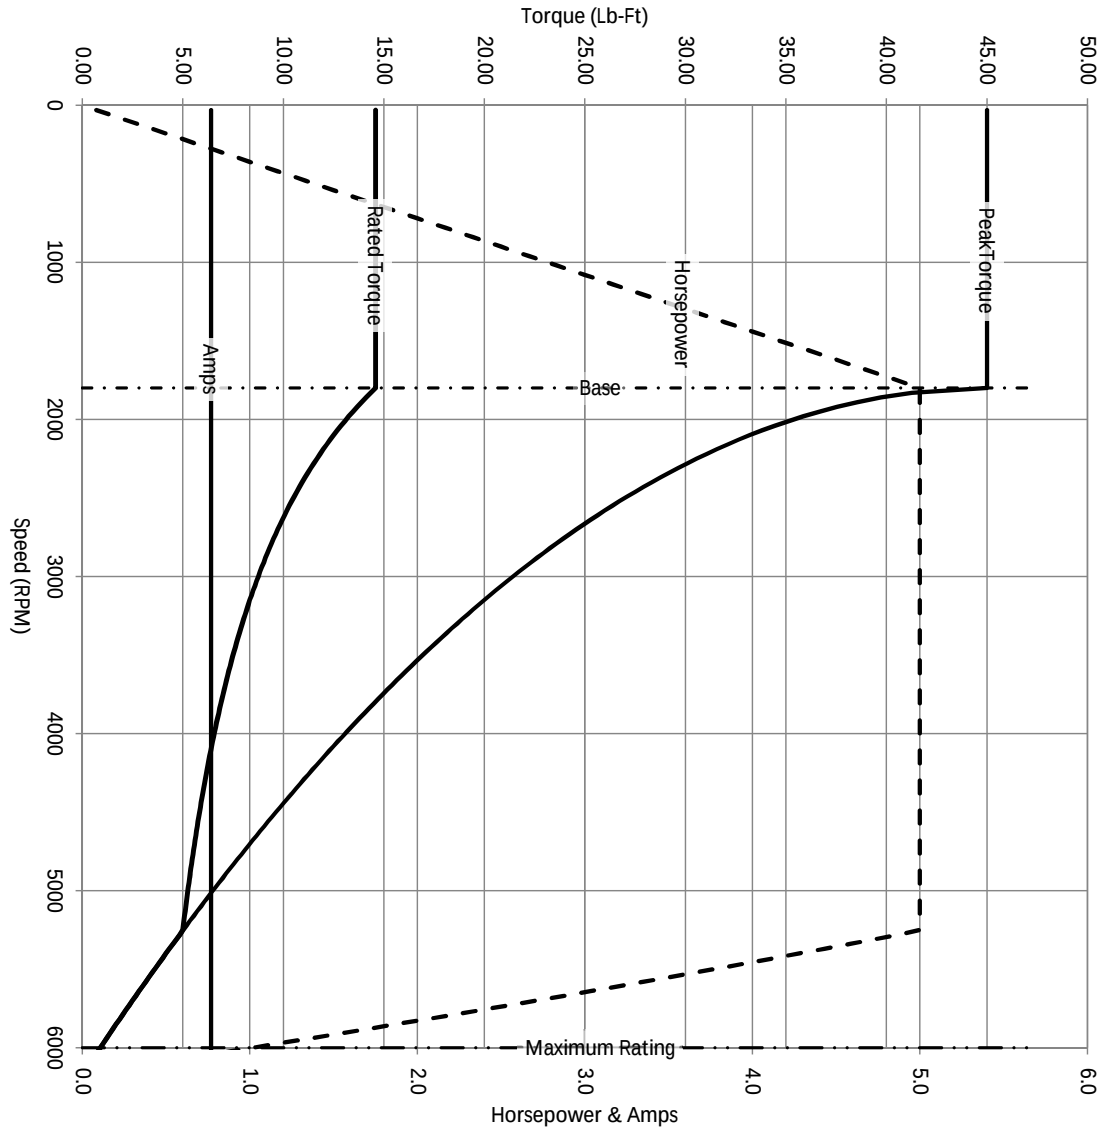

Remarks: Calculated Data



BALDOR
A MEMBER OF THE ABB GROUP

DR BY ENR
CK BY
APP BY ENR
DATE 2/26/2013

A-C MOTOR
PERFORMANCE CURVES

06F552W352G1

ISSUE DATE 2/26/2013

