



Customer information packet

JL3514A

1.5HP, 1725RPM, 1PH, 60HZ, 56J, 3532LC, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.400 A @ 115.0 V 6.700 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	80.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.7 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	B
Type	AC
Mech. spec.	35F974
Base	
Status	PRD/A
Elec. spec.	35WGG377
Layout	35LYF974
Eff. date	03-13-2025
CD Diagram	CD0098A02
Poles	04
Leads	4#18,1#16 #4TH
Proprietary	False
Created date	02-23-2023

KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	4 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3532LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	14.60 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use Eve-Not Valid
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB
Winding Thermal 2	None

Nameplate

NP1257L											
CAT.NO.	JL3514A										
SPEC.	35F974G377										
HP	1.5										
VOLTS	115/230										
AMP	13.4/6.7										
RPM	1725										
FRAME	56J			HZ	60			PH	1		
SER.F.	1.00	CODE	H	DES	L	CL	F				
NEMA-NOM-EFF	80	PF	90								
RATING	40C AMB-CONT										
CC											
DE	6205	ODE	6203								
ENCL	TEFC	SN									

AC Induction Motor Performance Data

Record # 88874

Typical performance - not guaranteed values

Winding: 35WGG377-R002				Type: 3532LC		Enclosure: TEFC		
Nameplate Data				230 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		1.5		Full Load Torque		4.56 LB-FT		
Volts		115/230		Start Configuration		direct on line		
Full Load Amps		13.4/6.7		Breakdown Torque		9.9 LB-FT		
R.P.M.		1725		Pull-up Torque		8.06 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		12.98 LB-FT		
NEMA Design Code		L	KVA Code	H	Starting Current		43.97 A	
Service Factor (S.F.)		1		No-load Current		0.877 A		
NEMA Nom. Eff.		80	Power Factor	90	Line-line Res. @ 25°C		0.517 Ω A Ph 1.32 Ω B Ph	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		67°C
						Locked-rotor Power Factor		91.1
						Rotor inertia		0.232 lb-ft²

Load Characteristics 230 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	95	98	98	98	97	96
Efficiency	68.1	80.4	82.5	81.1	76.9	69.8
Speed	1782	1765	1746	1723	1690	1641
Line amperes	1.83	3.08	4.5	6.1	8.12	10.79


ABB Motors and Mechanical Inc.


WINDING # 35WGG377

Typical performance - not guaranteed values.

1.5 HP 1 PH 60 HZ 1725 RPM 230 V 3532LC

TORQUES (LB-FT): PO=9.9 PU=8.06 LR=12.98 LRA=43.97

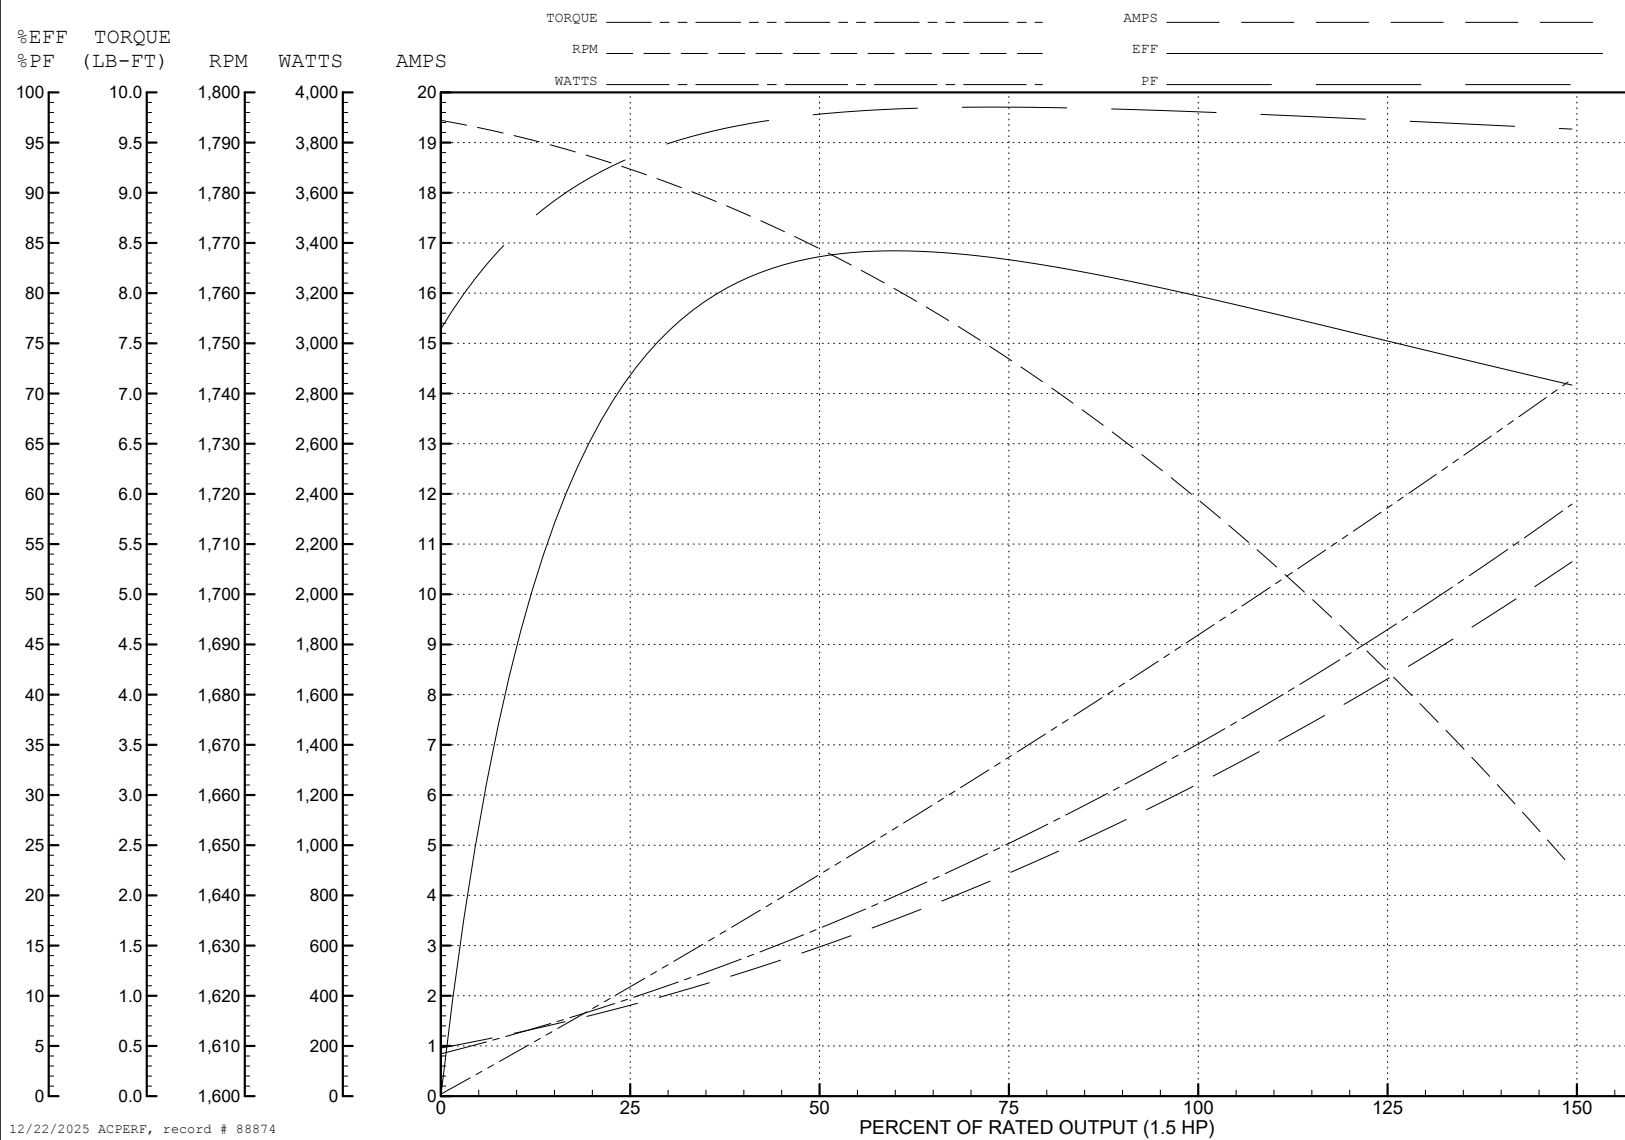

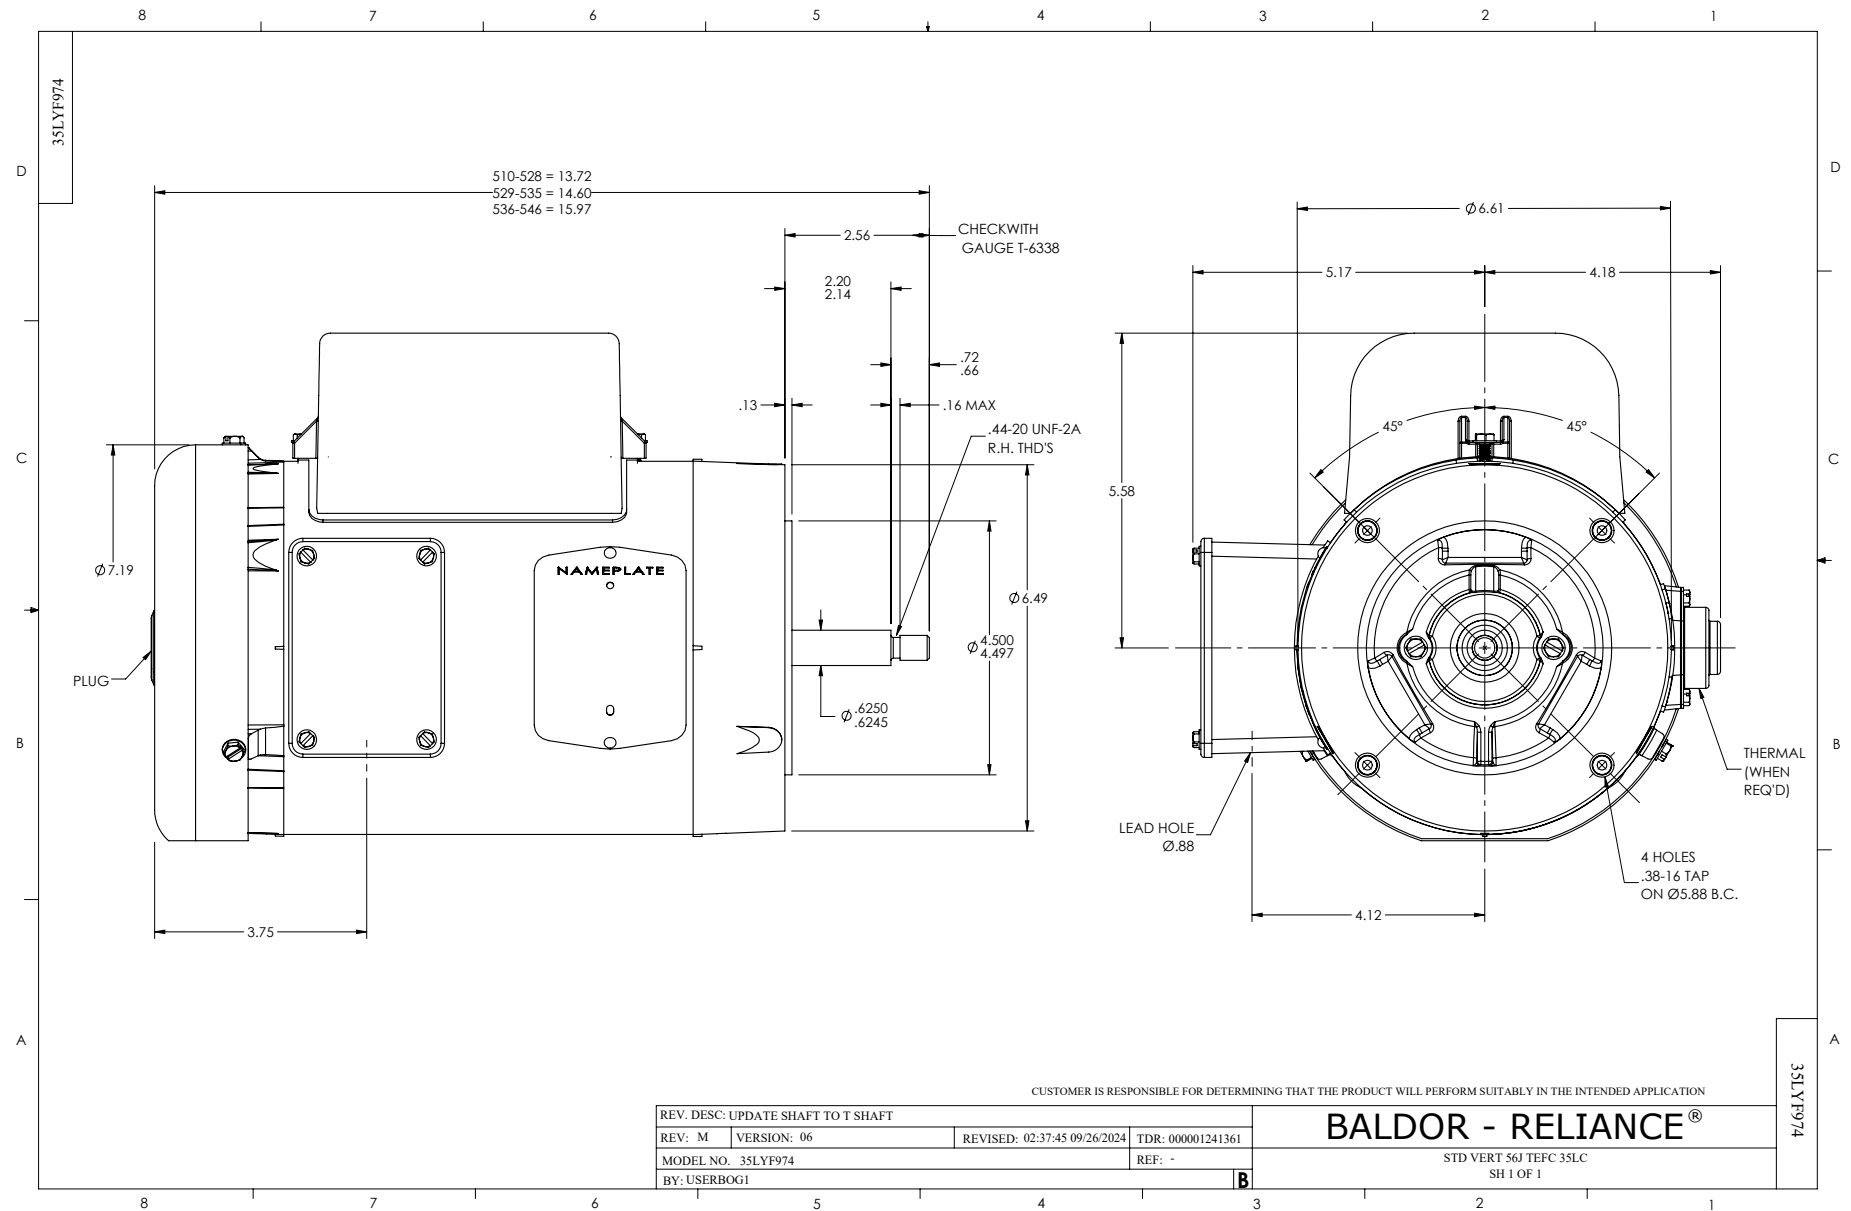

CD0098A02

