



Customer information packet

JM3458

.33HP, 1730RPM, 3PH, 60HZ, 56J, 3413M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56J
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 460.0 V 1.300 A @ 208.0 V 1.400 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	68.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a

Part detail

Revision	C
Type	AC
Mech. spec.	34K036
Base	
Status	PRD/A
Elec. spec.	34WGR709
Layout	34LYK036
Eff. date	10-28-2024
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	02-05-2021

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.84 IN
Power Factor	66
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Ext Thread
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1730 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	JM3458										
SPEC.	34K036R709										
HP	.33										
VOLTS	230/460										
AMP	1.4/.7										
RPM	1730										
FRAME	56J		HZ	60			PH	3			
SER.F.	1.35	CODE	L	DES	B		CLASS	B			
NEMA-NOM-EFF	68	PF	66								
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	TEFC	SN									
	SFA 1.6/.8										

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 85527

Preliminary Data Sheet

Winding: 34WGR709-R001			Type: 3413M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		.33		Full Load Torque		1 LB-FT
Volts		230/460		Start Configuration		direct on line
Full Load Amps		1.4/0.7		Breakdown Torque		3.5 LB-FT
R.P.M.		1725		Pull-up Torque		2.13 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		2.72 LB-FT
NEMA Design Code		B	KVA Code	Starting Current		3.93 A
Service Factor (S.F.)		1.35		No-load Current		0.6 A
NEMA Nom. Eff.		67	Power Factor	Line-line Res. @ 25°C		70.9 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		51°C
S.F. Amps		1.6/0.8		Temp. Rise @ S.F. Load		67°C
				Locked-rotor Power Factor		82
				Rotor inertia		0.031 lb-ft²

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	33	46	57	67	69	81	77
Efficiency	38.6	55.6	63.2	67.3	68.7	67.2	68.7
Speed	1779	1764	1749	1731	1712	1691	1697
Line amperes	0.6	0.62	0.65	0.7	0.76	0.85	0.81


ABB Motors and Mechanical Inc.

WINDING # 34WGR709


Typical performance - not guaranteed values.

0.33 HP 3 PH 60 HZ 1725 RPM 460 V 3413M

TORQUES (LB-FT): PO=3.5 PU=2.13 LR=2.72 LRA=3.93

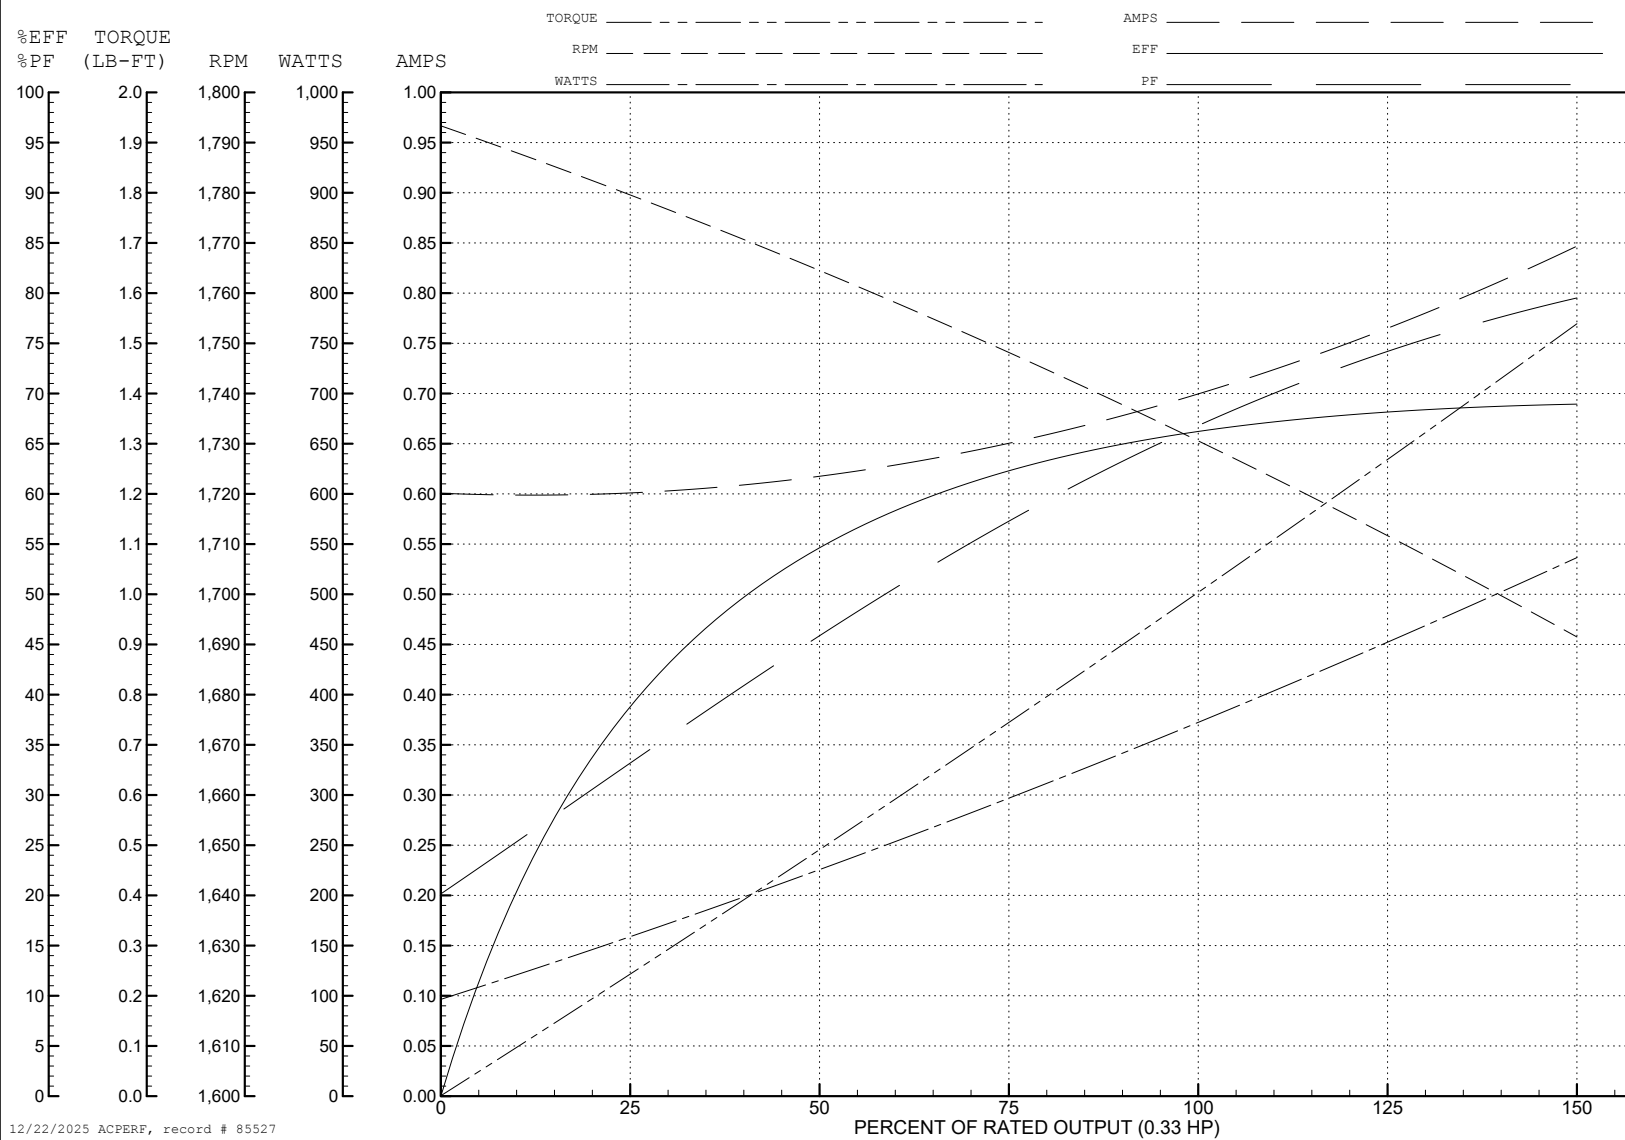

34LYK036

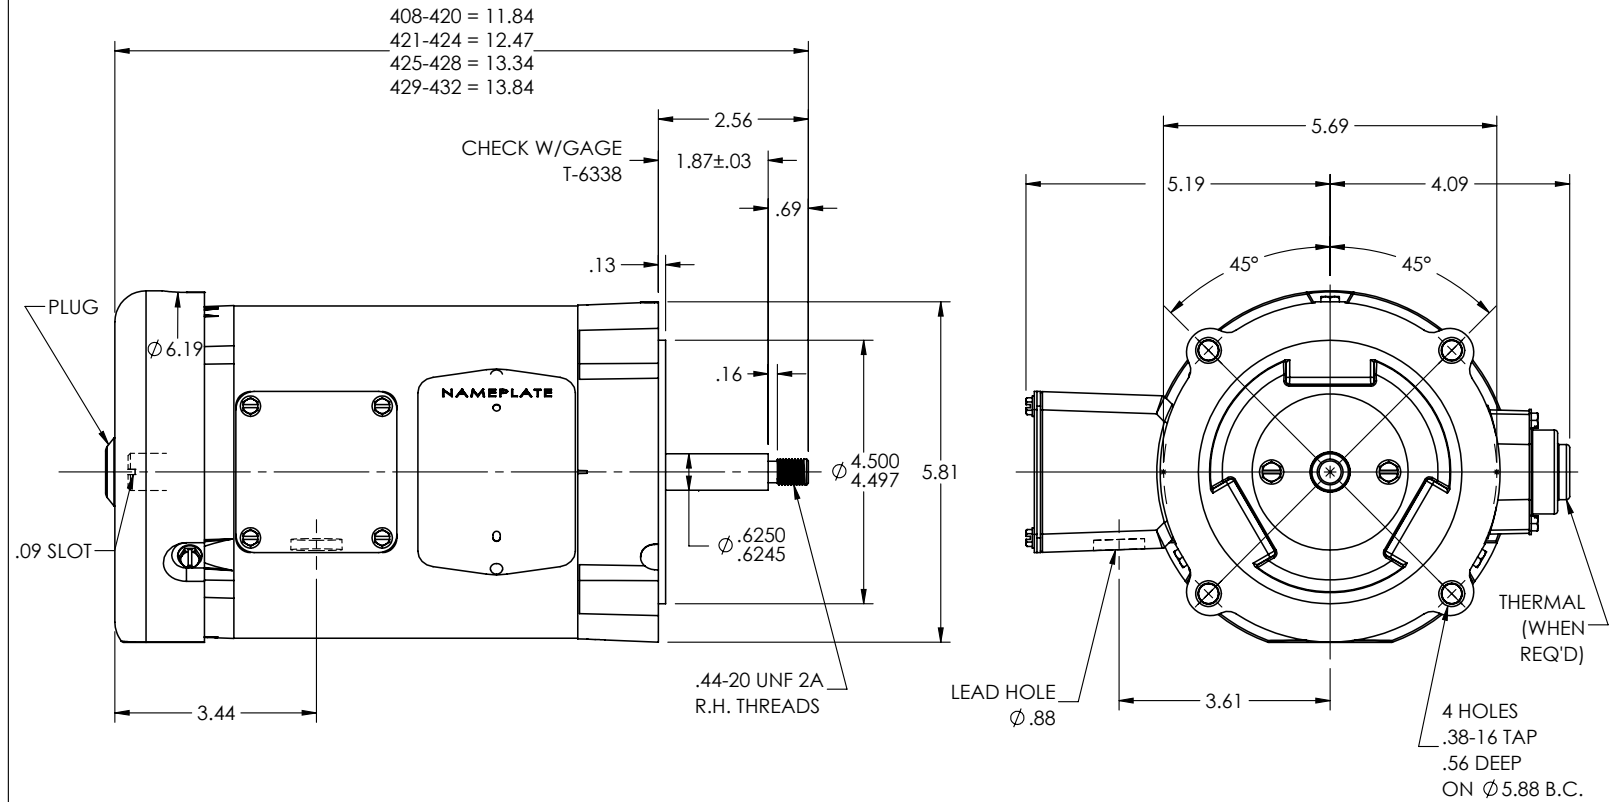

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: LOAD TO SOLIDWORKS - REV G

REV: H

VERSION: 03

REVISED: 04:25:22 12/19/2022

TDR: 000001201165

BALDOR - RELIANCE®

34LYK036

MODEL NO. 34LYK036

REF: -

BY: ENFRAJ0

STD VERT MODEL 34M NEMA 56J TEFC

34LYK036

