



Customer information packet

JMEWDM4109T

40HP, 3550RPM, 3PH, 60HZ, 324JM, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	324JM
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	94.000 A @ 230.0 V 47.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	47.0 a

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGY202
Layout	12LYL057
Eff. date	02-21-2024
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	01-20-2020

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1256M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	30.53 IN
Power Factor	85
Product Family	Washdown Features
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3550 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L											
CAT.NO.	JMEWDM4109T										
SPEC.	12-0000-1430										
HP	40										
VOLTS	230/460										
AMP	94/47										
RPM	3550										
FRAME	324JM		HZ	60				PH	3		
SER.F.	1.15		CODE	H	DES	B		CLASS	F		
NEMA-NOM-EFF	92.4		PF	85							
RATING	40C AMB-CONT										
CC	010A										
DE	6312		ODE	6311							
ENCL	TEFC		SN								
BLANK	10:1 CT & VT,1.0SF										

AC Induction Motor Performance Data

Record # 29691

Typical performance - not guaranteed values

Winding: 12WGY202-R001				Type: 1256M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		40		Full Load Torque		58.9 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		94/47		Breakdown Torque		241 LB-FT	
R.P.M.		3550		Pull-up Torque		61.2 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		93.8 LB-FT	
NEMA Design Code		A	KVA Code	H	Starting Current		323 A
Service Factor (S.F.)		1.15		No-load Current		19.3 A	
NEMA Nom. Eff.		93	Power Factor	85	Line-line Res. @ 25°C		0.13 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		58°C	
S.F. Amps				Temp. Rise @ S.F. Load		72°C	
				Locked-rotor Power Factor		21.7	
				Rotor inertia		4.36 lb-ft²	

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	71	81	85	87	88	86
Efficiency	87.3	91.4	92.9	93.1	93.1	92.7	93.1
Speed	3588	3578	3567	3555	3543	3530	3548
Line amperes	22	28.7	37.4	47	57.4	68.4	53.2


ABB Motors and Mechanical Inc.


WINDING # 12WGY202

Typical performance - not guaranteed values.

40 HP 3 PH 60 HZ 3550 RPM 460 V 1256M

TORQUES (LB-FT): PO=241 PU=61.2 LR=93.8 LRA=323

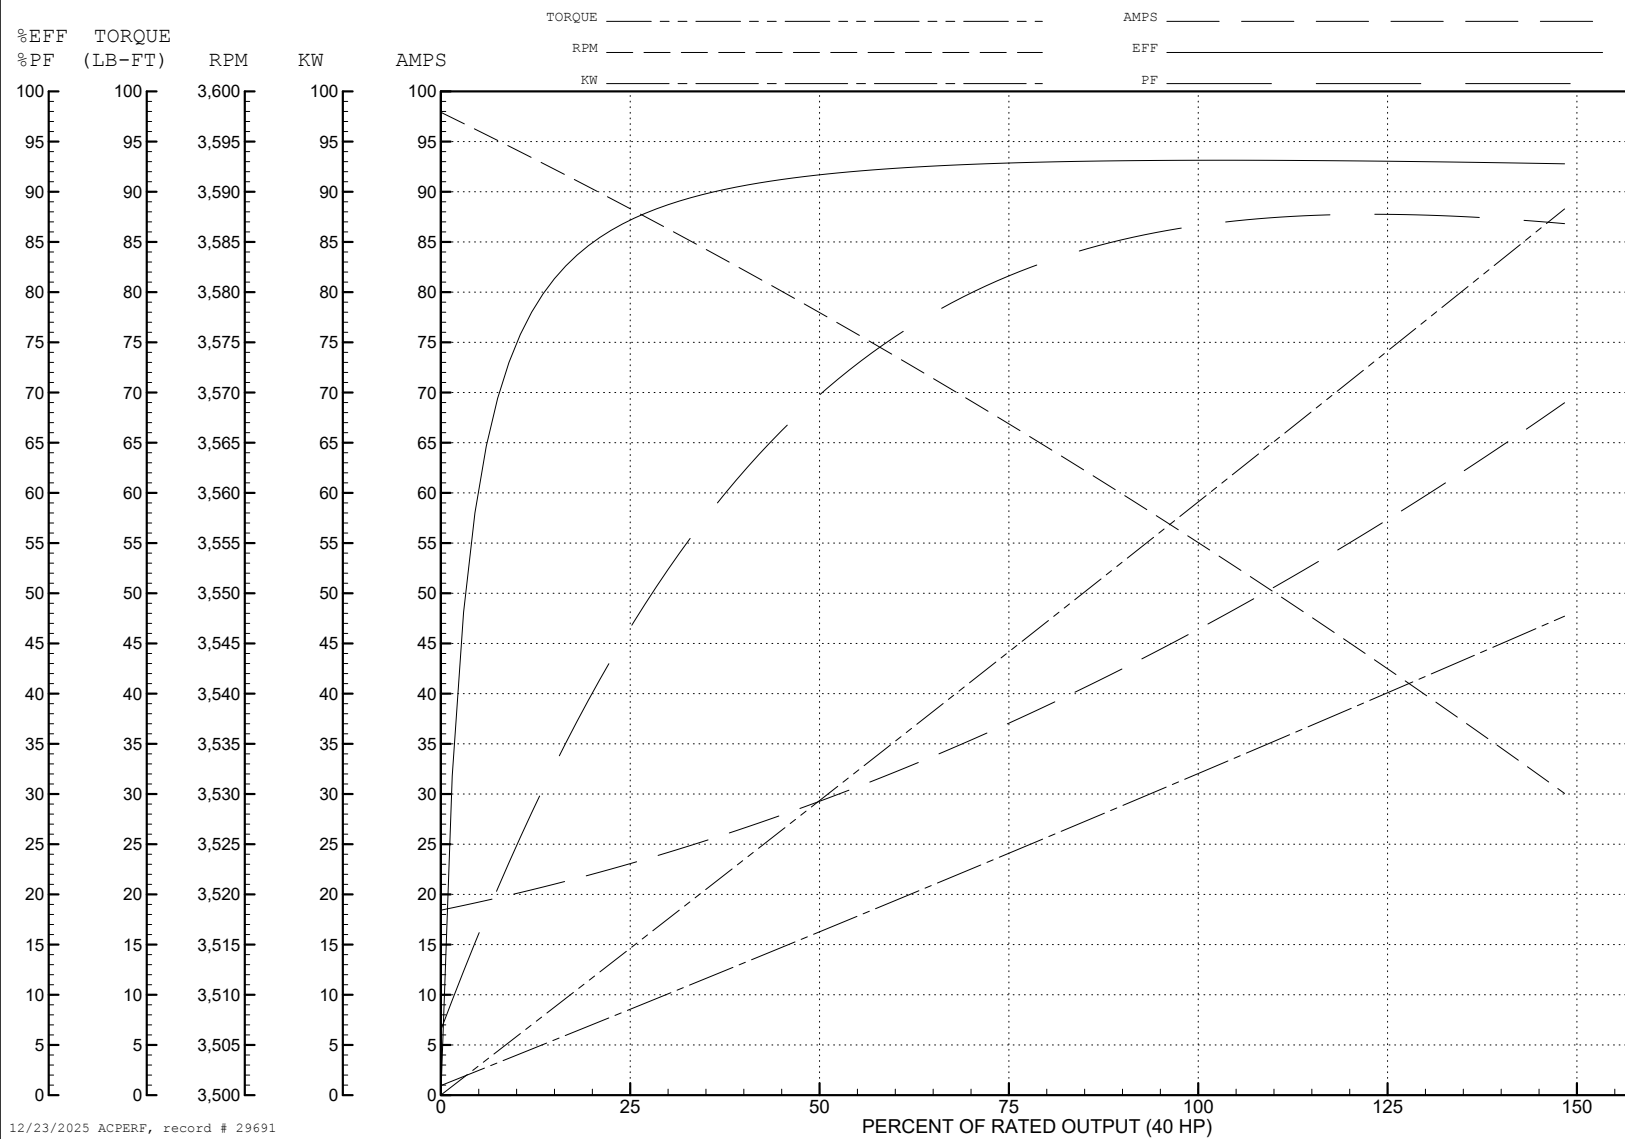

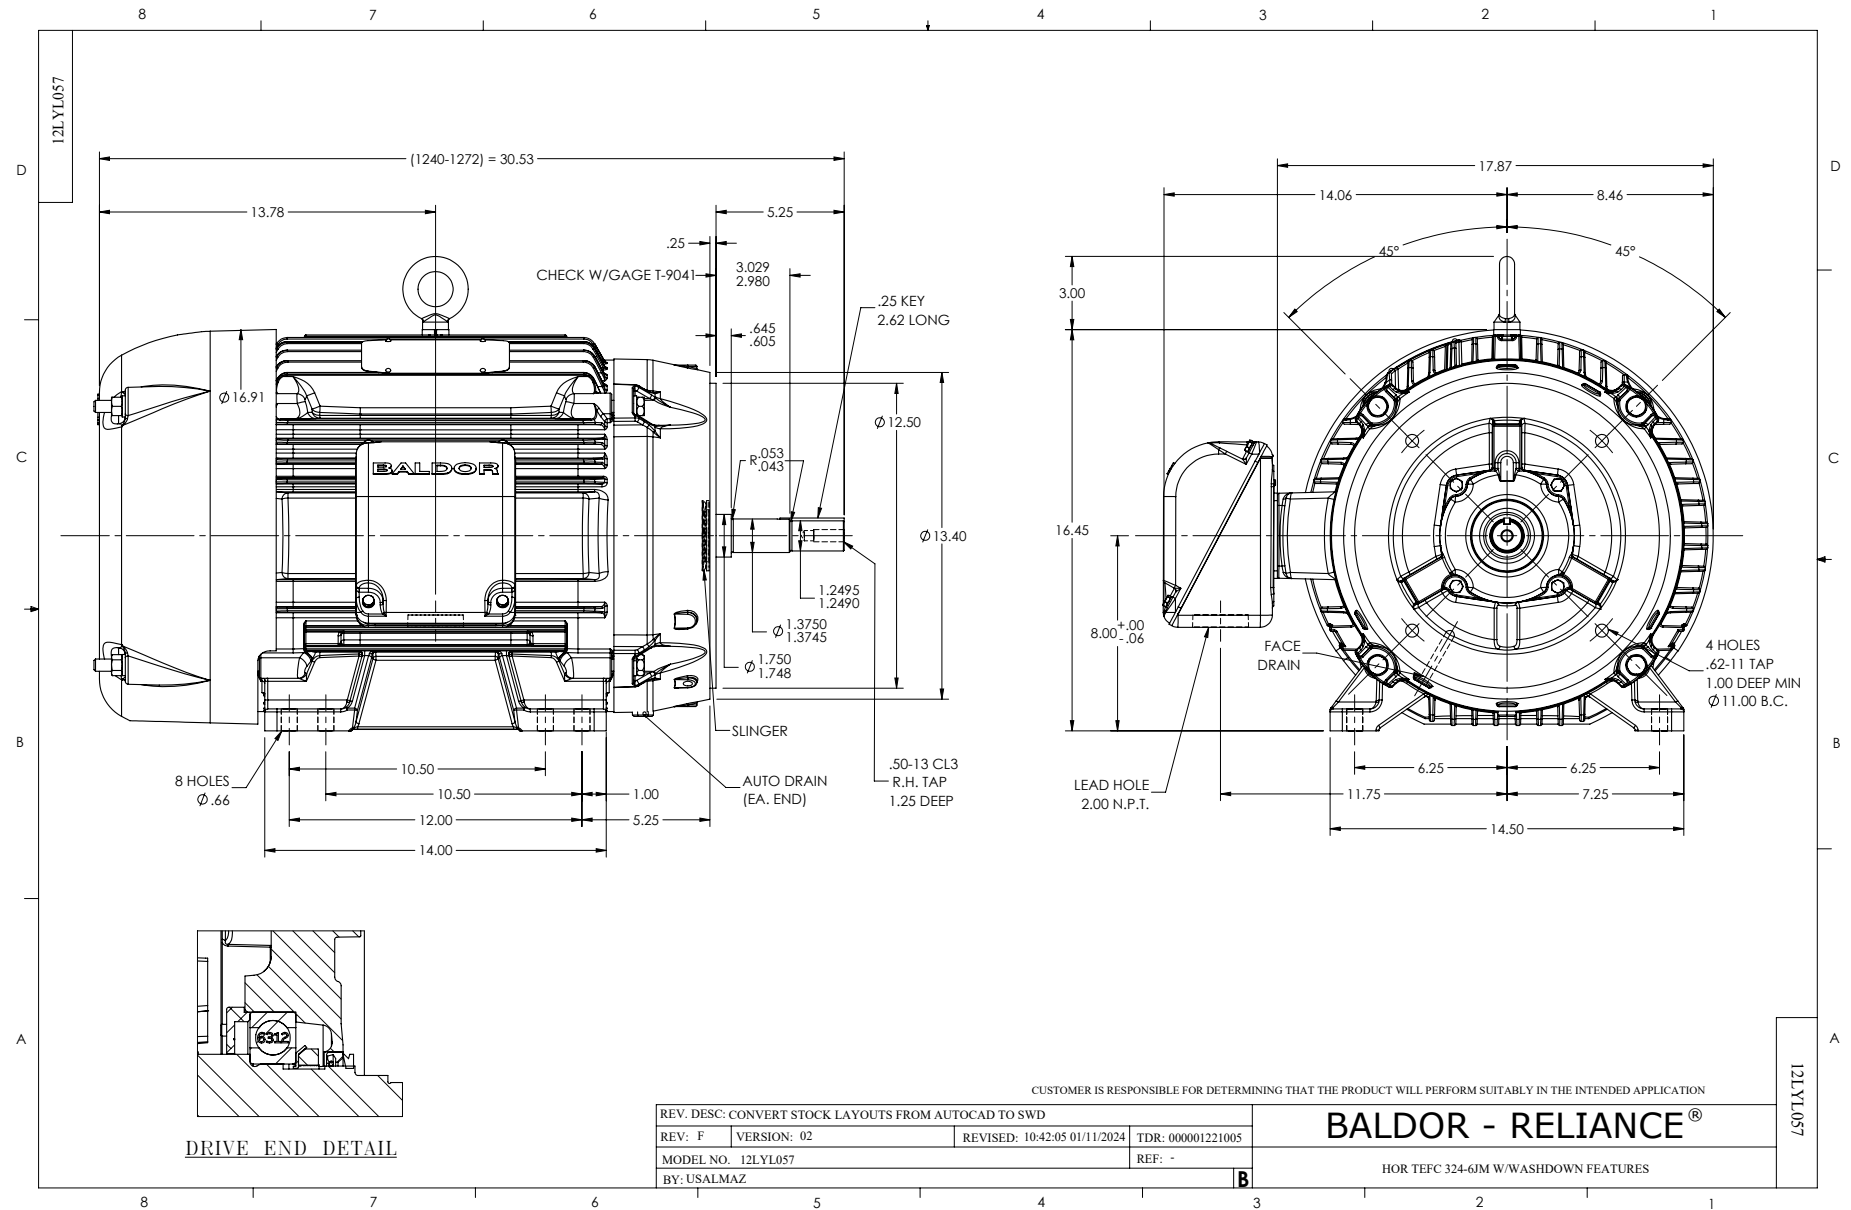

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1