



Customer information packet

L1205-50

.33/KW .25, 2900RPM, 1PH, 50HZ, 48, 3416LC, OP

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	48
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.330 HP @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	3000 RPM @ 50 HZ
Voltage @ Frequency	110.0 V @ 50 HZ 220.0 V @ 50 HZ
Agency Approvals	UR CE CSA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
Insulation Class	B
Inverter Code	Not Inverter
Lifting Lugs	No Lifting Lugs

Part detail

Revision	J
Type	AC
Mech. spec.	34F351
Base	
Status	PRD/A
Elec. spec.	34WGR744
Layout	34LYF351
Eff. date	12-31-2024
CD Diagram	CD0055
Poles	02
Leads	6#18
Proprietary	False
Created date	02-10-2023

Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	9.76 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.500 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	2850 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1372L									
CAT.NO.	L1205-50								
SPEC.	34F351R744								
HP	.33/KW .25								
VOLTS	110/220								
AMP	3.4/1.7								
R.P.M. (1/MIN)	2900								
FRAME	48		HZ	50			PH	1	
SER.F.	1.35	CODE	L	DES	-	CL	B		
NEMA-NOM-EFF	71	PF	92						
RATING	40C AMB-S1 CONT								
CC			IP23 11KG IC01						
DE	6203		ODE	6203					
ENCL	OPEN	SN							
	IE2-50HZ 66 (75%),58 (50%)								

AC Induction Motor Performance Data

Record # 101548

Typical performance - not guaranteed values

Winding: 34WGR744-R001			Type: 3416LC		Enclosure: OPEN		
Nameplate Data			220 V, 50 Hz: High Voltage Connection				
Rated Output (KW)		.25	Full Load Torque		0.6018 LB-FT		
Volts		110/220	Start Configuration		direct on line		
Full Load Amps		3.4/1.7	Breakdown Torque		2 LB-FT		
R.P.M.		2900	Pull-up Torque		1.77 LB-FT		
Hz	50	Phase	1	Locked-rotor Torque		2.34 LB-FT	
NEMA Design Code		-	KVA Code	L	Starting Current		14.2 A
Service Factor (S.F.)		1.35		No-load Current		0.803 A	
NEMA Nom. Eff.		71	Power Factor	92	Line-line Res. @ 25°C		6.2658 Ω A Ph 4.6856 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		16°C	
S.F. Amps		4.4/2.2		Temp. Rise @ S.F. Load		19°C	

Load Characteristics 220 V, 50 Hz, 0.25 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	72	83	88	92	94	95	94
Efficiency	41.5	58.8	67.2	72.1	74.3	74.7	74.5
Speed	2967.1	2947.3	2927.1	2902	2876.4	2846.5	2864
Line amperes	0.955	1.17	1.4	1.7	2.01	2.37	2.15


ABB Motors and Mechanical Inc.

WINDING # 34WGR744

Typical performance - not guaranteed values.

0.25 KW 1 PH 50 HZ 2900 RPM 220 V 3416LC

TORQUES (LB-FT) : PO=2 PU=1.77 LR=2.34 LRA=14.2

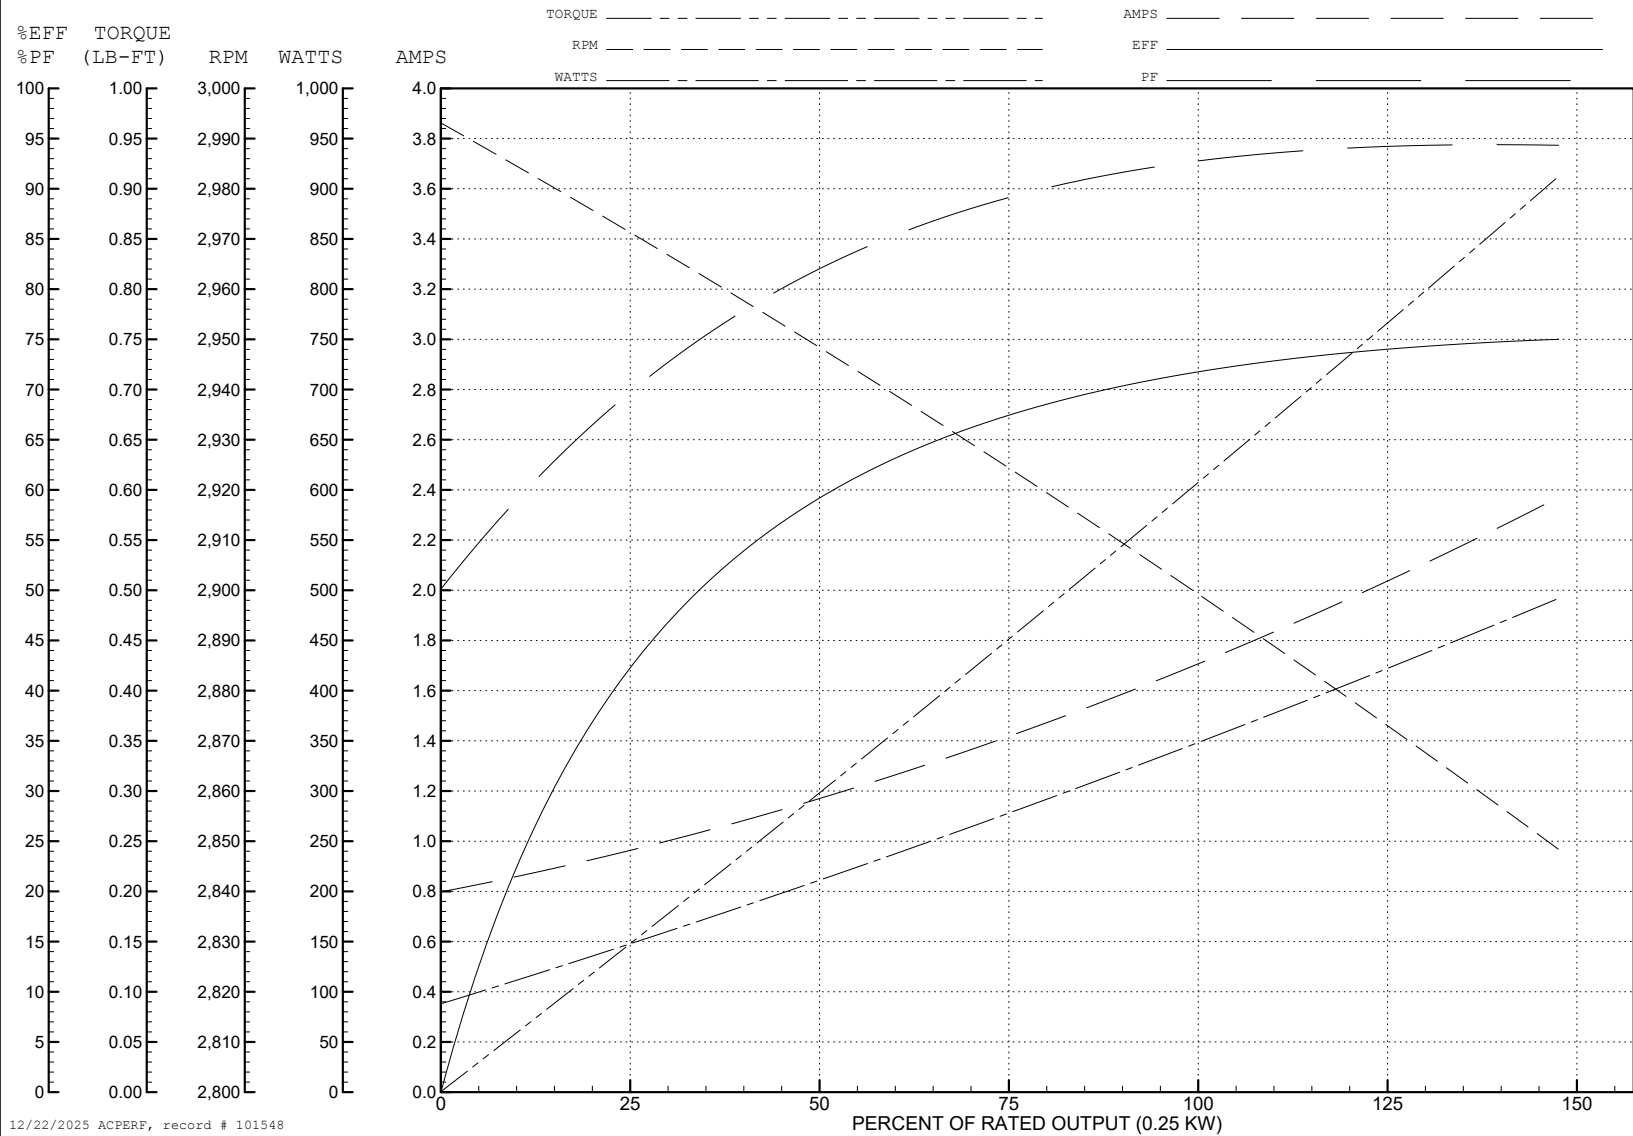

12/22/2025 ACPERF, record # 101548

