



Customer information packet

VM3534-5

.33HP, 1725RPM, 3PH, 60HZ, 56C, 3413M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.640 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	68.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.6 a
Insulation Class	B
Inverter Code	Not Inverter

Part detail

Revision	AD
Type	AC
Mech. spec.	34A063
Base	
Status	PRD/A
Elec. spec.	34WG0901
Layout	34LYA063
Eff. date	02-10-2025
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	01-01-0001

KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	57
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	VM3534-5										
SPEC.	34A63-901										
HP	.33										
VOLTS	575										
AMP	.64										
RPM	1725										
FRAME	56C		HZ	60			PH	3			
SER.F.	1.35	CODE	L	DES	B		CLASS	B			
NEMA-NOM-EFF	68	PF	57								
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	TEFC	SN									
	SFA .7										

AC Induction Motor Performance Data

Record # 94834

Typical performance - not guaranteed values

Winding: 34WG0901-R019				Type: 3413M		Enclosure: XPFC		
Nameplate Data				575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		.33		Full Load Torque		0.9904 LB-FT		
Volts		575		Start Configuration		direct on line		
Full Load Amps		.64		Breakdown Torque		4.9 LB-FT		
R.P.M.		1745		Pull-up Torque		3.35 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		3.5 LB-FT		
NEMA Design Code		B		KVA Code	M		Starting Current	3.6 A
Service Factor (S.F.)		1.15		No-load Current		0.5921 A		
NEMA Nom. Eff.		67		Power Factor	57		Line-line Res. @ 25°C	78 Ω
Rating - Duty				Temp. Rise @ Rated Load		47°C		
S.F. Amps				Temp. Rise @ S.F. Load		50°C		
				Locked-rotor Power Factor		69.8		
				Rotor inertia		0.031 lb-ft²		

Load Characteristics 575 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	25.8953	35.9552	45.283	53.4828	57.8665	60.5621	56
Efficiency	40.0473	56.1344	64.3514	68.8858	70.6093	71.4645	69.9
Speed	1785.321	1774.521	1763.091	1751.121	1743.561	1738.34	1747
Line amperes	0.5981	0.6132	0.6377	0.6712	0.6958	0.714	0.686


ABB Motors and Mechanical Inc.

WINDING # 34WG0901



Typical performance - not guaranteed values.

0.33 HP 3 PH 60 HZ 1745 RPM 575 V 3413M

TORQUES (LB-FT): PO=4.9 PU=3.35 LR=3.5 LRA=3.6

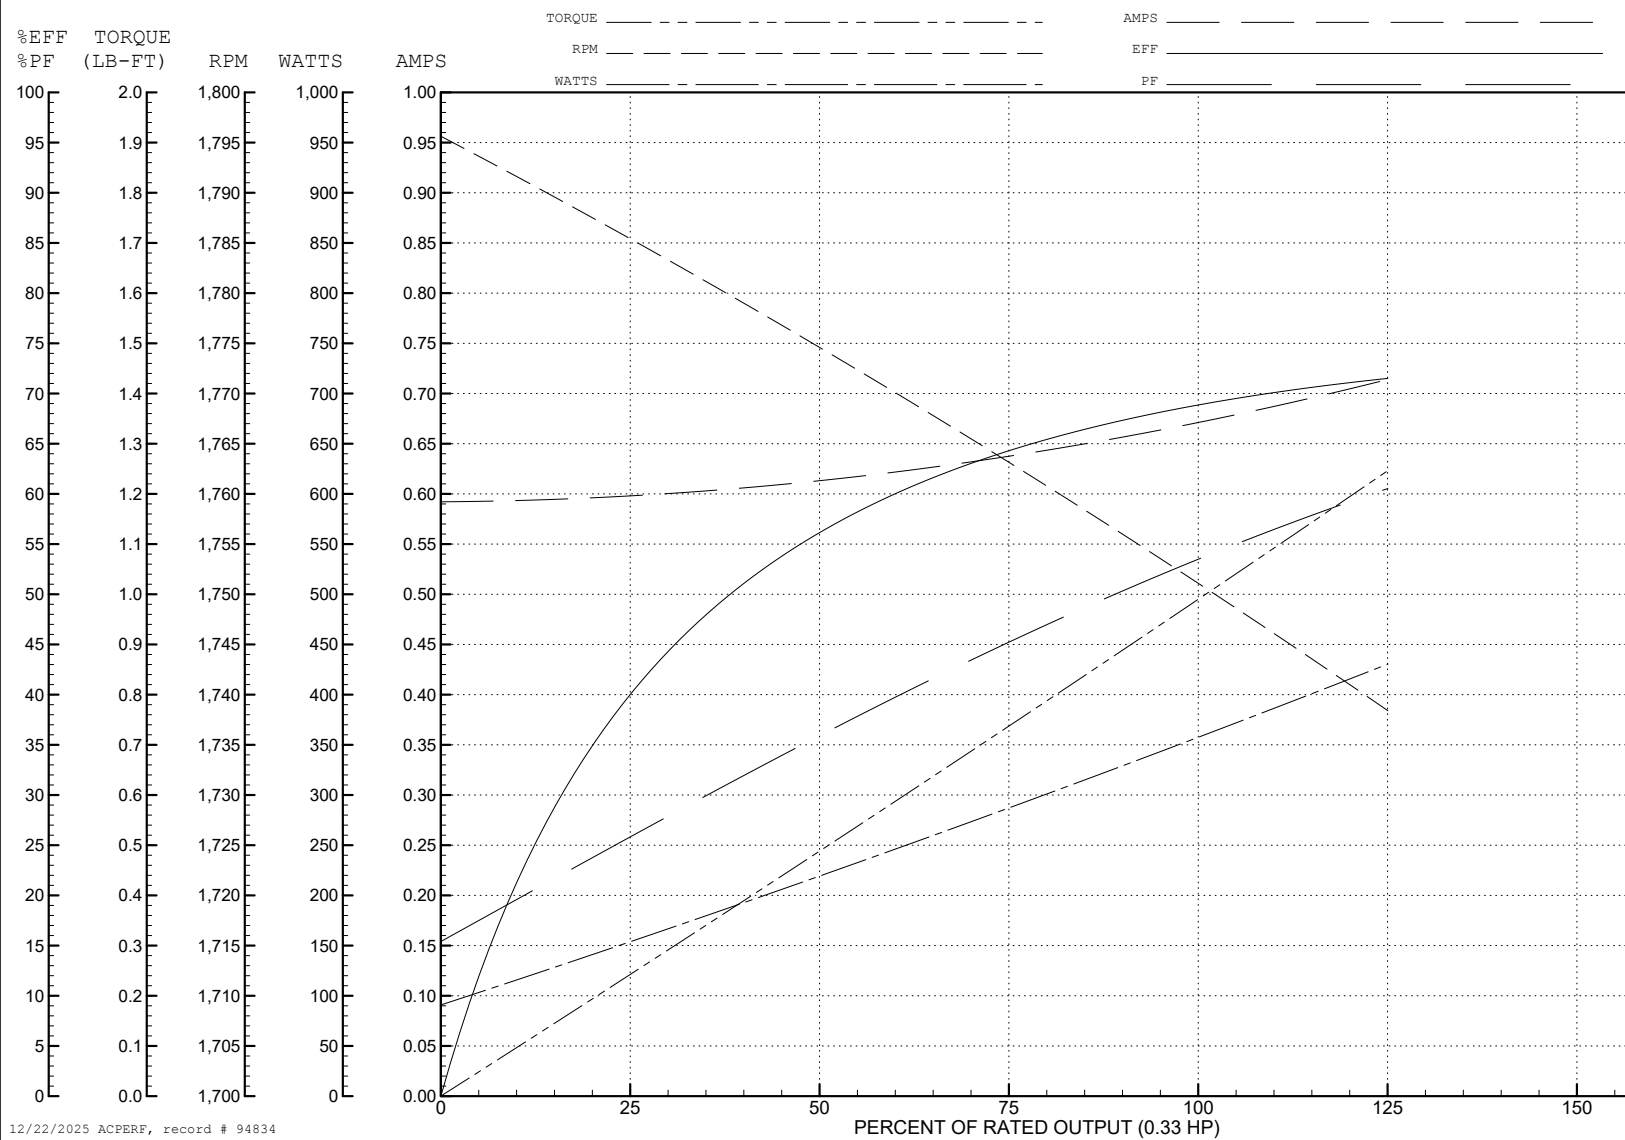

34LYA063

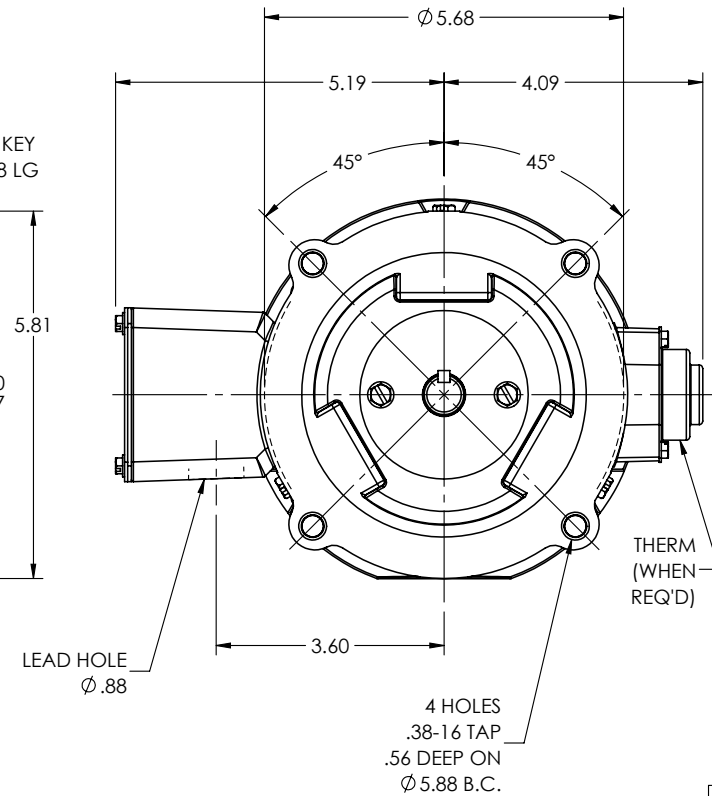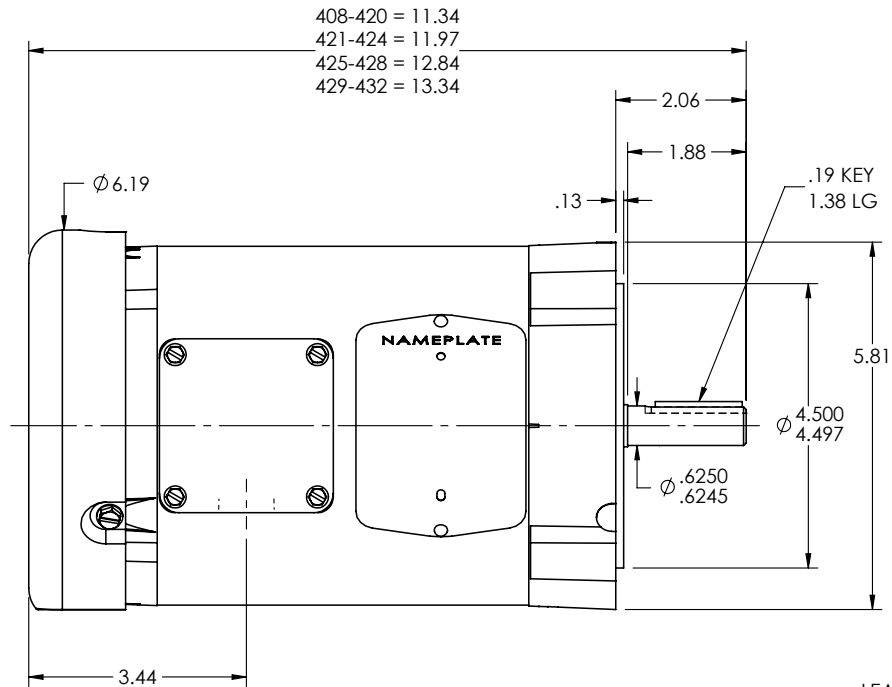

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: P

VERSION: 05

REVISED: 08:51:08 10/31/2024

TDR: 000001243684

34LYA063

MODEL NO. 34LYA063

REF: -

BY: ENJEFD0

BALDOR - RELIANCE®

STD VERT 34M NEMA 56C TEFC

34LYA063

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

J-BRN

OPTIONAL THERMOSTATS

J-BRN

3-ORG

2-WHT

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

J-BRN

2-WHT

OPTIONAL THERMOSTATS

J-BRN

3-ORG

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD0006

34WG0884: Electrical Design

Page 8 of 8