



Customer information packet

ZDPM18010C-BV

10HP, 1800RPM, 3PH, 60HZ, 1831C, TEBC, FOOT,

Specifications

Enclosure	TEAO
Frame	FL1831C
Frame Material	Aluminum
Frequency	60.00 Hz
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	No Grease
Current @ Voltage	10.600 A @ 460.0 V
Duty Rating	CONT
Feedback Device	TACHOMETER
Frame Prefix	FL
Heater Indicator	No Heater
High Voltage Full Load Amps	10.6 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	22.08 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1800 rpm
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Part detail

Revision	F
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	PM3923A
Layout	617227-326
Eff. date	12-21-2021
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	04-09-2015

Nameplate

000613006MY									
	DUTY	HP	RPM	AMPS	VOLTS	HZ			
	CONT	10	1800		10.6	460		60	
	CONT	10	3000		10.3	460		100	
	CONT	10	1800		21.2	230		60	
	CONT	10	3000		20.6	230		100	
CAT.NO.	ZDPM18010C-BV			SPEC. NO.	P18M0501				
SER.NO				FR	FL 1831C	INSUL	H		
PH.	3	MAX SAFE SPEED			7200	AMB.	40	MIN. AMB.	-25
DESIGN NO.	PM3923A			TYPE		ENCL.	TEAO-BC		
S.F.	1.0			D.E. BRG.	45BC02JPP30A				
ENCL MOD				O.D.E. BRG.	35BC02JPP30A				

000692000VY

MEAS OPEN CIRCUIT VOLTAGE


IS VOLTS AT RPM.

S.O. 0	VOLTS 460	TYPE IPM	STATOR RES. @ 25 °C 1.303
FRAME F11831	AMPS 10.3	ENCLOSURE TEBC	OHMS (BETWEEN LINES)
HP 10	DUTY CONT	MAX SAFE RPM 7200	
BASE SPEED 1800	S.F. 1.0	WK ² (lb-Ft ²) .46	
PHASE/HERTZ 3/60	AMB °C/INSUL 40/H	MAX INSTANTANEOUS OVERLOAD AMPS 30.9	

VARIABLE SPEED PERFORMANCE

HP	AMPS (rms)	RPM	GAMMA*	POWER FACT.	EFF.	VOLTS (L-L) (rms)	Em (L-N) (rms)	Lq (mH)	Ld (mH)
OpenCkt**	N/A	1800	5.0	N/A	N/A	N/A	196	N/A	N/A
OpenCkt, hot	N/A	1800	5.0	N/A	N/A	N/A	179	N/A	N/A
2.03	2.6	1800	28.5	98.1	90.5	382	179	164	23.8
4.57	5.2	1800	39.0	97.9	92.8	420	179	123	23.3
7.20	7.7	1800	44.2	97.4	93.8	439	179	100	22.7
10.0	10.3	1800	49.5	97.1	94.0	458	179	91.1	22.1

Remarks: TYPICAL DATA
CONSTANT TORQUE 0-1800 RPM, CONSTANT POWER 1800-3000 RPM
200% OVERLOAD BELOW BASE SPEED TAPERED TO 100% AT 3000 RPM

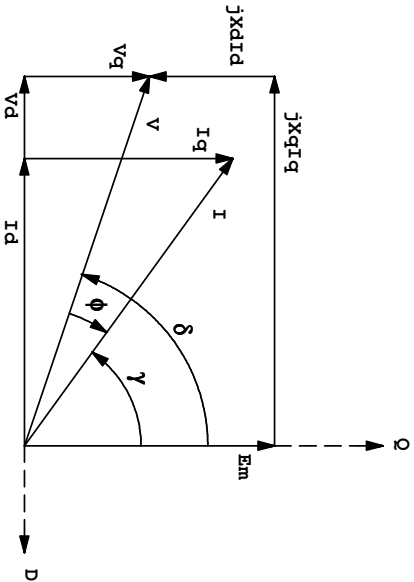

*Gamma is the current angle relative to counter emf, defined to be positive when current leads counter emf.
Equivalently, Gamma is positive when Id is negative.
**Data at 25°C - all other data at rated temperature

BALDOR	DR. BY	CD	IPM MOTOR			
	CK. BY	RM		PERFORMANCE		
	APP. BY	RM			DATA	
	DATE	11/23/09				PM3923A

S.O. 0	VOLTS 460	TYPE IPM	STATOR RES. @ 25 °C 1.303
FRAME FTL831	AMPS 10.3	ENCLOSURE TEBC	OHMS (BETWEEN LINES)
HP 10	DUTY CONT	MAX SAFE RPM 7200	
BASE SPEED 1800	S.F. 1.0	WK ² (lb-Ft ²) .46	
PHASE/HERTZ 3/60	AMB °C/INSUL 40/H	MAX INSTANTANEOUS OVERLOAD AMPS 30.9	


CUSTOM MOTOR BLOCK PARAMETERS

Parameter Name	Value	Units	Description
Motor Rated HP	10.0	HP	Horsepower rating of the motor
Motor Rated Volt	460.0	V	Motor rated volts at full speed and load
Motor Rated Spd	1800.	RPM	Motor rated speed at full load
Motor Rated Freq	60.00	Hz	Motor rated speed frequency
Motor Rated Amps	10.3	A	Motor rated amps at full load and speed
Motor Peak Amps	30.9	A	Maximum current level that can be applied to motor
Stator R	.651	Ohms	Line-to-Neutral stator resistance
Voltage Constant	172.1	V/KRPM	RMS line-to-line EMF at 1000 RPM
Stator Id	22.100	mH	D-axis stator inductance
Stator Lq	91.100	mH	Q-axis stator inductance
Lq @ 2.0 Hp	164.100	mH	Q-axis inductance at lowest partial load
Lq @ 4.6 Hp	122.600	mH	Q-axis inductance at mid partial load
Lq @ 7.2 Hp	100.100	mH	Q-axis inductance at highest partial load
Iq @ 2.0 Hp	2.3	A	Optimum Q-axis current at lowest partial load
Iq @ 4.6 Hp	4.0	A	Optimum Q-axis current at mid partial load
Iq @ 7.2 Hp	5.5	A	Optimum Q-axis current at highest partial load
Iq @ 10.0 Hp	6.7	A	Optimum Q-axis current at rated load

	DR. BY _____	CD _____	IPM MOTOR PARAMETERS DATA
	CK. BY _____	RM _____	
	APP. BY _____	RM _____	
	DATE 11/23/09		
			PM3923A
			ISSUE DATE 11/23/09


S.O. 0	VOLTS 460	TYPE IPM	STATOR RES. @ 25 °C 1.303
FRAME F1L831	AMPS 10.3	ENCLOSURE TEBC	OHMS (BETWEEN LINES)
HP 10	DUTY CONT	MAX SAFE RPM 7200	
BASE SPEED 1800	S.F. 1.0	WK2 (lb-ft ²) .46	
PHASE/HERTZ 3/60	AMB °C/INSUL 40/H	MAX INSTANTANEOUS OVERLOAD AMPS 30.9	

Lq, Ld, & Torque vs. RMS Phase Amps

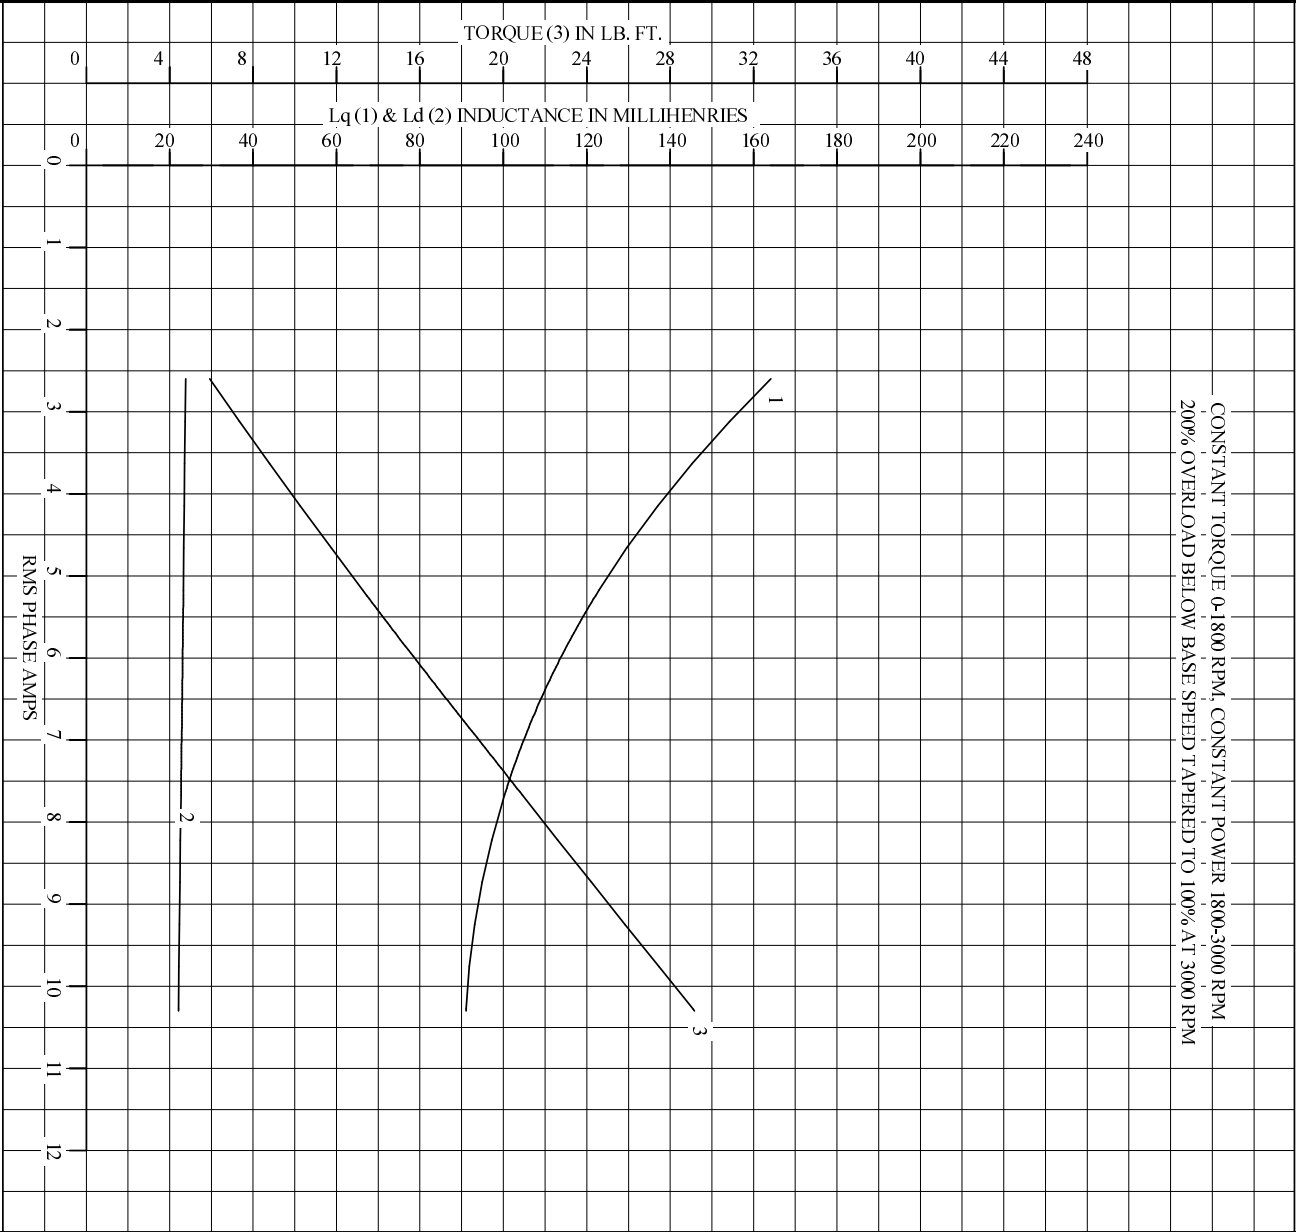

BALDOR		DR. BY _____ CD _____		IPM MOTOR	
CK. BY _____		RM _____		PERFORMANCE	
APP. BY _____		RM _____		DATA	
DATE 11/23/09				ISSUE DATE 11/23/09	

617227-326

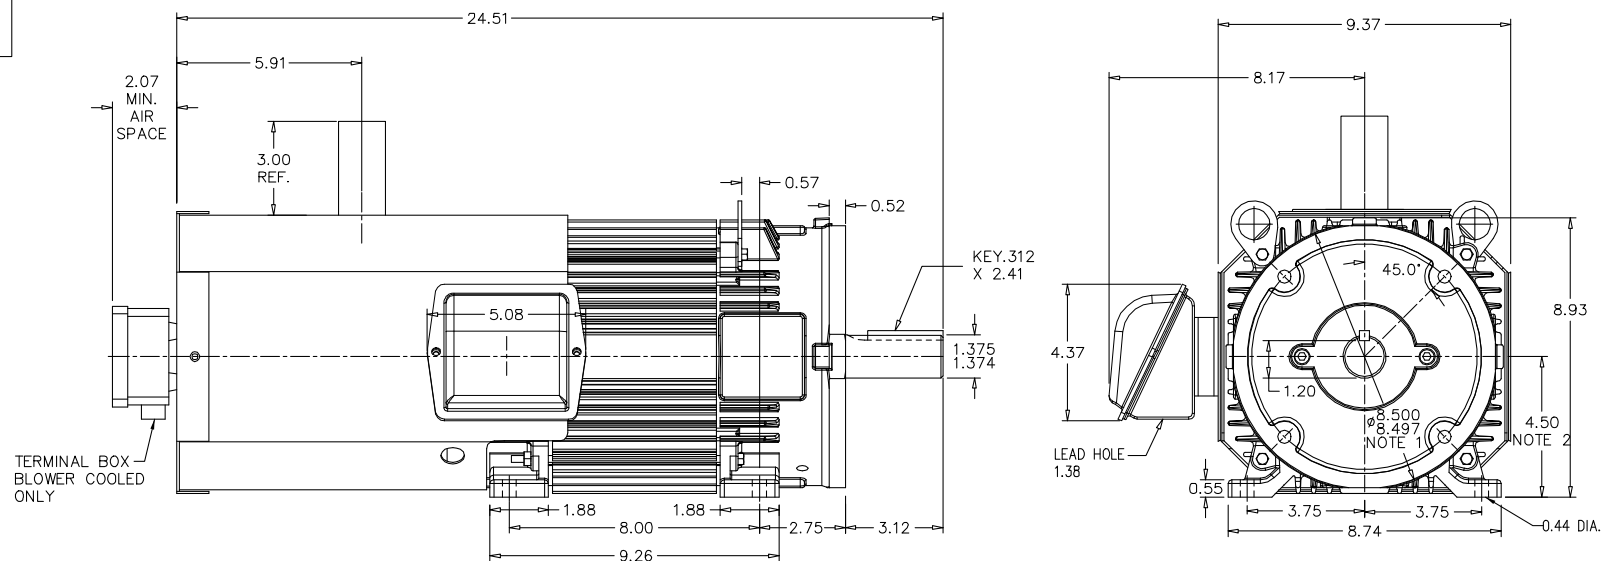RPM-AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR
FL1831CZENCLOSURE: TOTALLY ENCLOSED
MOUNTING: FOOT/NEMA 210TC C-FACE
DRIVE METHOD: COUPLED OR BELTEDCOOLING: BLOWER COOLED
ACCESSORIES: ENCODERNOTE 1: C-FACE & TACHOMETER MOUNTING
1/2-13 TAP, 1.00 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY 0.004 MAX. T.I.R.NOTE 2: SHAFT HEIGHT WILL NOT BE EXCEEDED
SHIMS UP TO 0.03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GREARED MACHINESTERMINAL BOX (40 AMPS)
(706320-003A)
ROTATABLE IN 90° INCREMENTSMOTOR WEIGHT: 133 LBS. (MAY VARY 15%)
DIMENSIONS ARE IN INCHES SCALE: 1.00

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THIS PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: INITIAL RELEASE	VERSION: 00	TDR: 000001063820
REV. LTR: -	REVISED: 03:05:29 03/09/2018	BY: RGGWT
FILE: \RGG\00028\992		
MTL: -		

BALDOR


DIM SHT,RPMAC,TEBC,FL1831CZ,ENCODER

SH 1 of 1

617227-326

INDUSTRIAL ALTERNATING CURRENT MOTORS
RPM AC

STEEL, CAST IRON, MILL AND TERMINAL BOARD CONDUIT BOX DIMENSIONS
NEMA FRAMES RL210 thru RL280 and IEC FRAMES RDL132 thru RDL180
NEMA FRAMES FL180 thru FL280 and IEC FRAMES FDL112 thru FDL180

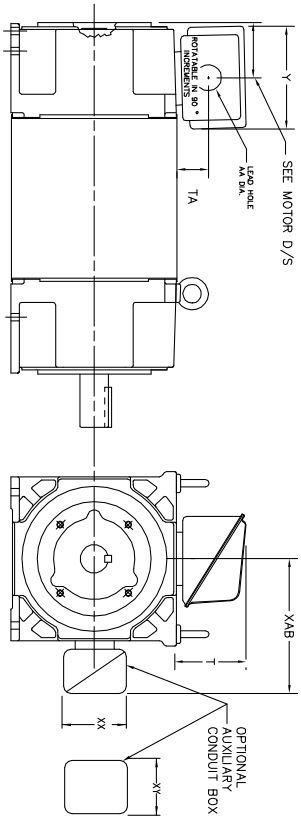

FRAME	TYPE	TERMINAL STRIP	AMPS	C/BOX	Y	TA	T	AA
FL180	STEEL	N	40	706320003A	5.00	1.62	3.00	1.12
FL180	STEEL	Y/N	75	706320003A	6.12	2.35	4.38	1.75/2.00
FL180	STEEL	N	208	706320007A	6.62	2.00	7.00	2.50/2.00
FL180	CAST IRON	Y/N	100	706320004B	6.75	2.50	4.38	1.0/1.75
FL180 & FDL11	MILL	Y	100	706310056A	7.75	2.30	4.40	PG29/PG16

FL210 & RL210	STEEL	N	61	075452000B	6.34	2.00	4.12	1.75
FL210 & RL210	STEEL	N	121	075454001A	7.69	2.38	5.25	1.94
FL210 & RL210	STEEL	N	306	706320016A	9.00	4.12	8.44	4.59
FL210 & RL210	CAST IRON	N	110	075460062B	7.25	2.50	5.25	1.5 TAP
FL210 & RL210	MILL	Y	100	706310229A	7.75	2.30	4.40	PG29/PG16
FL210 & RL210	MILL	Y	160	706310056A	9.00	3.06	5.40	PG36/PG16
FL210 & RL210	MILL	Y/N	235	706310056B	11.42	4.00	6.72	2.50

FL250 & RL250	STEEL	N	61	075452000B	6.34	2.00	4.12	1.75
FL250 & RL250	STEEL	N	121	075454001A	7.69	2.38	5.25	1.94
FL250 & RL250	STEEL	N	306	706320016A	9.00	4.12	8.44	4.59
FL250 & RL250	CAST IRON	N	110	075460062B	7.25	2.50	5.25	1.5 TAP
FL250 & RL250	CAST IRON	N	210	706320013A	10.50	4.88	9.00	4.0 TAP
FL250 & RL250	MILL	Y	100	706310229A	7.75	2.30	4.40	PG29/PG16
FL250 & RL250	MILL	Y	160	706310056B	9.00	3.06	5.40	PG36/PG16
FL250 & RL250	MILL	Y/N	235	706310057A	11.42	4.00	6.72	2.50
FL250 & RL250	MILL	Y	235	706310063B	14.39	7.43	12.15	BLANK

FL280 & RL280	STEEL	N	160	706320029A	7.25	3.50	7.06	2.50
FL280 & RL280	STEEL	N	306	706320016A	9.00	4.12	8.44	4.59
FL280 & RL280	STEEL	N	500	702658001C	14.62	7.56	12.70	5.00
FL280 & RL280	CAST IRON	N	140	706320012B	9.25	4.81	8.56	3.0 TAP
FL280 & RL280	CAST IRON	N	210	706320013A	10.50	4.88	9.00	4.0 TAP
FL280 & RL280	CAST IRON	N	510	706320014D	15.00	7.56	12.81	5.0 TAP
FL280 & RL280	MILL	Y	100	706310056A	7.75	2.30	4.40	PG29/PG16
FL280 & RL280	MILL	Y	160	706310056B	9.00	3.06	5.40	PG36/PG16
FL280 & RL280	MILL	Y/N	235	706310637A	11.42	4.00	6.72	2.50
FL280 & RL280	MILL	Y	400	706310063B	14.39	7.43	12.15	BLANK

FRAME SIZE	XAB	XX	XY	PART NUMBER	FRAME SIZE	XAB	XX	XY	PART NUMBER
FL210/RL210/FL112	7.38	4.25	4.25	602007-26-A	FL210/RL210/FL112	10.88	8.00	8.00	706310-3-B
FL250/RL250/FL160	8.44	4.25	4.25	602007-26-A	FL250/RL250/FL160	11.88	8.00	8.00	706310-3-B
FL280/RL280/FL180	9.12	4.25	4.25	602007-26-A	FL280/RL280/FL180	12.62	8.00	8.00	706310-3-B

- (1) 1"AW CONDUIT.
(2) 1"AW PIPE TAP.
(3) CUSTOMER TO PROVIDE HOLE PER CONDUIT.
(4) 2" DN-5A OR 1" TAP DN-4C

TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM.
TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, V-1, V-4, V-5, V-7,
OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.


REV. DESC: ADD 706310-637 & 639 BOX	VERSION: 06	TDR: 000001180260
REV. LTR: F	REVISED: 11:08:56 10/26/2021	BY: RCGRWM
FILE: \\RGG\00003\692		
MTL: -		

BALDOR - RELIANCE®

DIM SHT NEMA RL210-RL280 FL180-FL280 IEC RDL132-RDL180

SH 1 of 1

422927-001

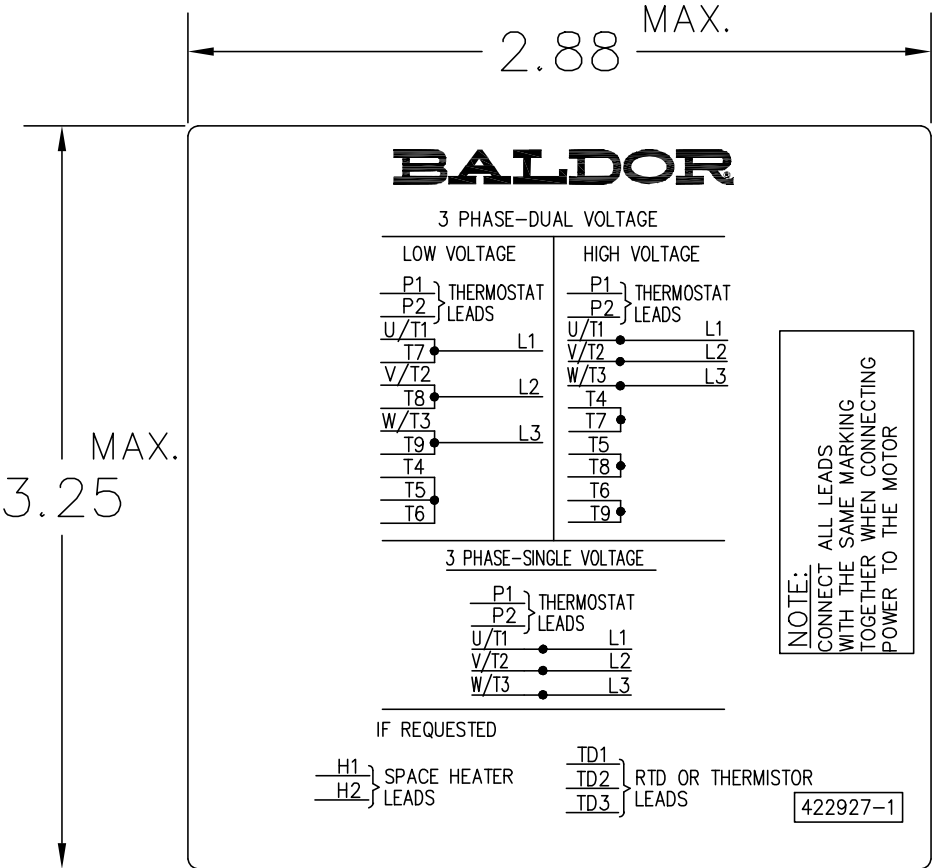

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203	REVISED: 08: 09: 29 03/04/2013	
MTL: -	BY: RGGWT	

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1